



HALO 2

SOLAR LANDSCAPE LIGHT



INTRODUCTION

Product specifications

01 FRONT COVER

02 CATALOG

03 MAIN
ADVANTAGES

04 MAIN
ADVANTAGES

05 SPECIFICATIONS

06 OPTICAL FIGURE

07 DIMENTION
FIGURE

08 LIGHT POLE
DIAGRAM

09 MORE DETAILS

10 CORE
TECHNOLOGY

11 INSTALLATION
INSTRUCTIONS

12 PACKAGE DETAIL


13 APPLICATION




SOLAR ENERGY

LARGE-AREA LIGHTING




DISC DESIGN
SUPER POWER PLAZA LAMP
360-DEGREE FULL COVERAGE

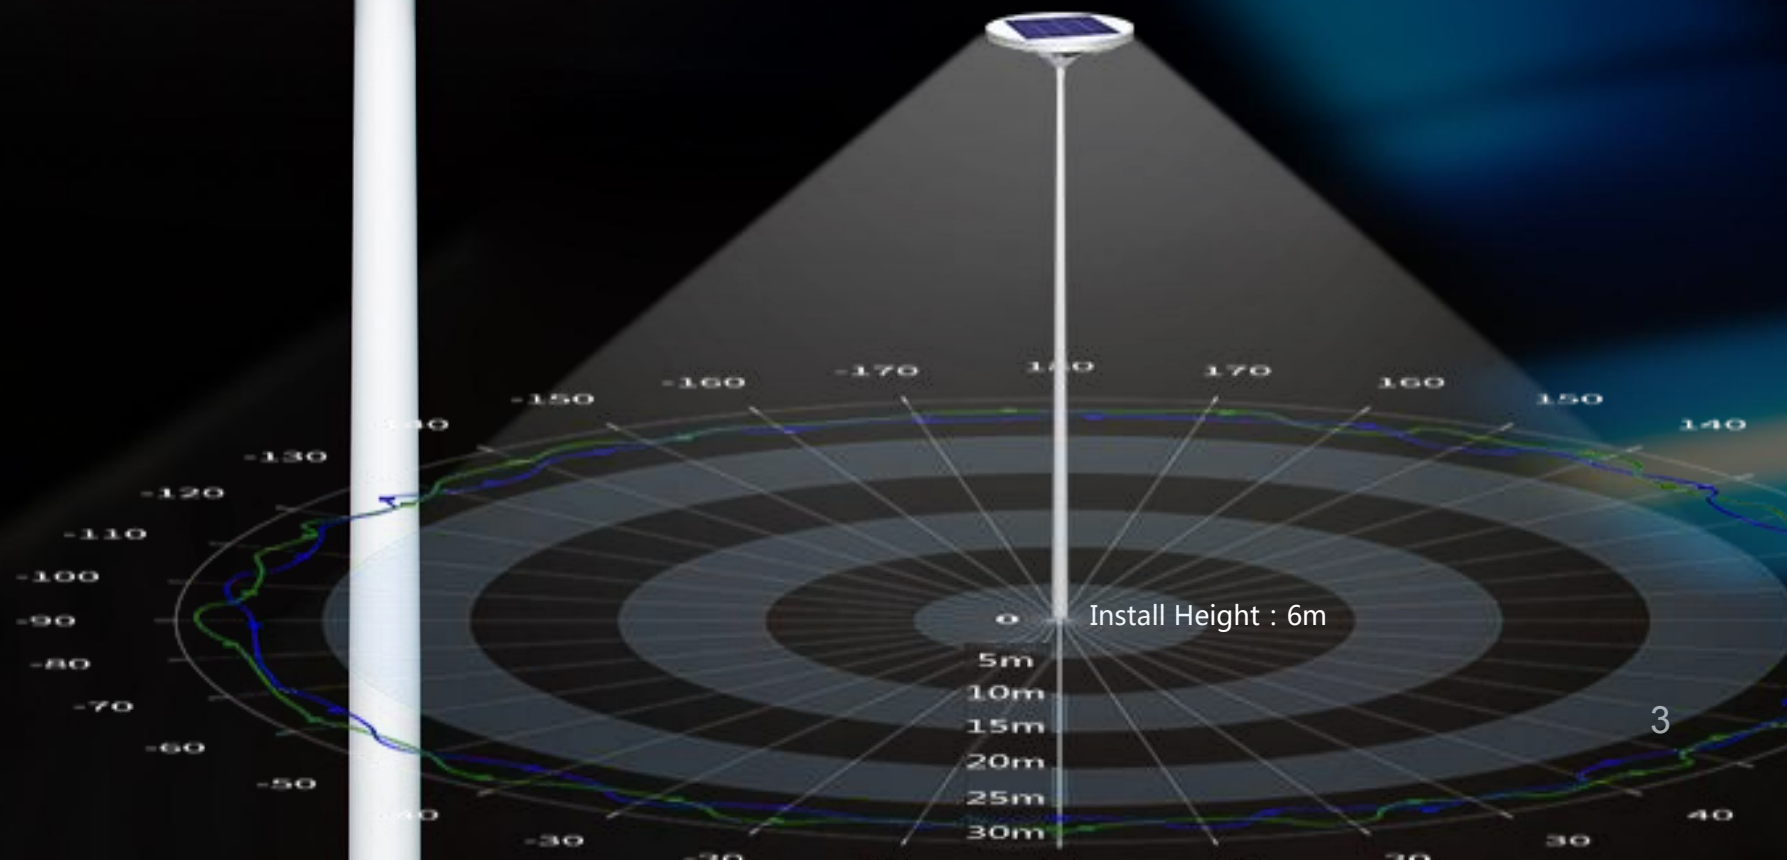

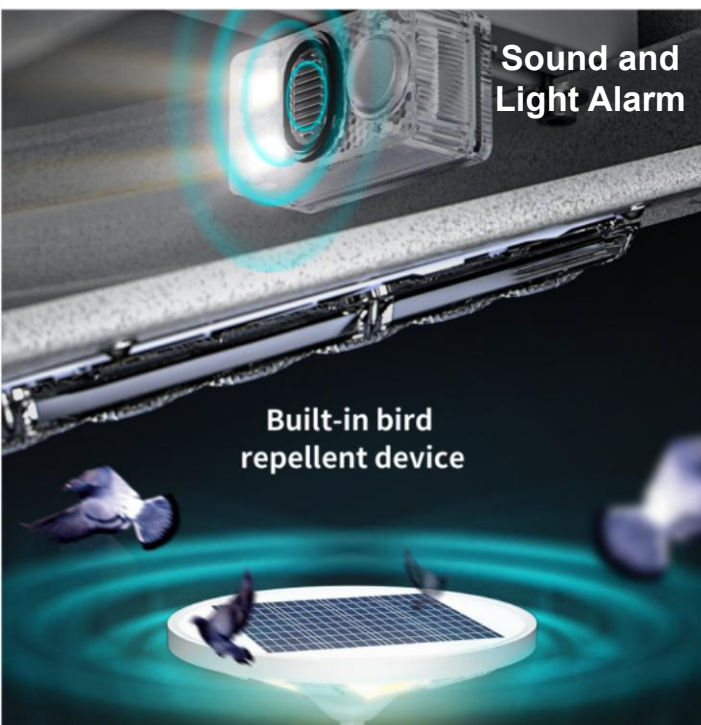


Product Advantage

ALS Technology Guarantees 10 Continuous Working Nights
TCS Technology Ensures Longer Battery Lifespan
Works in Environmental Temperature up to 60°C

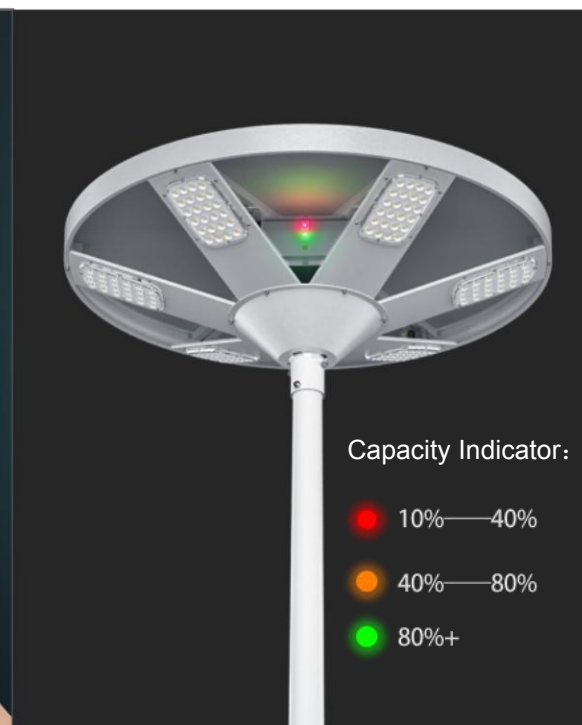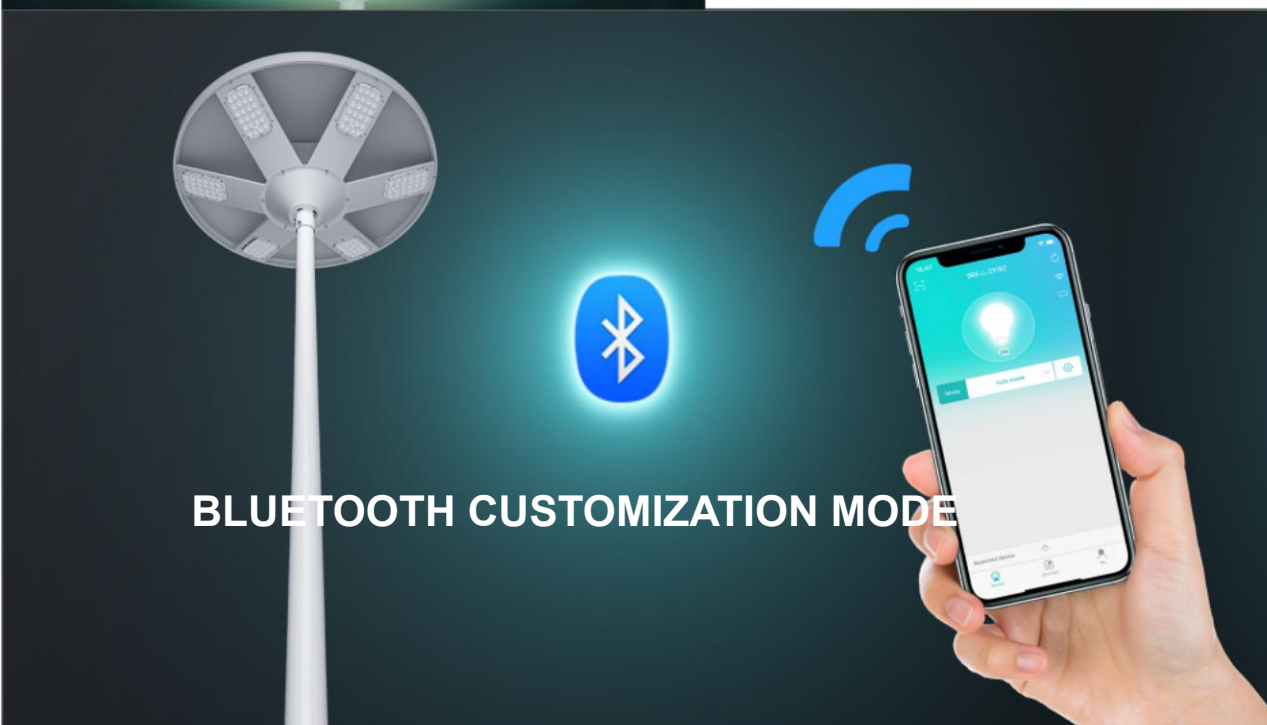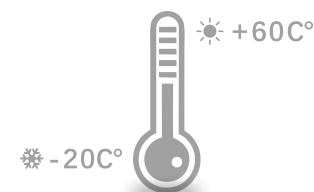


Item : SLL-26	L u m e n : 6000lm
Solar panel	
Power	Monocrystalline , 60.9W
Li-ion battery	
Capacity	14.8V 461.76WH
Charging/Discharging Temp	-20~45°C / -20~60°C
Charging Time	9H
LED (OSRAM)	2835 144pcs
Color Temp	4000K , Ra 80+
Efficiency	190lm/W
UV LED	-
Performance	
Lighting Time in Rainyday	>10 days
Control Mode	Button Switch , ON/OFF Long Press 1.5s
Lighting Mode	M1 : 100% 6000LM(5H) + 20% 1200LM
Mode Indication	-
Capacity Indication	Green Light : ≥80% Orange Light : 40%~80% Red Light : <40%
Other functions	APP Control / Bird Repeller
PIR	-
Core technology	ALS 2.1 / TCS 1.0
Solar Panel Autoclean	-
IP/IK Class	IP65 / IK10
Install Height	6M-12M



Road Simulated Diagram

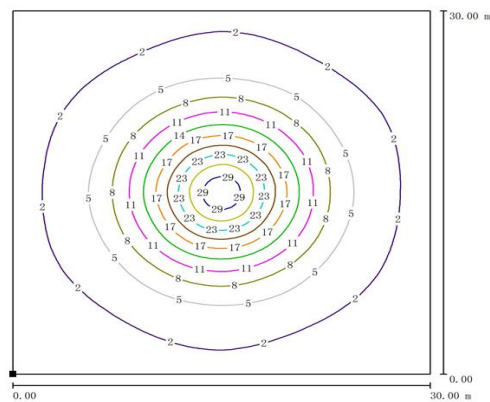


Illumination Curve

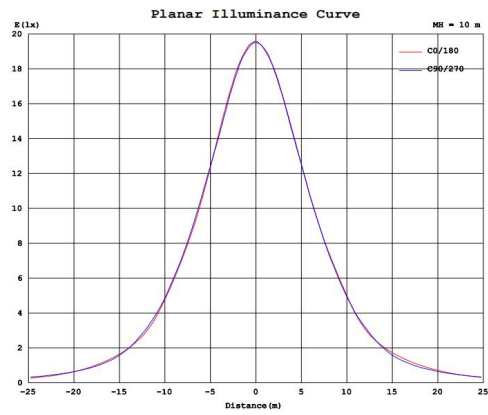

Luminance Distribution

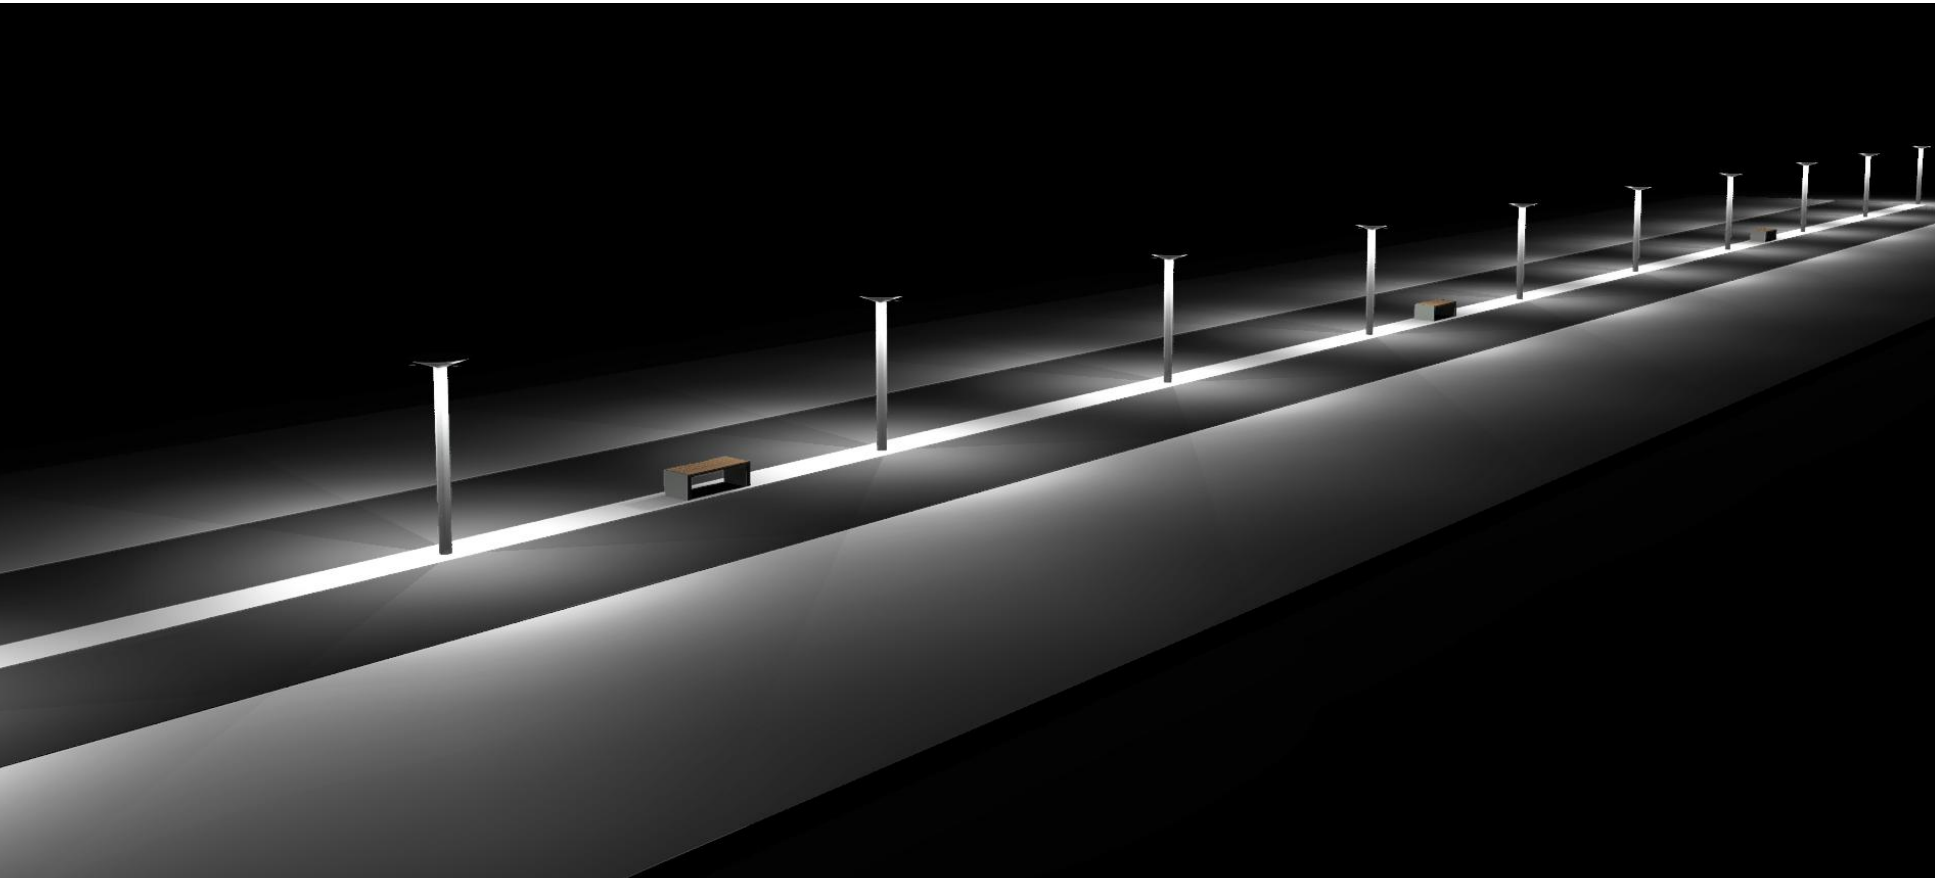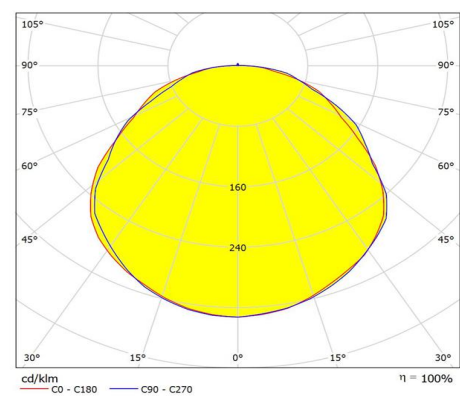

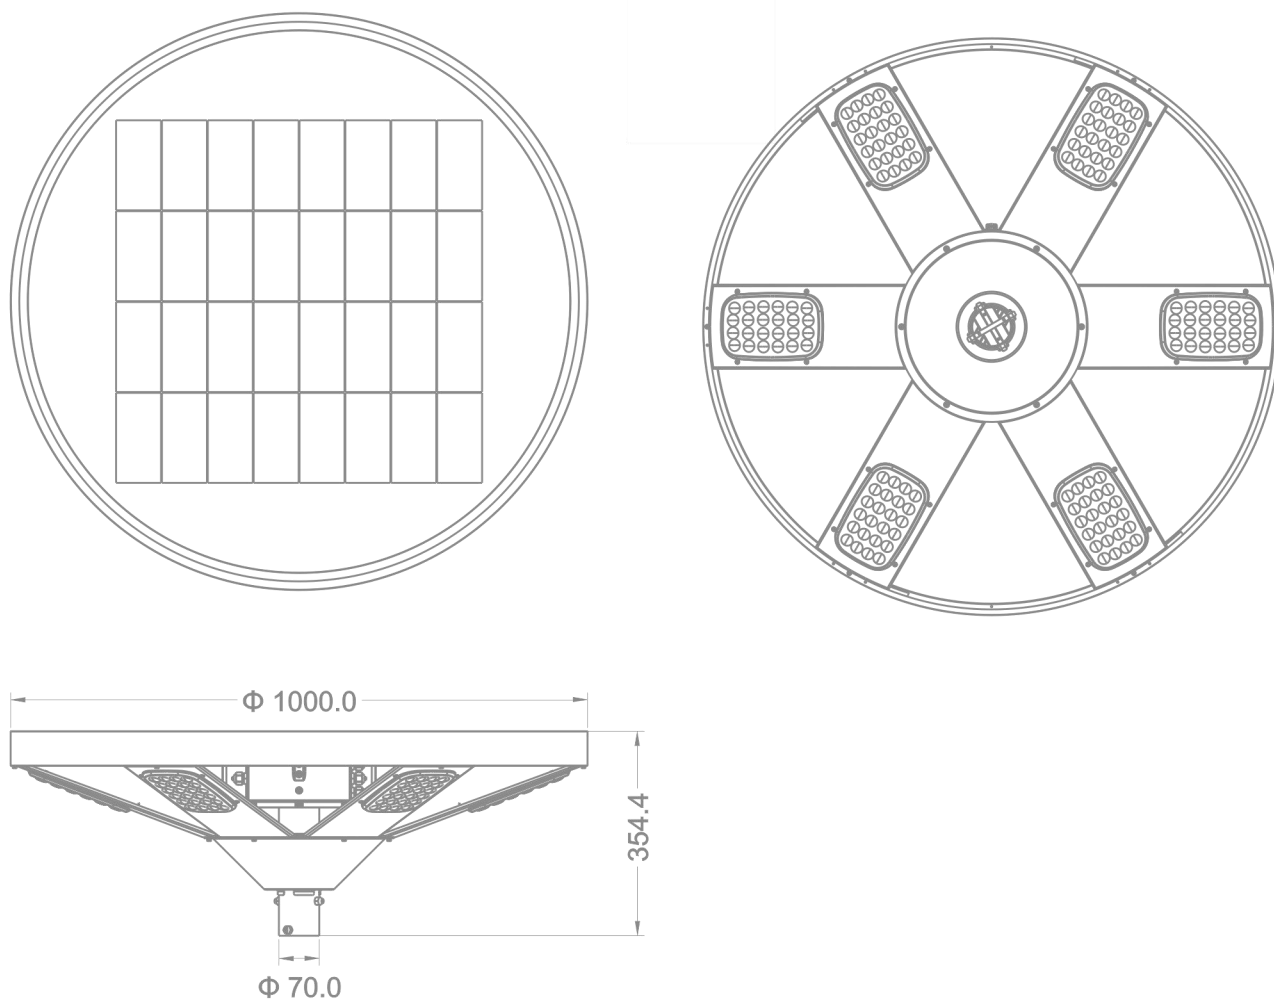




MAX 12M

Detail Benefits



Monocrystalline >21%

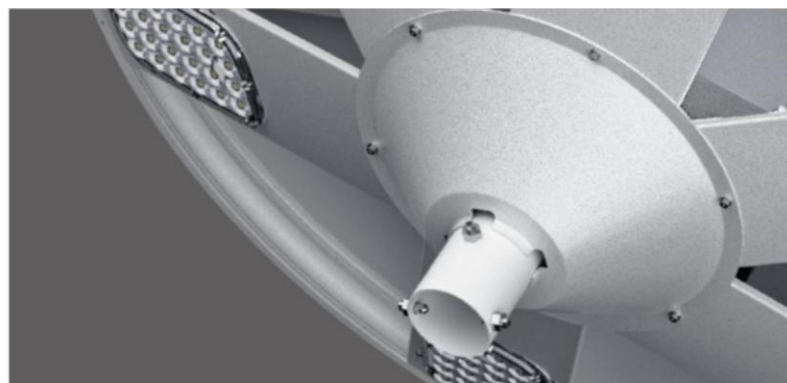

Bracket




1. Battery indicator
2. Bird repeller indicator
3. Switch




High lumen LEDs 190lm/W




A Great Company should always pay the highest attention to the every detail design , and the craftsmanship spirit should be filled in the whole design process and mass production.

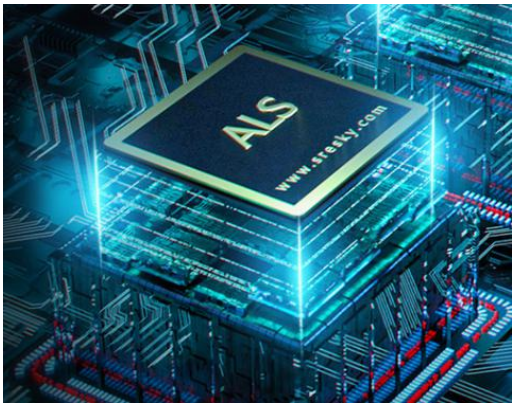


ADVANTAGE OF ALS

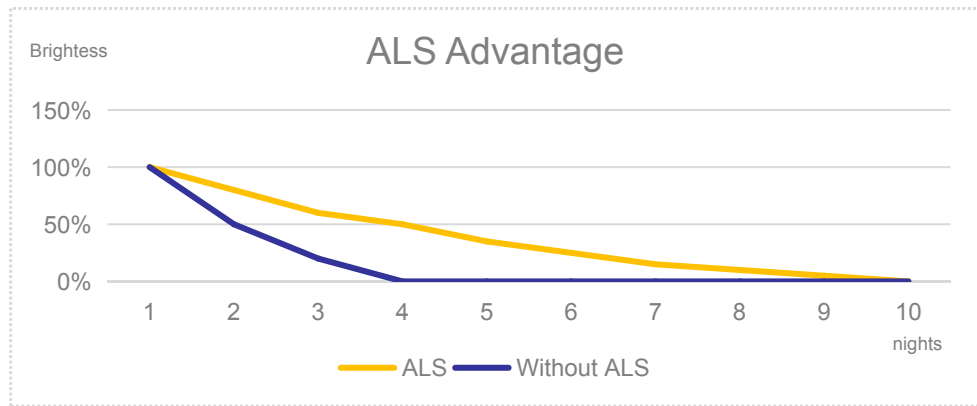


ADVANTAGE OF TCS

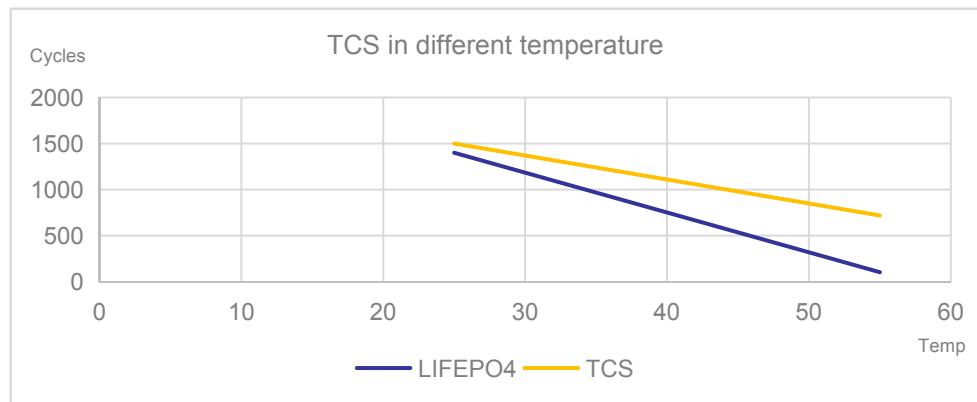

- 1 Dig a hole according to the size of the foundation cage, put the foundation cage into the hole and fix it with concrete C20.

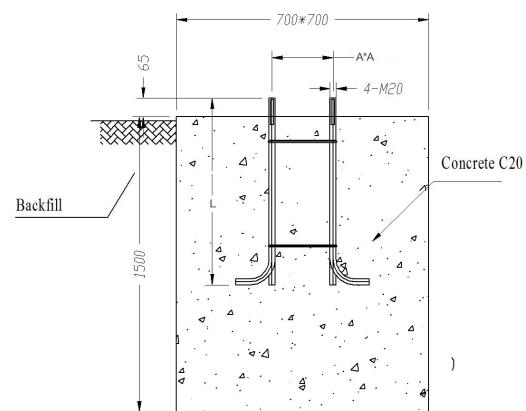


- 3 Lift the lamp pole by the person or machine, align the bottom flange of the lamp pole with the foundation cage, and then fix the lamp pole with screws.

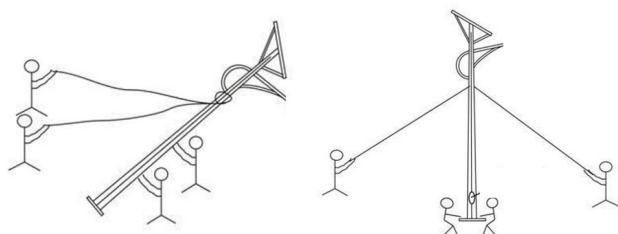


- 2 The first step: installing the sleeve with screws;
Step 2: After unscrewing the 6 setscrews, fix the round tray and lock it with the original screws;
Step 3: install the product on the pole with screws


Step 1

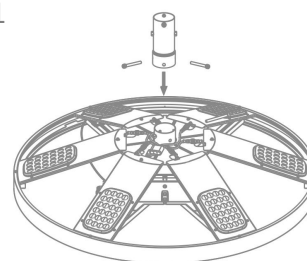


Step 2

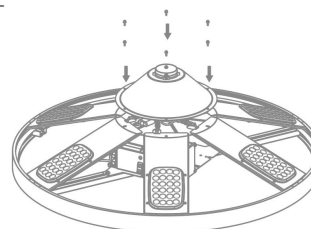

Step 3

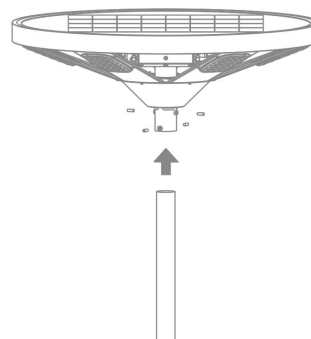

PRODUCT LIST
REMOTE CONTROL : 1 PC

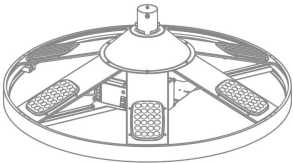

CARTON
SIZE: 1083*310*1085mm
1 PC / 1 BOX



CARTON

PRODUCT LIST

STEP 1

STEP 2

STEP 3

STEP 4

MODEL NO.	PACKING METHOD	PCS/CTN	QTY(PCS)	CTN QTY	CARTON SIZE(MM)	N.W.(KG)	G.W.(KG)
SLL-26	CARTON	1	1	1	1083*310*1085	19	24.28

Net weight and gross weight are for reference only

S / O / L / A / R / L / I / G H / T

THANKS
VERY
MUCH