



light in motion

CATALOGO GENERALE
GENERAL CATALOGUE

INTERIOR LIGHTING SYSTEMS
BUS & COACH
COMMERCIAL AND EMERGENCY VEHICLES
CAMPER CARAVAN





OFOLUX S.r.l. è specializzata da oltre quarant'anni nella progettazione e produzione di sistemi di illuminazione e Interiors per il settore Automotive.

Forte della sua pluriennale esperienza, OFOLux ha raggiunto una capacità produttiva che le permette di realizzare i progetti nelle varie fasi:

- Concezione e styling del prodotto
- Progettazione meccanica ed elettronica
- Prototipazione & Test
- Produzione di serie

Design, qualità e sicurezza sono sempre stati l'obiettivo principale: OFOLUX opera attraverso il proprio sistema di gestione della Qualità ISO 9001:2015 e Ambientale ISO 14001:2015 e realizza tutti i propri prodotti secondo le vigenti norme del settore Automotive:

- **MARCHIO CE** Sicurezza per sistemi di illuminazione in bassissimo voltaggio
- **Regolamento EMC R10** Compatibilità elettromagnetica
- **Regolamento R118.02** Requisiti di comportamento al fuoco dei materiali
- **Direttiva ROHS 2011/65/UE** Limiti per l'uso di sostanze pericolose
- **EN 61347-2-13** Requisiti particolari per moduli LED DC o AC

La sede dell'azienda comprende gli uffici commerciali e tecnici, il magazzino e la produzione.

La struttura operativa della Società è suddivisa secondo le esigenze produttive, in base alle specializzazioni necessarie nei diversi ambiti. La dotazione tecnica si è andata arricchendo di tutti gli strumenti e le attrezzature necessari allo svolgimento completo delle varie fasi.

La gestione dell'azienda è basata su rapporti sereni, di rispetto e collaborazione, indirizzando tutti i propri sforzi per il raggiungimento della qualità totale.

The company OFOLux S.r.l. is specialized in the Design and Manufacture of interior lighting systems & Interiors for the Automotive segment for over 40 years.

Thanks to the experience over the years, OFOLux is able to carry out the projects at various stages:

- Styling concept
- Mechanical and electronic engineering
- Prototyping & Test
- Manufacture.

Right from the start, the manufacture of a quality product has been OFOLux's prime objective: OFOLux operates through its Quality System ISO 9001:2015 and Environmental Management System ISO 14001:2015, and develops all the products according to the current Automotive Standards:

- **CE Mark** Safety for low voltage lighting systems
- **EMC R10** Regulation Electromagnetic compatibility
- **R118.02** Regulation Requirements for fire behavior of materials
- **ROHS 2011/65/UE** Restriction of hazardous substances Directive
- **EN 61347-2-13** Particular requirements for LED DC o AC module

The technical and operating organization has constantly increased in various areas of the company, according to the required qualifications.

The facilities consist of one production plant, including technical and commercial offices, warehouse and production. In this site the tooling equipments are set up for mechanical manufacture, electronic and mechanical assembly, quality control, stock and final dispatch to the customer.

The management of the company is based on good interpersonal relationship and the showing of proper respect for each and every person, directing all the efforts towards the achievement of top quality.



light in motion

FARETTI
SPOTLIGHTS

7

FARETTI FISSI
FIXED SPOTLIGHTS

Art. 32	8
Art. 34	8
Art. 35	8
Art. 35R	9
Art. 35S	9
Art. 50R	9
Art. 50S	10
Art. 50E	10
Art. 50I	10
Art. 1018	11
Art. 1020	11
Art. 1020 - focus lens 30°	11
Art. 1020 - focus lens 90°	12
Art. 1020 - focus lens 25°-40°	12
Art. 1020S	12
Art. 2020	13
Art. 2020 - focus lens 30°	13
Art. 2020F	13
Art. 1029R	14
Art. 1029S	14
Art. 1031	14
Art. 1014	15
Art. 1009	15
Art. 1016	15
Art. 1001	16
Art. 1013	16
Art. 1010A	16
Art. 54S	17

FARETTI ORIENTABILI
ADJUSTABLE SPOTLIGHTS

Art. 1000	19
Art. 1000 - focus lens 25°-40°	19
Art. 1000 - focus lens 30°	19
Art. 1000S	20
Art. 1003	20
Art. 1006C	20
Art. 1006D	21
Art. 1019	21

FARETTI FLESSIBILI
FLEXIBLE SPOTLIGHTS

Art. 90A	23
Art. 90B	23
Art. 90L	23
Art. 90R	24
Art. 90S	24
Art. 90U	24
Art. 92	25
Art. 1005	25

PLAFONIERE
LAMPS

26

PLAFONIERE
LAMPS

Art. 30/30 FLASH	28
Art. 31	28
Art. 37	28
Art. 58S	29
Art. 58L	29
Art. 55S	29
Art. 55L	30
Art. 52R	30
Art. 53R	30
Art. 52R MIRROR	31
Art. 55S MIRROR	31
Art. 59	32
Art. GUCCIO	33
Art. BOOMERANG	33
Art. 160	33
Art. 104 FLAT	34
Art. 104 IP	34
Art. 107 FLAT	34
Art. 81	35
Art. SDM	35
Art. 78 IP	36
Art. 78 FLAT	36

PLAFONIERE DA ESTERNO
OUTDOOR LAMPS

Art. 170	38
Art. 173	38
Art. 174	38
Art. 175M	39
Art. 175S	39
Art. 176	40
Art. SLIM	40

PLAFONIERE LINEARI
LINEAR LAMPS

Art. 301	42
Art. 303/303A	42
Art. 306	42
Art. 304	43
Art. 308	43
Art. GARAGE LAMP	43
Art. 30L	44
Art. FLAT IP	44
Art. FLAT	44
Art. 139	45
Art. 144	45
Art. 110	45
Art. 146	46
Art. 136	46
Art. 137	46
Art. 138	47
Art. 103	47
Art. 300	47

STRIP FLESSIBILI
FLEXIBLE STRIPS

Art. GS	48
Art. FT	48
Art. LINE	49

DIVISIONE ENGINEERING
ENGINEERING DIVISION

50

SISTEMI DI ILLUMINAZIONE
AUTOBUS
LIGHTING SYSTEMS FOR BUS

52

MULTISET

Mod. Diamond	57
Mod. Infinity	58

ACCESSORI
ACCESSORIES

Art. 62/63	59
Art. 116	59
Art. 71	59
Art. 46	59

-  **WATERPROOF PROTECTION**
-  **TOUCH SWITCH**
-  **USB PLUG 2A**
-  **PIR MOTION SENSOR**

OFOLux è a disposizione per realizzare su richiesta altre esecuzioni rispetto alle versioni standard presenti nel catalogo e personalizzazione di prodotto in collaborazione con il cliente.

Ofolux is available to carry out any other executions than standard versions of the catalogue and the customization of product in cooperation with the customers.



FARETTI | SPOTLIGHTS



Serie di faretto realizzati in tecnologia LED, disponibili in varie tipologie (fissi, orientabili, flessibili, da incasso, a base piana), progettati e realizzati da OFOLux in conformità con le Direttive del settore Automotive, sia per quanto riguarda i moduli LED, sia per i materiali di costruzione, offrendo una garanzia di sicurezza del prodotto, affidabilità delle prestazioni e durata nel tempo.

L'ampia gamma di faretto permette di creare ogni tipo di applicazione: illuminazione principale, luci di lettura o di cortesia.

OFOLux è a disposizione per realizzare su richiesta altre esecuzioni rispetto alle versioni standard presenti nel catalogo e personalizzazioni di prodotto in collaborazione con il cliente.

Series of LED spotlights available in several types (fixed, adjustable, recessed or surface mounted), designed and made by OFOLux in compliance with the Automotive Standards not only as regards the LED technology, but also the materials which ensures a guarantee of safety, reliability and long-lasting quality to the products.

The wide range of spotlights allows you to create any type of application (door's and driver's lights, reading lights or main lighting).

OFOLux is available to carry out any other executions than standard versions of the catalogue and the customization of product in cooperation with the customers.



Faretti Fissi | Fixed Spotlights




Art. 32



Faretto fisso ad incasso.
Realizzato in alluminio anodizzato naturale.

*Recess-mounted fixed Spotlight.
Made of anodized aluminum.*

LED	
1 LED Ø 5 mm	
	12 Vdc 10,5 ÷ 16,5 V 24 Vdc 18,5 ÷ 33 V
	120°
	IP 40
	6500K Blue



Art. 34



Faretto fisso ad incasso.
Realizzato in policarbonato satinato trasparente od opale.

*Recess-mounted fixed Spotlight.
Made of satin clear or opal polycarbonate.*



LED	
LV20	
	12 Vdc 10,5 ÷ 16,5 V 24 Vdc 18,5 ÷ 33 V
	120°
	lumen 150
	IP 40
	IP 55
	3000K 4000K 6500K



Art. 35



Faretto fisso ad incasso.
Realizzato in policarbonato satinato trasparente od opale.

*Recess-mounted fixed Spotlight.
Made of satin clear or opal polycarbonate.*



POWER LED	
LV6	
	12/24V DC 10,5 ÷ 33 V
	120°
	lumen 150
	IP 40
	IP 55
	3950K 6000K
LED	
LV7 - 3 LEDs	
	12 Vdc 10,5 ÷ 16,5 V 24 Vdc 18,5 ÷ 33 V
	120°
	lumen 150
	IP 40
	IP 55
	3000K 4000K 6500K



Art. 35R



Faretto fisso con base piana.
Realizzato in policarbonato satinato trasparente od opale.

*Surface-mounted fixed Spotlight.
Diffuser made of satin clear polycarbonate, base made of clear or silver polycarbonate.*

POWER LED	
LV6	
	12/24V DC 10,5 ÷ 33 V
	120°
	lumen 150
	IP 40
	3950K 6000K

LED	
LV7 - 3 LEDs	
	12 Vdc 10,5 ÷ 16,5 V 24 Vdc 18,5 ÷ 33 V
	120°
	lumen 150
	IP 40
	3000K 4000K 6500K



Art. 35S



Faretto fisso con base piana.
Realizzato in policarbonato satinato trasparente od opale.

*Surface-mounted fixed Spotlight.
Made of satin clear or opal polycarbonate.*

POWER LED	
LV6	
	12/24V DC 10,5 ÷ 33 V
	120°
	lumen 150
	IP 40
	3950K 6000K

LED	
LV7 - 3 LEDs	
	12 Vdc 10,5 ÷ 16,5 V 24 Vdc 18,5 ÷ 33 V
	120°
	lumen 150
	IP 40
	3000K 4000K 6500K



Art. 50R



Faretto fisso con base piana.
Schermo in policarbonato satinato trasparente, base in policarbonato trasparente o silver.

*Surface-mounted fixed Spotlight.
Diffuser made of satin clear polycarbonate, base made of clear or silver polycarbonate.*

LED	
LV9 - 6 LEDs	
	12 Vdc 10,5 ÷ 16,5 V 24 Vdc 18,5 ÷ 33 V
	120°
	lumen 200
	IP 40
	3000K 4000K 6500K



Art. 50S



Faretto fisso con base piana.
Schermo in policarbonato satinato trasparente, base in policarbonato trasparente o silver.

*Surface-mounted fixed Spotlight.
Diffuser made of satin clear polycarbonate, base made of clear or silver polycarbonate.*

LED		LV9 - 6 LEDs				
	12 Vdc		lumen	IP	3000K	4000K
	10,5 + 16,5 V					
	24 Vdc		200	40	6500K	
	18,5 + 33 V					

Art. 50E



Faretto fisso con base piana.
Schermo in policarbonato satinato trasparente, base in policarbonato trasparente o silver.

*Surface-mounted fixed Spotlight.
Diffuser made of satin clear polycarbonate, base made of clear or silver polycarbonate.*

LED		LV9 - 6 LEDs				
	12 Vdc		lumen	IP	3000K	4000K
	10,5 + 16,5 V					
	24 Vdc		200	40	6500K	
	18,5 + 33 V					

Art. 50I



Faretto a base piana, con grado di protezione IP65.
Struttura in policarbonato trasparente antiurto.

*Surface-mounted Spotlight, with IP65 protection.
Base made of clear impact-resistant polycarbonate.*

LED		LV19 - 6 LEDs				
	12/24V DC		lumen	IP	3000K	4000K
	8,4 + 33 V					
			200	65	6500K	



Art. 1018



Faretto fisso ad incasso.
Schermo in policarbonato trasparente, corpo in ABS cromato.
Disponibile anche con Led RGB.

*Recess-mounted fixed Spotlight.
Diffuser made of clear polycarbonate, base made of glossy chrome ABS.
Available also with RGB Led.*

LED		LV20 - 3 LEDs				
	12 Vdc		lumen	IP	3000K	4000K
	10,5 + 16,5 V					
	24 Vdc		150	40	6500K	
	18,5 + 33 V					

LED		RGB - LV23			
	12/24V DC		RGB	IP	65
	8,4 + 33 V				

Art. 1020



Faretto fisso ad incasso.
Schermo in policarbonato trasparente satinato, base in policarbonato bianco, cornice tonda in ABS cromato o silver.
Disponibile con accensione "Touch ON/OFF".

*Recess-mounted fixed Spotlight.
Diffuser made of satin clear polycarbonate, base made of white polycarbonate, round frame made of glossy chrome or silver polycarbonate.
Available with "ON/OFF Touch" switch.*

LED		LV11 - 6 LEDs				
	12 Vdc		lumen	IP	3000K	4000K
	10,5 + 16,5 V					
	24 Vdc		200	40	6500K	
	18,5 + 33 V					


Art. 1020 - focus lens 30°



Faretto fisso ad incasso ad alta intensità luminosa e dotato di lente focalizzante da 30° per ottenere un fascio luminoso concentrato.
E' disponibile anche con luce Led blu notturna.

*Recess-mounted fixed Spotlight supplied with high lighting intensity Led and focus lens 30° for a concentrated beam of light.
Optional night blue Led light is available.*

LED		LV11 - 6 LEDs				
	12 Vdc		lumen	IP	3000K	4000K
	10,5 + 16,5 V					
	24 Vdc		200	40	6500K	
	18,5 + 33 V					



Art. 1020 - focus lens 90°



Faretto fisso ad incasso ad alta intensità luminosa e dotato di lente focalizzante da 90° per ottenere un fascio luminoso concentrato. E' disponibile anche con luce Led blu notturna e con accensione sdoppiata.

Recess-mounted fixed Spotlight supplied with high lighting intensity Led and focus lens 90° for a concentrated beam of light. It's available with optional night blue Led light and double step lighting.

LED		LV38 - 12 LEDs	
	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V		120°
	300		IP 40
	3000K 4000K 6500K		

Art. 1020 - focus lens 25°/40°



Faretto fisso ad incasso con power Led ad alta intensità luminosa e dotato di lente focalizzante da 25° o 40° per ottenere un fascio luminoso concentrato. E' disponibile anche con luce Led blu notturna e con accensione sdoppiata.

Recess-mounted fixed Spotlight supplied with high lighting intensity Led and focus lens 90° for a concentrated beam of light. It's available with optional night blue Led light and double step lighting.

POWER LED		LV4 - 1 LED	
	12/24V DC 8,4 + 33 V		140°
	25° 40°		230 @ 700mA
	IP 40		3950K 6000K
POWER LED		TRV2 - 3 LEDs	
	12/24V DC 8,4 + 33 V		140°
	25° 40°		405 @ 350mA
	690 @ 700mA		IP 40
	3950K 6000K		


Art. 1020S



Faretto fisso con base ad incasso. Schermo satinato in policarbonato trasparente, base in policarbonato bianco, cornice quadrata in ABS cromato o silver. Disponibile con accensione "Touch ON/OFF".

Recess-mounted fixed Spotlight. Diffuser made of satin clear polycarbonate, base made of white polycarbonate, square frame made of glossy chrome or silver polycarbonate. Available with "ON/OFF Touch" switch.

LED		LV11 - 6 LEDs	
	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V		120°
	200		IP 40
	3000K 4000K 6500K		



Art. 2020



Faretto fisso ad incasso. Schermo in policarbonato opale, base in policarbonato bianco, cornice tonda in ABS cromato o silver. Disponibile con accensione "Touch ON/OFF".

Recess-mounted fixed spotlight. Diffuser made of opal polycarbonate, base made of white polycarbonate, frame made of chrome or silver ABS. Available with "ON/OFF Touch" switch.

LED		LV34 - 3 LEDs	
	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V		120°
	150		IP 40
	3000K 4000K 6500K		

LED		LV34 - 6 LEDs	
	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V		120°
	200		IP 40
	3000K 4000K 6500K		

Art. 2020 - focus lens 30°



Faretto fisso ad incasso ad alta intensità luminosa e dotato di lente focalizzante da 30° per ottenere un fascio luminoso concentrato. E' disponibile anche con luce Led blu notturna.

Recess-mounted fixed spotlight supplied with high lighting intensity Led and focus lens 30° for a concentrated beam of light. Optional night blue Led light is available.

LED		LV11 - 6 LEDs	
	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V		30°
	200		IP 40
	3000K 4000K 6500K		

Art. 2020F



Faretto fisso con base piana e con minima sporgenza (solo 9mm). Cornice tonda in ABS cromato o silver. Disponibile con accensione "Touch ON/OFF".

Surface-mounted fixed Spotlight with minimum protrusion (only 9mm). Round frame made of chrome or silver ABS. Available with "ON/OFF Touch" switch.

LED		LV34 - 3 LEDs	
	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V		120°
	150		IP 40
	3000K 4000K 6500K		

LED		LV34 - 6 LEDs	
	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V		120°
	200		IP 40
	3000K 4000K 6500K		



Art. 1029R




Faretto fisso a base piana o ad incasso con minima sporgenza.
Base in ABS, schermo in policarbonato con cornice magnetica.
Colori disponibili: silver, cromo lucido, cromo spazzolato.
Disponibile con accensione "Touch ON/OFF" o con Touch dimmerabile 0-100%.




Surface-mounted or recess-mounted fixed Spotlight with minimum protrusion.
Base made of ABS, diffuser made of polycarbonate with magnetic frame.
Available colors: silver, glossy chrome, brushed chrome.
Available with "ON/OFF Touch" switch or dimmable Touch switch 0-100%.

LED

	12 Vdc 10,5 ÷ 16,5 V		120°		lumen 200		IP 40		3000K 4000K 6500K
--	-------------------------	--	------	--	--------------	--	-------	--	-------------------------

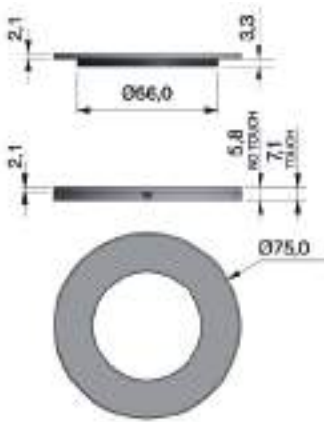

Art. 1029S




Faretto fisso a base piana o ad incasso con minima sporgenza.
Base in ABS, schermo in policarbonato con cornice magnetica.
Colori disponibili: silver, cromo lucido, cromo spazzolato.

Surface-mounted or recess-mounted fixed Spotlight with minimum protrusion.
Base made of ABS, diffuser made of polycarbonate with magnetic frame.
Available colors: silver, glossy chrome, brushed chrome.

LED

	12 Vdc 10,5 ÷ 16,5 V		120°		lumen 200		IP 40		3000K 4000K 6500K
--	-------------------------	--	------	--	--------------	--	-------	--	-------------------------



Art. 1031



Faretto fisso ad incasso provvisto di protezione IP65.
Base in ABS, schermo in policarbonato.
Disponibile cromo lucido.

Recess-mounted fixed spotlight with IP65 protection.
Base made of ABS, diffuser made of polycarbonate.
Available glossy chrome.



LED

3 LEDs

	12 Vdc 10,5 ÷ 16,5 V		120°		lumen 150		IP 65		3000K 4000K 6500K
--	-------------------------	--	------	--	--------------	--	-------	--	-------------------------

LED

6 LEDs

	12 Vdc 10,5 ÷ 16,5 V		120°		lumen 200		IP 40		3000K 4000K 6500K
--	-------------------------	--	------	--	--------------	--	-------	--	-------------------------



Art. 1014



Faretto fisso con base piana.
Corpo in alluminio anodizzato naturale, schermo in policarbonato satinato.

Surface-mounted fixed Spotlight.
Base made of natural anodized aluminum, diffuser made of satin polycarbonate.



LED

LV39 - 6 LEDs

	12 Vdc 10,5 ÷ 16,5 V		140°		lumen 200		IP 44		3000K 4000K 6500K
--	-------------------------	--	------	--	--------------	--	-------	--	-------------------------

POWER LED

TRV3

	12 Vdc 10,5 ÷ 16,5 V		140°		lumen 550		IP 40		3950K 6000K
--	-------------------------	--	------	--	--------------	--	-------	--	----------------



Art. 1009



Faretto fisso ad incasso, protetto IP65.
Corpo in alluminio anodizzato naturale.
Completo di lente focalizzante 25° o 40°.
Particolarmente indicato come luce di segnalazione per veicoli di soccorso.

Recess-mounted fixed Spotlight, waterproof IP65.
Base made of natural anodized aluminum.
Supplied with focus lens 25° or 40°.
Especially designed for rear signaling light in emergency vehicles.



POWER LED

TRV3

	12/24V DC 8,4 ÷ 33 V		6°		25°		40°		lumen 550		IP 65		6000K Amber
--	----------------------------	--	----	--	-----	--	-----	--	--------------	--	-------	--	----------------



Art. 1016



Faretto fisso ad incasso, protetto IP65.
Corpo in alluminio anodizzato naturale.
Completo di lente focalizzante 25°.
Particolarmente indicato come luce di segnalazione per veicoli di soccorso.

Recess-mounted fixed Spotlight, waterproof IP65.
Base made of natural anodized aluminum.
Supplied with focus lens 25°.
Especially designed for rear signaling light in emergency vehicles.



POWER LED

LV26 - 3 LEDs or 6 LEDs


	12/24V DC 8,4 ÷ 33 V		25°		lumen 420		lumen 840		IP 65		6000K Amber
--	----------------------------	--	-----	--	--------------	--	--------------	--	-------	--	----------------





Art. 1001
Faretto fisso ad incasso.
Base in metallo cromato o satinato, vetro di protezione satinato.
*Recess-mounted fixed Spotlight.
Body made of glossy chrome or matt chrome metal, protective satin glass diffuser.*

LED	LV43 - 6 LEDs
12 Vdc 10,5 ÷ 16,5 V 24 Vdc 18,5 ÷ 33 V	120°
lumen 200	IP 40
3000K 4000K 6500K	



Art. 1013
Faretto fisso ad incasso.
Base in metallo cromato o satinato, vetro di protezione satinato.
*Recess-mounted fixed Spotlight.
Base made of glossy chrome or matt chrome metal, protective satin glass diffuser.*

LED	LV34 - 6 LEDs
12 Vdc 10,5 ÷ 16,5 V 24 Vdc 18,5 ÷ 33 V	120°
lumen 200	IP 40
3000K 4000K 6500K	




Art. 1010A
Faretto fisso con base piana.
Base in ABS silver o cromo, schermo in policarbonato trasparente satinato.
*Surface-mounted fixed Spotlight.
Base made of silver or chrome ABS, diffuser made of satin clear polycarbonate.*

LED	LV9 - 6 LEDs
12 Vdc 10,5 ÷ 16,5 V 24 Vdc 18,5 ÷ 33 V	120°
lumen 200	IP 40
3000K 4000K 6500K	



Art. 54S
Faretto fisso con base piana.
Base in ABS silver, schermo in policarbonato trasparente satinato.
Disponibile con luce blu notturna.
*Surface-mounted fixed Spotlight.
Base made of silver ABS, diffuser made of satin clear polycarbonate.
It is available with night blue Led.*

LED	LV14 - 9 LEDs
12 Vdc 10,5 ÷ 16,5 V 24 Vdc 18,5 ÷ 33 V	120°
lumen 150	IP 40
3000K 4000K 6500K	



light in motion



Art. 1000



Faretto orientabile ad incasso. Schermo in policarbonato, corpo in nylon nero, cornice tonda in metallo cromato o satinato. Disponibile con accensione "Touch".

Recess-mounted adjustable Spotlight. Diffuser made of polycarbonate, body made of black nylon, round frame made of glossy chrome or matt chrome metal. Available with "ON/OFF Touch" switch.

LED LV11 - 6 LEDs

12 Vdc 10,5 + 16,5 V	24 Vdc 18,5 + 33 V	120°	lumen 200	IP 40	3000K 4000K 6500K
-------------------------	-----------------------	------	--------------	-------	-------------------------



Art. 1000 - focus lens 25°/40°



Faretto orientabile con base ad incasso. Power Led ad alta intensità luminosa e dotato di lente focalizzante da 25° o 40° per ottenere un fascio luminoso concentrato. E' disponibile anche con luce Led blu notturna.

Recess-mounted adjustable Spotlight. Power high lighting intensity Led and focus lens 25° or 40° for a concentrated beam of light. It's available with optional night blue Led light.

POWER LED LV4

12/24V DC 10,5 + 33 V	140°	25° 40°	lumen 250 @700mA	IP 40	3950K 6000K
-----------------------------	------	------------	------------------------	-------	----------------



Art. 1000 - focus lens 30°



Faretto orientabile ad incasso ad alta intensità luminosa e dotato di lente focalizzante da 30° per ottenere un fascio luminoso concentrato. E' disponibile anche con luce Led blu notturna. Disponibile anche con accensione "Touch"

Recess-mounted adjustable Spotlight supplied with high lighting intensity Led and focus lens 30° for a concentrated beam of light. Optional night blue Led light is available. Available with "ON/OFF Touch" Switch

LED LV11 - 6 LEDs

12 Vdc 10,5 + 16,5 V	24 Vdc 18,5 + 33 V	30°	lumen 200	IP 40	3000K 4000K 6500K
-------------------------	-----------------------	-----	--------------	-------	-------------------------



Art. 1000S



Faretto orientabile con base ad incasso. Schermo in policarbonato, corpo in nylon nero, cornice quadrata in metallo cromato o satinato. Disponibile con accensione "Touch".



Recess-mounted adjustable Spotlight. Diffuser made of polycarbonate, body made of black nylon, square frame made of glossy chrome or matt chrome metal. Available with "ON/OFF Touch" switch.

LED LV11 - 6 LEDs

	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V	 120°	lumen 200	IP 40	3000K 4000K 6500K
--	--	----------	--------------	-------	-------------------------



Art. 1003



Faretto orientabile con base piana con interruttore. Schermo in policarbonato, corpo in nylon nero, base in policarbonato grigio o silver, cornice in metallo cromato o satinato.

Surface-mounted adjustable Spotlight, switched base. Diffuser made of polycarbonate, body made of black nylon, base made of gray or silver ABS, frame made of glossy chrome or matt chrome metal.

LED LV11 - 6 LEDs

	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V	 120°	lumen 200	IP 40	3000K 4000K 6500K
--	--	----------	--------------	-------	-------------------------



Art. 1006C



Faretto con base piana girevole con interruttore. Schermo in policarbonato trasparente satinato, base in ABS grigio o silver, faretto in metallo colore silver.

Surface-mounted swivel Spotlight, switched base. Diffuser made of clear satin polycarbonate, base made of gray or silver ABS, spot's body made of silver metal.

LED LV9 - LEDs

	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V	 120°	lumen 200	IP 40	3000K 4000K 6500K
--	--	----------	--------------	-------	-------------------------



Art. 1006D



Faretto orientabile con base piana con interruttore. Schermo in policarbonato, base in ABS grigio o silver, cornice in metallo cromato o satinato.

Surface-mounted adjustable Spotlight, switched base. Diffuser made of polycarbonate, base made of gray or silver ABS, frame made of matt chrome or glossy chrome metal.

LED LV11 - 6 LEDs

	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V	 120°	lumen 200	IP 40	3000K 4000K 6500K
--	--	----------	--------------	-------	-------------------------



Art. 1019




Faretto orientabile ad incasso. Diffusore in policarbonato trasparente, base in alluminio silver.

Surface-mounted adjustable Spotlight. Diffuser made of clear polycarbonate, base made of silver aluminum.

LED LV15 - 6 LEDs

	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V	 120°	lumen 150	IP 40	3000K 4000K 6500K
--	--	----------	--------------	-------	-------------------------



light in motion



Art. 90A

Faretto con base piana, completo di interruttore. Schermo in policarbonato trasparente, base e holder in ABS cromo lucido, braccetto flessibile in metallo cromato.

Surface-mounted Spotlight, switched base. Diffuser made of clear polycarbonate, base and holder made of glossy chrome ABS, flexible arm made of glossy chrome metal.



LED LV9 - 6 LEDs

III	12 Vdc 10,5 ÷ 16,5 V 24 Vdc 18,5 ÷ 33 V	120°	lumen 200	IP 40	3000K 4000K 6500K
-----	--	------	--------------	-------	-------------------------



Art. 90B

Faretto con base piana, completo di interruttore. Schermo in policarbonato trasparente, base e holder in ABS cromo lucido, braccetto snodato in metallo cromato.

Surface-mounted Spotlight, switched base. Diffuser made of clear polycarbonate, base and holder made of glossy chrome ABS, swivel arm made of glossy chrome metal.



LED LV9 - 6 LEDs

III	12 Vdc 10,5 ÷ 16,5 V 24 Vdc 18,5 ÷ 33 V	120°	lumen 200	IP 40	3000K 4000K 6500K
-----	--	------	--------------	-------	-------------------------



Art. 90L

Faretto con base piana, completo di interruttore. Schermo in policarbonato opale satinato, base e holder in ABS cromo lucido, braccetto flessibile in metallo cromato.

Surface-mounted Spotlight, switched base. Diffuser made of satin opal polycarbonate, base and holder made of glossy chrome ABS, flexible arm made of glossy chrome metal.



LED LV15 - 6 LEDs

III	12 Vdc 10,5 ÷ 16,5 V 24 Vdc 18,5 ÷ 33 V	120°	lumen 150	IP 40	3000K 4000K 6500K
-----	--	------	--------------	-------	-------------------------



Art. 90R



Faretto con base piana, completo di interruttore. Lente in metacrilato trasparente, base e holder in ABS cromo lucido, braccetto flessibile in metallo cromato.

Surface-mounted Spotlight, switched base. Lens made of clear methacrylate, base and holder made of glossy chrome ABS, flexible arm made of glossy chrome metal.

LED		LV15 - 6 LEDs				
	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V		lumen 150	IP 40	3000K 4000K 6500K	



Art. 90S



Faretto con base piana, completo di interruttore. Schermo in policarbonato opale satinato, base e holder in ABS cromo lucido, braccetto flessibile in metallo cromato.

Surface-mounted Spotlight, switched base. Diffuser made of satin opal polycarbonate, base and holder made of glossy chrome ABS, flexible arm made of glossy chrome metal.

LED		LV15 - 6 LEDs				
	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V		lumen 150	IP 40	3000K 4000K 6500K	



Art. 90U



Art. 90USB-01



Art. 90USB-04

Faretto con base piana, provvisto di presa USB (2A). Holder in ABS cromo lucido disponibile in due versioni: art. 90USB-01 e art. 90USB-04. Braccetto flessibile o snodato in metallo cromato. Disponibile con accensione mediante sensore Touch su tutta la superficie della base.

Surface-mounted Spotlight, provided with USB socket (2A). Holder made of glossy chrome ABS available in two versions: art. 90USB-01 and art. 90USB-04. Flexible or swivel arm made of glossy chrome metal. Available with ON/OFF Touch switch sensor on the whole surface of the base.

LED		LV9 or LV15 - 6 LEDs				
	12 Vdc 10,5 + 16,5 V		lumen 100	lumen 200	IP 40	3000K 4000K 6500K



Art. 92



Faretto a base piana con braccetto flessibile, provvisto di presa USB (2A) e accensione mediante sensore Touch con tre step di illuminazione: 1-Luce lettura focalizzata / 2-Luce diffusa / 3-Luce lettura focalizzata + luce diffusa. Disponibile con finitura cromo lucido.

Surface-mounted Spotlight with flexible arm, provided with USB socket (2A) and ON-OFF by Touch sensor switch, available with three lighting steps: 1-Focused reading light / 2-Diffused light / 3-Light focused reading+diffused light. Available in glossy chrome finishing.

LED



12Vdc
10,5+16,5 V



100°
READING



170°
DIFFUSED



100°
READING+
DIFFUSED

lumen 110
READING

lumen 15
DIFFUSED

lumen 125
READING+
DIFFUSED

IP 40

4000K
READING

3000K
DIFFUSING



Art. 1005



Faretto leggi mappa con supporto per fissaggio a vite, completo di interruttore a luce dimmerabile. Braccetto flessibile in metallo silver, diffusore in ABS silver.

Map reading Spotlight supplied with screw fixing support, with dimmable switch. Flexible arm made of silver metal, diffuser made of silver ABS.

LED		2835 - 18 LEDs				
	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V		lumen 100	IP 40	3950K 6000K	



light in motion



Serie di plafoniere realizzate in tecnologia LED, disponibili sia per illuminazione interna che esterna. Tutti gli articoli sono progettati e realizzati da OFOLux in conformità alle Direttive del settore Automotive, sia per quanto riguarda i moduli LED sia per i materiali di costruzione offrendo una ulteriore garanzia di sicurezza del prodotto, affidabilità delle prestazioni e durata nel tempo. L'ampia gamma di articoli ci permette di offrire un'illuminazione adatta per ogni tipo di applicazione ed esigenza, comprendendo plafoniere per illuminazione interna ed esterna con grado di protezione all'acqua. OFOLux è a disposizione per realizzare su richiesta altre esecuzioni rispetto alle versioni standard presenti nel catalogo e personalizzazioni di prodotto in collaborazione con il cliente.

Series of lamps made in LED technology, available for both interior and outdoor lighting. All items are designed and made by OFOLux in compliance with the Automotive Standards not only as regards the LED technology, but also for the materials, which ensures a further guarantee of safety, reliability and long-lasting quality to the products. The wide range of lights allows you to create any type of application for interior or exterior lighting with IP grade protection. OFOLux is available to carry out any other executions than standard versions of the catalogue and the customization of product in cooperation with the customers.



Art. 30/30 FLASH

Plafoniera disponibile con base piana (IP20) o ad incasso (IP65).
Struttura in policarbonato trasparente o blu.
Disponibile nella versione con luce ad intermittenza (Art. 30 FLASH).

Surface (IP20) or recess-mounted (IP65) light.
Body made of clear or blue polycarbonate. Available with blinking light (Art. 30 FLASH).

3 LEDs



12/24V
DC
5,4 ÷ 33 V



120°


IP 40

IP 65



6500K
Blue



IP40



IP65



Art. 31

Plafoniera con base piana completa di interruttore.
Struttura in policarbonato trasparente, base in ABS bianco o grigio.

Surface-mounted lamp with switched base.
Body made of clear polycarbonate, base made of white or gray ABS.

3 LEDs



12/24V
DC
5,4 ÷ 33 V



120°

IP 40

6500K

Art. 37

Plafoniera con base piana indicata per illuminazione di segnalazione ad intermittenza.
Disponibile con resina trasparente protettiva o con lente in policarbonato trasparente, protezione IP67.
Master o slave collegabili fino a 4 slave in parallelo.

Surface-mounted light particularly developed for signal blinking light.
Available with clear resin or polycarbonate lens, waterproof IP67.
Master or slave, it can be connected up to 4 slaves in parallel.

LED

LV37 3 LEDs



12Vdc
10,5 ÷ 16,5 V




10°

IP 67

6000K
Amber
Blue

UNECE
R65

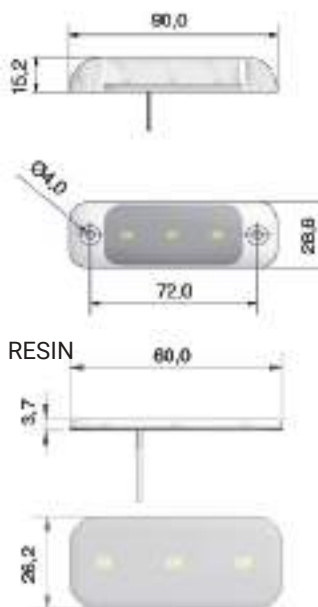

RESIN

Art. 58S

Plafoniera a base piana con effetto luce diffusa.
Base in ABS, schermo in policarbonato con cornice magnetica.
Colori disponibili: silver, cromo lucido, cromo spazzolato.

Surface-mounted Lamp with minimum protrusion.
Base made of ABS, diffuser made of polycarbonate with magnetic frame.
Available colors: silver, glossy chrome, brushed chrome.

LED



12Vdc
10,5 ÷ 16,5 V




120°

lumen
600

IP 40

3000K
4000K
6500K



Art. 58L

Plafoniera a base piana con effetto luce diffusa.
Base in ABS, schermo in policarbonato con cornice magnetica.
Colori disponibili: silver, cromo lucido, cromo spazzolato.

Surface-mounted Lamp with minimum protrusion.
Base made of ABS, diffuser made of polycarbonate with magnetic frame.
Available colors: silver, glossy chrome, brushed chrome.

LED



12Vdc
10,5 ÷ 16,5 V




120°

lumen
250

IP 40

3000K
4000K
6500K



Art. 55S

Plafoniera con base piana.
Schermo in policarbonato opale, base in policarbonato bianco.
Disponibile con interruttore Touch ON/OFF.

Surface-mounted light.
Diffuser made of satin polycarbonate, base made of white polycarbonate.
Available with ON/OFF Touch switch.

LED

FLEX STRIP SMD 2835



12 Vdc
10,5 ÷ 16,5 V




120°

lumen
700

IP 40

3000K
4000K
6500K



Art. 55L




Plafoniera con base piana.
Schermo in policarbonato opale, base in policarbonato bianco.
Disponibile con interruttore Touch ON/OFF.



*Surface-mounted light.
Diffuser made of satin polycarbonate, base made of white polycarbonate.
Available with ON/OFF Touch switch.*

LED FLEX STRIP SMD 2835

	12 Vdc 10,5 ÷ 16,5 V 24 Vdc 18,5 ÷ 33 V		120°	lumen 450	IP 40	3000K 4000K 6500K
--	--	--	------	--------------	-------	-------------------------



Art. 52R




Plafoniera con base piana.
Schermo in policarbonato opale, base in policarbonato bianco.
Disponibile con interruttore Touch ON/OFF.



*Surface-mounted light.
Diffuser made of satin polycarbonate, base made of white polycarbonate.
Available with ON/OFF Touch switch.*

LED FLEX STRIP SMD 2835

	12 Vdc 10,5 ÷ 16,5 V 24 Vdc 18,5 ÷ 33 V		120°	lumen 600	IP 40	3000K 4000K 6500K
--	--	--	------	--------------	-------	-------------------------



Art. 53R




Plafoniera con base piana.
Schermo in policarbonato opale, base in policarbonato bianco.
Disponibile con interruttore Touch ON/OFF.



*Surface-mounted light.
Diffuser made of satin polycarbonate, base made of white polycarbonate.
Available with ON/OFF Touch switch.*

LED FLEX STRIP SMD 2835

	12 Vdc 10,5 ÷ 16,5 V 24 Vdc 18,5 ÷ 33 V		120°	lumen 400	IP 40	3000K 4000K 6500K
--	--	--	------	--------------	-------	-------------------------



Art. 52R MIRROR



Plafoniera con base piana.
Schermo in policarbonato opale, base in policarbonato bianco.
Disponibile con interruttore Touch ON/OFF.



*Surface-mounted light.
Diffuser made of satin polycarbonate, base made of white polycarbonate.
Available with ON/OFF Touch switch.*

LED FLEX STRIP SMD 2835

	12 Vdc 10,5 ÷ 16,5 V 24 Vdc 18,5 ÷ 33 V		120°	lumen 600	IP 40	3000K 4000K 6500K
--	--	--	------	--------------	-------	-------------------------



Art. 55S MIRROR




Plafoniera con base piana.
Schermo in policarbonato opale, base in policarbonato bianco.
Disponibile con interruttore Touch ON/OFF.



*Surface-mounted light.
Diffuser made of satin polycarbonate, base made of white polycarbonate.
Available with ON/OFF Touch switch.*

LED FLEX STRIP SMD 2835

	12 Vdc 10,5 ÷ 16,5 V 24 Vdc 18,5 ÷ 33 V		120°	lumen 700	IP 40	3000K 4000K 6500K
--	--	--	------	--------------	-------	-------------------------




light in motion

Art. 59

Serie di plafoniere con schermi a specchio personalizzabili su richiesta sia nella forma che nella grafica.
Dotate di illuminazione LED principale e di cortesia.

*Series of ceiling lights with mirror diffuser customizable on request both in shape and in graphics.
Supplied with LED main and courtesy lighting.*

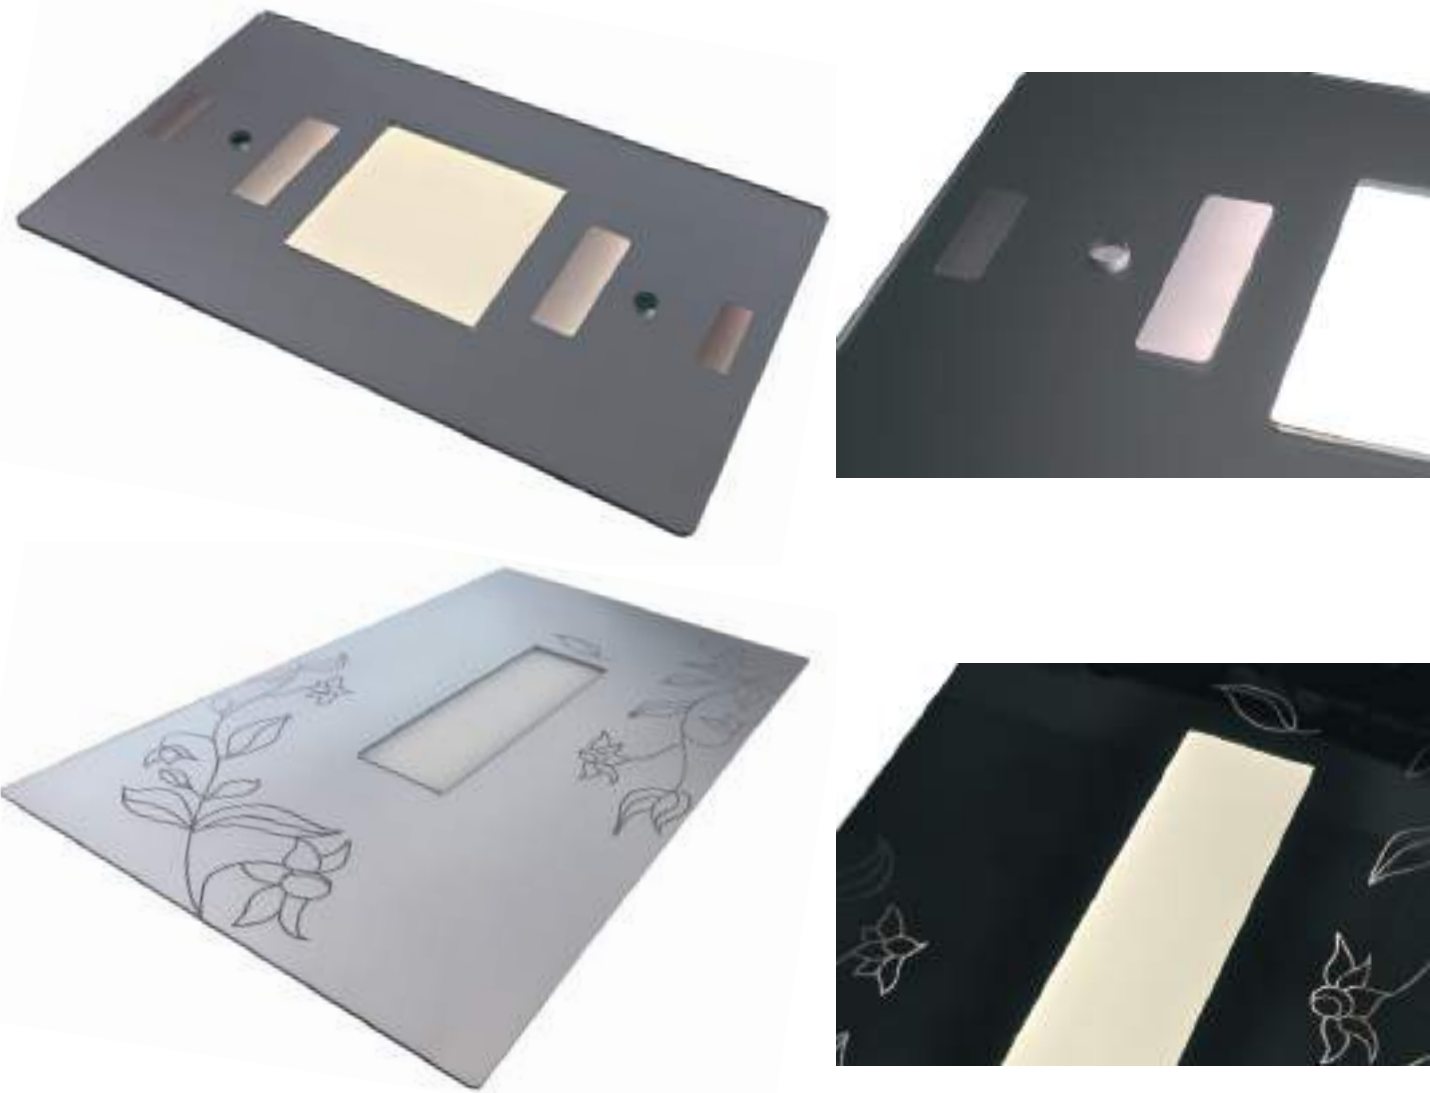

light in motion


Art. GUCCIO

Plafoniera con base piana con effetto di luce diffusa.
Schermo in metacrilato trasparente, base in metacrilato bianco.
Cornice disponibile in diverse soluzioni di finitura (rivestita con tessuto standard o personalizzato, o verniciata Silver).
Disponibile con accensione Touch ON/OFF.



*Surface-mounted lamp, diffuser light effect without visible LEDs points.
Diffuser made of satin clear methacrylate, base made of white methacrylate.
Frame available in several finishings (upholstered with standard or customized fabrics, or Silver painted).
Available with ON/OFF Touch switch.*

LED




Art. BOOMERANG

Plafoniera con base piana.
Effetto di luce diffusa. Schermo in metacrilato trasparente, base in metacrilato bianco.
Con accensione Touch ON/OFF.



*Surface-mounted lamp.
Diffuser light effect without visible LEDs points. Diffuser made of satin clear methacrylate, base made of white methacrylate.
With ON/OFF Touch switch.*

LED




Art. 160

Cornice oblò con base piana.
Base in ABS silver, schermi in policarbonato trasparente, vetri di protezione faretto satinati.
Completa di interruttori. Optional 2 altoparlanti.

*Surface-mounted rooflight-frame.
Base made of silver ABS, diffusers made of clear polycarbonate, spot's diffusers made of satin glass.
Switched. Optional 2 loudspeakers.*



LED 2xLL18 + 4xLV43



Art. 104 FLAT

Plafoniera indicata per l'illuminazione principale di veicoli isothermici, grazie al grado di protezione IP54.
Base piana in alluminio bianco, schermo in policarbonato resistente agli urti.
Disponibile con accensione Touch ON/OFF.

Surface-mounted lamp specifically developed for the Cooling-Truck trailers thanks to its watertight protection IP54.
Base made of white aluminum, diffuser made of impact-resistant polycarbonate.
Available with ON/OFF Touch switch.

LED LV33 - 24 LEDs

	12 Vdc 10,5 ÷ 16,5 V		120°	lumen	1000	IP 54	3000K 4000K 6500K
--	-------------------------	--	------	-------	------	-------	-------------------------

Art. 104 IP

Plafoniera indicata per l'illuminazione principale di veicoli isothermici, grazie al grado di protezione IP65.
Base ad incasso in policarbonato bianco, schermo in policarbonato resistente agli urti, guaina in forprene.

Recess-mounted lamp specifically developed for the Cooling-Truck trailers thanks to its watertight protection IP65.
Base made of white polycarbonate, diffuser made of impact-resistant polycarbonate, rubber made of forprene.

LED LV33 - 24 LEDs

	12 Vdc 10,5 ÷ 16,5 V		120°	lumen	1000	IP 65	3000K 4000K 6500K
--	-------------------------	--	------	-------	------	-------	-------------------------



Art. 107 FLAT

Plafoniera con base piana.
Base in alluminio bianco, schermo in policarbonato opale satinato.
Disponibile con accensione Touch ON/OFF.

Surface-mounted lamp.
Base made of white aluminum, diffuser made of opal satin polycarbonate.
Available with ON/OFF Touch switch.

LED LV24 - 12 LEDs

	12 Vdc 10,5 ÷ 16,5 V		120°	lumen	500	IP 40	3000K 4000K 6500K
--	-------------------------	--	------	-------	-----	-------	-------------------------



Art. 81

Plafoniera con base piana, particolarmente indicata per veicoli isothermici grazie al grado di protezione IP65 (con diffusore) o IP67 (con maschera riflettente).
Struttura realizzata in pressofusione di alluminio (nei colori alluminio naturale e bianco - altri colori su richiesta), completa di diffusore in policarbonato resistente agli urti oppure maschera riflettente in policarbonato bianco.
Disponibile in tecnologia Power Led per garantire elevate prestazioni di illuminazione e durata di impiego, offrendo un immediato rendimento all'accensione anche a temperature molto basse (fino a -40°C).
Disponibile con sensore di movimento.
Disponibile con accensione Touch ON/OFF.

Surface-mounted lamp specifically developed for the Cooling-Truck trailers thanks to its watertight protection IP65 (with diffuser) or IP67 (with reflector mask).
The structure is made of die-cast aluminum (available colors natural aluminium or white - other colors on demand) and impact-resistant polycarbonate diffuser or white reflector mask.
It is available in Power Led technology that guarantees high lighting performances and long life, and it provides an immediate full lighting power even at very low temperature (up to -40°C).
Available with integrated PIR sensor.
Available with ON/OFF Touch switch.

POWER LED LV12 - 4 POWER LEDs

	12/24V DC 10,5 ÷ 33 V		120°	lumen	560	IP 65	IP 67	3950K 6000K
--	--------------------------	--	------	-------	-----	-------	-------	----------------

POWER LED LV12 - 6 POWER LEDs

	12/24V DC 10,5 ÷ 33 V		120°	lumen	840	IP 65	IP 67	3950K 6000K
--	--------------------------	--	------	-------	-----	-------	-------	----------------

LED LV24 - 12 LEDs

	12 Vdc 10,5 ÷ 16,5 V		120°	lumen	500	IP 65	IP 67	3000K 4000K 6500K
--	-------------------------	--	------	-------	-----	-------	-------	-------------------------

LED LV42

	12/24V DC 10,5 ÷ 33 V		120°	lumen	700	IP 65		3000K 4000K 6500K
--	--------------------------	--	------	-------	-----	-------	--	-------------------------




Art. SDM

Rilevatore di presenza applicabile a qualsiasi modulo/strip LED o incorporato ad alcuni articoli di plafoniera.
È in grado di captare ogni movimento all'interno del raggio d'azione e attivare l'accensione del corpo illuminante.
Tempo di accensione standard 3 min. (altre varianti disponibili su richiesta).

Presence detector applicable to any LED modules/strips or embedded in some lamps.
It is able to detect any movement within the range of action and automatically activate the switch on of the luminaire.
Time setting ON 3 min. (different default time settings are possible on demand).

	12/24V DC 10,5 ÷ 33 V		60°	IP 65
--	--------------------------	--	-----	-------



Art. 78 IP




Plafoniera ad incasso indicata per l'illuminazione principale di veicoli isotermici, grazie al grado di protezione IP65. Base in policarbonato bianco, schermo in policarbonato resistente agli urti, guaina in forprene.



Recess-mounted lamp specially developed for the Cooling-Truck trailers thanks to its watertight protection IP65. Base made of white polycarbonate and diffuser made of impact-resistant polycarbonate, rubber made of forprene.

LED		LV24 - 12 LEDs				
	12/24V DC 10,5 + 33 V		lumen 560	IP 65	3950K 6000K	



Art. 78 FLAT




Plafoniera a base piana indicata per l'illuminazione principale di veicoli isotermici, grazie al grado di protezione IP54. Base in alluminio bianco, schermo in policarbonato resistente agli urti, guaina in forprene.



Surface-mounted lamp specially developed for the Cooling-Truck trailers thanks to its watertight protection IP54. Base made of white aluminum and diffuser made of impact-resistant polycarbonate, rubber made of forprene.

LED		LV24 - 12 LEDs				
	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V		lumen 500	IP 54	3000K 4000K 6500K	

LED		2 x LV42 - 24 LEDs				
	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V		lumen 1400	IP 40	3000K 4000K 6500K	



light in motion

Art. 170



Plafoniera con base piana adatta per l'illuminazione sopraporta con funzione di sgocciolatoio. Schermo in policarbonato opale, base in ABS bianco o silver. Materiali protetti contro raggi UV.

Surface-mounted lamp suitable for outdoor above the door with draining function. Diffusers made of opal polycarbonate, base made of white or silver ABS. All components are protected against UV rays.

LED		LL14	
	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V	 120°	 500
	IP 44	 3000K 4000K 6500K	



Art. 173



Plafoniera con base piana adatta per l'illuminazione sopraporta con funzione di sgocciolatoio. Schermo in policarbonato opale, base in ABS bianco o silver, guaina in EPDM bianca. Materiali protetti contro raggi UV.

Surface-mounted lamp suitable for outdoor above the door with draining function. Diffusers made of opal polycarbonate, base made of white or silver ABS, gasket made of white EPDM. All components are protected against UV rays.

LED		FLEX STRIP	
	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V	 120°	 1000
	IP 54	 3000K 4000K 6500K	




Art. 174



Plafoniera con base piana adatta per l'illuminazione esterna della zona veranda o sopraporta con funzione anche di sgocciolatoio. Base e maschera in ABS bianco o grigio protetto contro i raggi UV.

Surface-mounted lamp suitable for outdoor lighting of the awning area or above the door also with draining function. Base and front mask made of white or grey ABS protected against UV rays.

LED		LL14	
	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V	 90°	 350
	IP 67	 3000K 4000K 6500K	



Art. 175M



Plafoniera con base piana adatta per l'illuminazione esterna della zona veranda o sopraporta con funzione anche di sgocciolatoio. Base in alluminio anodizzato naturale, testate in ABS grigio. Schermo in policarbonato opale. Materiali protetti contro i raggi UV.

Surface-mounted lamp suitable for outdoor lighting of the awning area or above the door also with draining function. Base made of anodized aluminum, end caps made of grey ABS. Front mask made of grey polycarbonate. All materials are protected against UV rays.

LED		LL14 (L=465 mm)	
	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V	 90°	 500
	IP 67	 6500K	

LED		LL18 (L=265 mm)	
	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V	 90°	 250
	IP 67	 6500K	

LED		LL45 (L=465 mm)	
	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V	 90°	 1000
	IP 67	 6500K	

LED		LL30 (L=265 mm)	
	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V	 90°	 500
	IP 67	 6500K	



Art. 175S



Plafoniera con base piana adatta per l'illuminazione esterna della zona veranda o sopraporta con funzione anche di sgocciolatoio. Estrusione di alluminio e policarbonato permette di realizzare lunghezze personalizzate. Base in alluminio anodizzato naturale, testate in ABS grigio. Schermo in policarbonato opale. Materiali protetti contro i raggi UV.

Surface-mounted lamp suitable for outdoor lighting of the awning area or above the door also with draining function. The extruded aluminum and polycarbonate body allows us to make customized lengths. Base made of anodized aluminum, end caps made of grey ABS. Front mask made of grey polycarbonate. All materials are protected against UV rays.

LED		LL8 (L=555 mm)	
	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V	 120°	 500
	IP 65	 6500K	


LED		LL21 (L= 320 mm)	
	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V	 120°	 250
	IP 65	 6500K	

LED		LL45 (465 mm)	
	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V	 120°	 1000
	IP 65	 6500K	

LED		LL30 (265 mm)	
	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V	 120°	 500
	IP 65	 6500K	

LED		FLEX STRIP (1470 mm)	
	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V	 120°	 120 LEDs/m 240 LEDs/m lumen 1400
	IP 65	 3000K 4000K 6500K	

LED		FLEX STRIP (555 mm)	
	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V	 120°	 120 LEDs/m 240 LEDs/m lumen 600
	IP 65	 3000K 4000K 6500K	




Art. 176



Plafoniera a base piana adatta per l'illuminazione esterna della zona veranda o sopraporta con funzione anche di sgocciolatoio.  E' realizzata in co-estruso di policarbonato (alta resistenza meccanica) ed un materiale ad alta dissipazione termica, protetto UV. La strip LED è protetta mediante resinatura per garantire l'utilizzo all'esterno o in ambienti gravosi. Il particolare design permette il fissaggio a vite con profilo di copertura. Può essere realizzata in lunghezze personalizzabili fino a 7 metri.

Surface-mounted lamp with draining function, suitable for outdoor lighting thanks to IP65 protection rating. It is suitable for installation above doors and as a wall light. It is made of co-extruded polycarbonate (high mechanical strength) and an high thermal dissipation material, UV protected material. The LED strip inside the lamp, is protected by resin coating to guarantee outdoor and/or harsh environments usage. The particular design allows fixing method by screws with a covering profile. Customized lengths are available up to 7 meters.

LED FLEX STRIP	
	12 Vdc 10,5 + 16,5 V 24 Vdc 16,5 + 33 V
	120°
	120 LEDs/m
	240 LEDs/m
	lumen/m 1000
	IP 40 IP 67
	3000K 4000K 6500K




Art. SLIM



Plafoniera a base piana indicata per l'illuminazione principale di veicoli isotermici o in ambienti gravosi, grazie al grado di protezione IP65.  E' realizzata in policarbonato trasparente estruso e completa di testate in ABS. Può essere realizzata in lunghezze personalizzabili.

Surface-mounted lamp specially developed for the Cooling-Truck trailers and suitable for harsh environments, thanks to its IP65 protection rating. It is made of extruded clear polycarbonate and completed with ABS end caps. Customized lengths are available.

LED LL53	
	12/24V DC 10,5 + 33 V
	120°
	lumen 760
	IP 65
	3000K 4000K 6500K




Art. 301



Plafoniera con base piana.
Schermo in policarbonato trasparente o opale, base in alluminio anodizzato naturale, testate in ABS grigio.
La struttura in estrusione di policarbonato permette di realizzare lunghezze personalizzate. Disponibile con o senza interruttore. Disponibile con Led blu notturni.

Surface-mounted lamp.
Diffuser made of clear or opal polycarbonate, base made of anodized aluminum, end caps made of grey ABS. The extruded polycarbonate body allows us to make customized lengths. Available with or without switch. Available with Blue night Leds.



LED LL8 (L=570 mm)

III	12 Vdc 10,5 + 16,5 V	lumen 500	IP 40	3000K 4000K 6500K
III	24 Vdc 18,5 + 33 V			

LED LL21 (L= 338 mm)

III	12 Vdc 10,5 + 16,5 V	lumen 250	IP 40	3000K 4000K 6500K
III	24 Vdc 18,5 + 33 V			

LED LL26 (L=570 mm)

III	12 Vdc 10,5 + 16,5 V	lumen 850	IP 40	3000K 4000K 6500K
III	24 Vdc 18,5 + 33 V			


LED FLEX STRIP - L = ON REQUEST

III	12Vdc 10,5+16,5 V	120 LEDs/m	IP 40	3000K 4000K 6500K
-----	----------------------	---------------	-------	-------------------------

Art. 303/303A



Plafoniera ad incasso.
Schermo in policarbonato trasparente o opale, base in alluminio anodizzato naturale, testate in ABS grigio.
La struttura in estrusione di policarbonato permette di realizzare lunghezze personalizzate. È disponibile anche la versione con lente focalizzante per illuminazione porte autobus, e la versione con Led blu notturni. Disponibile con o senza interruttore Touch ON/OFF.



Recess-mounted lamp.
Diffuser made of clear or opal polycarbonate, base made of anodized aluminum, end caps made of grey ABS. The extruded polycarbonate body allow us to make customized lengths. It is also available with focus lens for bus doors lighting and the version with Blue night Leds. Available with or without ON/OFF Touch switch.

LED LL8 (L=573 mm)

III	12 Vdc 10,5 + 16,5 V	lumen 500	IP 40	3000K 4000K 6500K
III	24 Vdc 18,5 + 33 V			

LED LL21 (L=338 mm)

III	12 Vdc 10,5 + 16,5 V	lumen 250	IP 40	3000K 4000K 6500K
III	24 Vdc 18,5 + 33 V			

LED FLEX STRIP


III	12Vdc 10,5+16,5 V	120 LEDs/m	IP 40	3000K 4000K 6500K
-----	----------------------	---------------	-------	-------------------------

Art. 306



Plafoniera con base piana.
Schermo in policarbonato trasparente satinato, base in alluminio anodizzato naturale, testate in ABS cromo lucido.
La struttura in estrusione di policarbonato permette di realizzare lunghezze personalizzate. Disponibile con o senza interruttore.

Surface-mounted lamp.
Diffuser made of satin clear polycarbonate, base made of anodized aluminum, end caps made of glossy chrome ABS. The extruded polycarbonate body allows us to make customized lengths. Available with or without switch.



LED FLEX STRIP


III	12Vdc 10,5+16,5 V	120 LEDs/m	IP 40	3000K 4000K 6500K
-----	----------------------	---------------	-------	-------------------------

Art. 304



Plafoniera con base piana.
Schermo in policarbonato trasparente satinato, base in alluminio anodizzato naturale, testate in ABS grigio.
La struttura in estrusione di policarbonato permette di realizzare lunghezze personalizzate. Disponibile con o senza interruttore.

Surface-mounted lamp.
Diffuser made of satin clear polycarbonate, base made of anodized aluminum, end caps made of grey ABS. The extruded polycarbonate body allows us to make customized lengths. Available with or without switch.



LED LL8 (L=570 mm)

III	12 Vdc 10,5 + 16,5 V	lumen 500	IP 40	3000K 4000K 6500K
III	24 Vdc 18,5 + 33 V			

LED LL21 (335 mm)

III	12 Vdc 10,5 + 16,5 V	lumen 250	IP 40	3000K 4000K 6500K
III	24 Vdc 18,5 + 33 V			

LED FLEX STRIP


III	12Vdc 10,5+16,5 V	120 LEDs/m	IP 40	3000K 4000K 6500K
-----	----------------------	---------------	-------	-------------------------

Art. 308



Plafoniera con base piana.
Schermo in policarbonato trasparente satinato, base in alluminio anodizzato naturale, testate in ABS cromo lucido.
La struttura in estrusione di policarbonato permette di realizzare lunghezze personalizzate. Disponibile con o senza interruttore.

Surface-mounted lamp.
Diffuser made of satin clear polycarbonate, base made of anodized aluminum, end caps made of glossy chrome ABS. The extruded polycarbonate body allows us to make customized lengths. Available with or without switch.



LED FLEX STRIP

III	12Vdc 10,5+16,5 V	120 LEDs/m	IP 40	3000K 4000K 6500K
-----	----------------------	---------------	-------	-------------------------

Art. GARAGE LAMP



Plafoniera con supporti di fissaggio adatta per l'illuminazione interna bagagliaio.
Schermo in policarbonato trasparente, base in alluminio anodizzato, testate in ABS grigio, completa di cavo spiralato e interruttore.

Lamp suitable for the interior of boot compartment.
Diffuser made of clear polycarbonate, base made of anodized aluminum, end caps made of grey ABS. Supplied with spiral cable and switch.



LED FLEX STRIP 120 LEDs/m

III	12 Vdc 10,5 + 16,5 V	100°	lumen 210	IP 40	3000K 4000K 6500K
III	24 Vdc 18,5 + 33 V				

Art. 30L




Plafoniera con base piana.
Realizzata in policarbonato trasparente IP65, è adatta per l'illuminazione di gradini e corridoio.
Disponibile con luce di cortesia 3Leds rossi o blu.



Surface-mounted lamp.
Made of clear polycarbonate IP65, it's suitable for steps, aisle and marker lighting.
Available with optional 3 red or blue Leds for courtesy lighting.

LED		LL31	
	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V	 120°	 lumen 100
	IP 65	 3000K 4000K 6500K	

LED		LL31	
	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V	 120°	 lumen 400
	IP 65	 3000K 4000K 6500K	



Art. FLAT IP




Plafoniera con base piana, protetta IP65.
Struttura in metacrilato trasparente.
Completa di adesivo in materiale isolante sul retro.



Surface-mounted lamp, waterproof IP65.
Body made of clear methacrylate.
Supplied with rear sealing adhesive.

LED		LL21 (FLAT 2)	
	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V	 120°	 lumen 250
	IP 65	 3000K 4000K 6500K	

LED		LL8 (FLAT 5)	
	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V	 120°	 lumen 500
	IP 65	 3000K 4000K 6500K	




Art. FLAT



Plafoniera con base piana.
Schermo in policarbonato trasparente satinato, testate in ABS grigio. La struttura in estrusione di policarbonato permette di realizzare lunghezze personalizzate.
Disponibile con o senza interruttore.

Surface-mounted lamp.
Diffuser made of satin clear polycarbonate, end caps made of gray ABS. The extruded polycarbonate body allows us to make customized lengths.
Available with or without switch.

LED		FLEX STRIP - L = ON REQUEST	
	12Vdc 10,5+16,5 V	 120	 LEDs/m
	IP 40	 3000K 4000K 6500K	



Art. 139




Estruso in alluminio anodizzato e policarbonato, testate in ABS grigio.
La struttura in estrusione di policarbonato permette di realizzare lunghezze personalizzate.
Disponibile con o senza interruttore.
Disponibile con Led blu notturni.

Extrusion made of anodized aluminum and polycarbonate, ABS grey end caps.
The extruded polycarbonate body allows us to make customized lengths.
Available with or without switch. Available with Blue night Leds.

LED		LL8 (L=570 mm)	
	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V	 lumen 500	 IP 40
	3000K 4000K 6500K		

LED		LL21 (L= 335 mm)	
	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V	 lumen 250	 IP 40
	3000K 4000K 6500K		



Art. 144




Estruso in alluminio anodizzato e policarbonato, testate in ABS grigio.
La struttura in estrusione di policarbonato permette di realizzare lunghezze personalizzate.
Disponibile con o senza interruttore.
Disponibile con Led blu notturni.

Extrusion made of anodized aluminum and polycarbonate, ABS grey end caps.
The extruded polycarbonate body allows us to make customized lengths.
Available with or without switch.
Available with Blue night Leds.

LED		LL8 (L=540 mm)	
	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V	 lumen 500	 IP 40
	3000K 4000K 6500K		

LED		LL21 (L= 335 mm)	
	12 Vdc 10,5 + 16,5 V 24 Vdc 18,5 + 33 V	 lumen 250	 IP 40
	3000K 4000K 6500K		




Art. 110



Estruso ad incasso in alluminio verniciato bianco e policarbonato, testate in ABS bianco.
La struttura in estrusione di policarbonato permette di realizzare lunghezze personalizzate.
Disponibile con Led blu notturni.

Extrusion made of white painted aluminum and polycarbonate, ABS white end caps.
The extruded polycarbonate body allows us to make customized lengths.
Available with Blue night Leds.

LED		LL44 (L=910 mm)	
	12Vdc 10,5+16,5 V	 lumen 1700	 IP 40
	3000K 4000K 6500K		






Art. 146

Estruso in alluminio verniciato bianco e policarbonato, testate in ABS bianco.
La struttura in estrusione di policarbonato permette di realizzare lunghezze personalizzate.
Disponibile con o senza interruttore.
Disponibile con Led blu notturni.

*Extrusion made of white painted aluminum and polycarbonate, ABS white end caps.
The extruded polycarbonate body allows us to make customized lengths.
Available with or without switch.
Available with Blue night Leds.*

SOLUZIONI PERSONALIZZATE/CUSTOMIZED SOLUTIONS




Art. 136

Estruso in alluminio verniciato bianco e policarbonato, testate in ABS bianco.
La struttura in estrusione di policarbonato permette di realizzare lunghezze personalizzate.
Disponibile con o senza interruttore.

*Extrusion made of white painted aluminum and polycarbonate, ABS white end caps.
The extruded polycarbonate body allows us to make customized lengths.
Available with or without switch.*

SOLUZIONI PERSONALIZZATE/CUSTOMIZED SOLUTIONS




Art. 137

Estruso in alluminio verniciato bianco e policarbonato, testate in ABS bianco.
La struttura in estrusione di policarbonato permette di realizzare lunghezze personalizzate.
Disponibile con o senza interruttore.

*Extrusion made of white painted aluminum and polycarbonate, ABS white end caps.
The extruded polycarbonate body allows us to make customized lengths.
Available with or without switch.*

SOLUZIONI PERSONALIZZATE/CUSTOMIZED SOLUTIONS




Art. 138

Estruso in alluminio anodizzato e policarbonato, testate in ABS grigio.
La struttura in estrusione di policarbonato permette di realizzare lunghezze personalizzate.
Disponibile con o senza interruttore.

*Extrusion made of anodized aluminum and polycarbonate, ABS grey end caps.
The extruded polycarbonate body allows us to make customized lengths.
Available with or without switch.*

SOLUZIONI PERSONALIZZATE/CUSTOMIZED SOLUTIONS




Art. 103

Estruso ad incasso in alluminio verniciato bianco e policarbonato, testate in ABS bianco.
La struttura in estrusione di policarbonato permette di realizzare lunghezze personalizzate.
Disponibile con o senza interruttore.

*Extrusion made of white painted aluminum and polycarbonate, ABS white end caps.
The extruded polycarbonate body allows us to make customized lengths.
Available with or without switch.*

SOLUZIONI PERSONALIZZATE/CUSTOMIZED SOLUTIONS




Art. 300

Profilo per gradini con base in alluminio anodizzato naturale.
Schermo di protezione in policarbonato opale.
Completo di gomma antiscivolo gialla.
Disponibile con e senza illuminazione Led.

*Step lighting profile made of anodized aluminum.
Diffuser made of opal polycarbonate.
Supplied with non-slippery yellow PVC.
Available with or without Led lighting.*

SOLUZIONI PERSONALIZZATE/CUSTOMIZED SOLUTIONS



Art. GS



L' Art. Flexible Led Strip MOD. GS è adatto sia per illuminazioni di interni (versione no IP) che di esterni (versione IP65).
Si presta a svariate applicazioni di general lighting quali illuminazione decorativa, retro illuminazione di espositori o insegne, effetti scenografici, ecc... in diverse tonalità di colore.
Il fissaggio avviene mediante autoadesivo per un'installazione semplice e veloce.

*The series Flexible Led Strip GS is suitable both for interior (no IP version) and for exterior lighting (IP65 version).
It can be installed for light decoration, panels or displays, marking paths, etc... in several lighting colours.
The fixing can be made by adhesive tape for an easy installation.*

LED	3528 - 30 LEDs/m
LED	3528 - 60 LEDs/m
LED	3528 - 120 LEDs/m
LED	2835 - 120 LEDs/m

LED	5050 - 60 LEDs/m
LED	Side Emitter - 60 LEDs/m
LED	RGB - 30 LEDs/m
LED	RGB - 60 LEDs/m

Art. FT



L' Art. Flexible Led Strip MOD. FT è progettata specificatamente per il settore Automotive, con protezione fusibile incorporato nel circuito elettronico, range di tensione 10.5÷16.5 Vdc e con protezione contro l'inversione di polarità.
Viene fornito sia in versione no IP, adatto per illuminazione interna, che in versione IP65 per illuminazione esterna.
Si presta a svariate applicazioni d'uso quali illuminazione decorativa, retro illuminazione, ecc... ed è disponibile in diverse tonalità di colore.
Il fissaggio avviene mediante biadesivo per un'installazione semplice e veloce.

*The Series Art. FT Flexible Led Strip is specifically designed for the Automotive sector, with fuse protection incorporated in the electronic circuit, 10.5 ÷ 16.5 Vdc voltage range and with polarity reverse protection.
It is supplied both in the no-IP version, suitable for indoor lighting, and in the IP65 version for outdoor lighting.
It is suitable for a variety of applications such as decorative lighting, back lighting, etc... and it is available in different lighting colors.
The fixing can be made by adhesive tape for an easy installation.*

LED	2835 - 30 Led/m
LED	2835 - 60 LEDs/m

LED	2835 - 120 LEDs/m



Art. LINE



Strip flessibile con emissione laterale omogenea e priva di punti Led.
Offre un'illuminazione ambiente confortevole ed è adatta per creare linee decorative di design, senza necessità di applicare ulteriori schermi di protezione.

*Flexible Strip for homogenous and dot-free lighting.
It offers a comfortable ambient lighting, ideal to create individual design.*

LED	2835 - 168 LEDs/m - 4x10 mm
LED	2835 - 120 LEDs/m - 6x12 mm

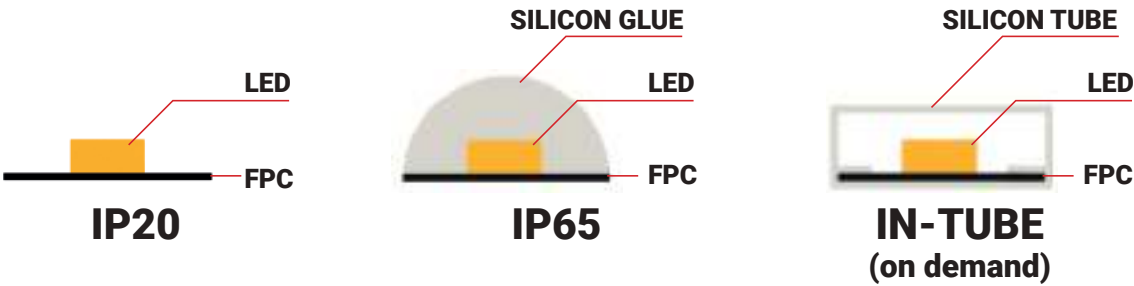


light in motion



Grazie alla propria Divisione "Engineering", qualificata e di grande esperienza nel settore dell'illuminazione LED per veicoli, Ofolux progetta e produce i moduli e le strip LED installati negli articoli di propria produzione. Tutti i prodotti sono conformi alle vigenti normative di Sicurezza del settore Automotive e omologati secondo il Regolamento UN-ECE R10 per la Compatibilità elettromagnetica (EMC), ulteriore garanzia di qualità e affidabilità. Esperienza e tecnologia di progettazione e produzione permettono ad Ofolux di offrire anche soluzioni personalizzate per meglio soddisfare le più svariate esigenze.

Thanks to its in-house "Engineering" Staff, Ofolux designs and manufactures LED modules and strips installed in the articles of its own production, in accordance with Automotive Safety Standards and type-approved according to Regulation UN-ECE R10 for electromagnetic compatibility (EMC), to ensure quality and reliability. Long experience and sophisticated design and production technology allows Ofolux to offer customized solutions to better meet the various needs.

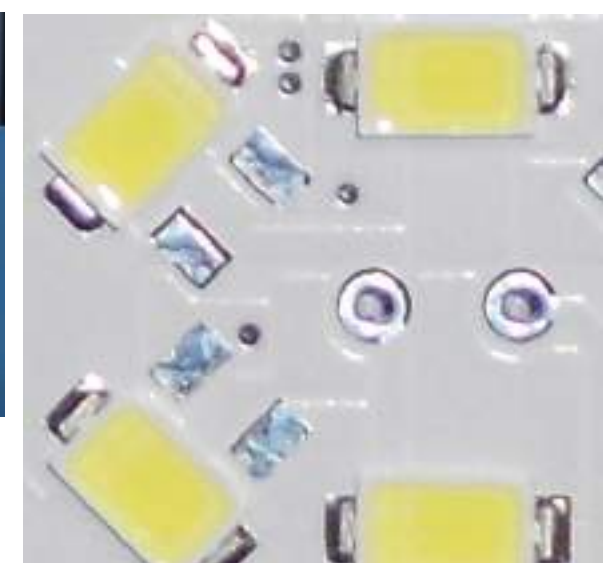

SISTEMI ILLUMINAZIONE AUTOBUS LIGHTING SYSTEMS FOR BUS



LUGGAGE RACKS FOR LUXURY COACH

Grazie alle sue Divisioni Engineering (Meccanica / Elettronica), OFOLux è in grado di sviluppare sistemi di interiors completi (da finestra a finestra) sulla base delle specifiche del cliente.

Il know-how e la tecnologia di produzione, in costante aggiornamento, rendono OFOLux flessibile e pronta nel rispondere ad ogni esigenza.

Sistemi di cappelliere/bagagliere, canali A/C e pannelli cielo pronti per l'installazione, con integrata illuminazione LED di ultima generazione.

Strutture realizzate in profili di alluminio di alta qualità, policarbonato antiurto, laminati e materiali compositi conformi alle vigenti normative UE per il settore trasporto su strada e passeggeri (R118).

Le finiture possono essere personalizzate su richiesta.



Thanks to the Engineering Divisions (Mechanical / Electronic), OFOLux is able to develop and produce complete interior systems (from window to window), according customers' specifications.

Its know-how and the production system at the forefront of technology, make OFOLux flexible and able to provide custom solutions fulfilling any specific request.

Luggage Rack systems, Air Duct systems and Ceiling panels, ready to install, including last generation LED lighting modules.

High-quality materials: premium aluminum alloy, impact-resistant polycarbonate, laminated and composite materials in accordance with the ECE approvals for road transportation.


Finishes and trims can be customized upon request.



Sistemi Illuminazione Autobus Lighting Systems for Bus



CITY BUS INTERIORS

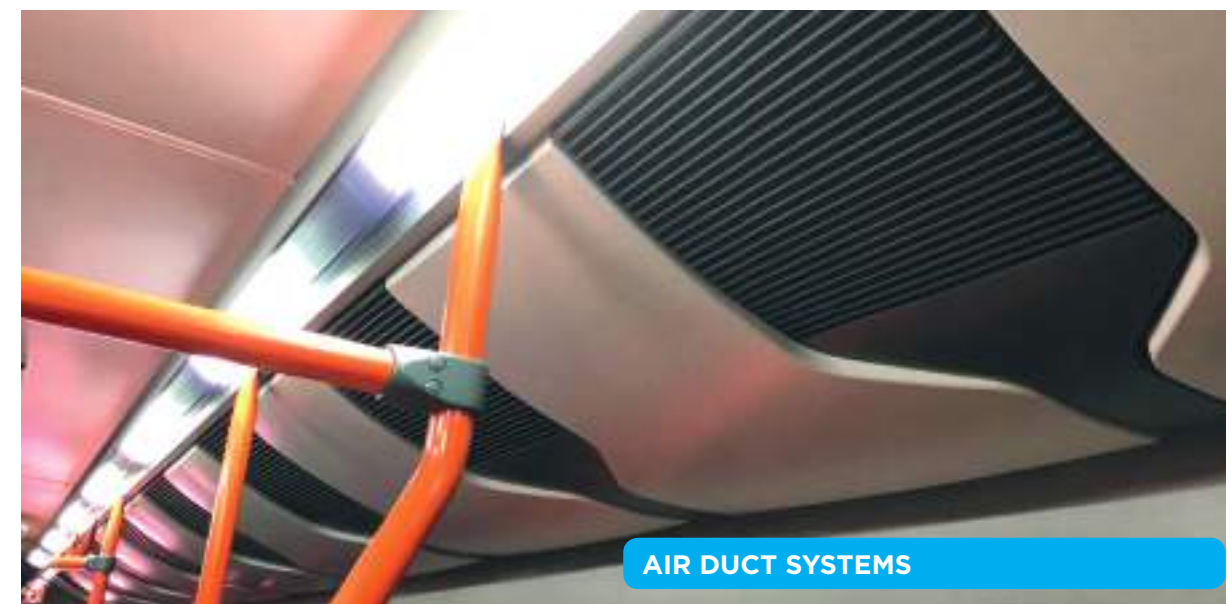

AIR DUCT SYSTEMS



LUGGAGE RACKS SUPPLIED WITH FLAPS



AIRPORT SHUTTLE



INTERCITY/COACH



LIGHTING PROFILES

MULTISET


Sistemi multifunzione, realizzati in ABS, facile fissaggio a vite.
Provisti di altoparlante, due bocchette d'aria, pulsantiera completa fino a 4 pulsanti tradizionali o touch, e due luci di lettura.
Gli appositi distanziali completano l'installazione in linea, che può essere di varie lunghezze.
Soluzioni personalizzate possono essere realizzate su richiesta.

*Multifunction Systems, made of ABS, ready to install by screws.
They are completed with 2 air-vents, 2 reading lights, up to 4 traditional buttons or touch switches for service-set, loudspeaker.
The in-line installation is also completed with matching spacer panels, which can be supplied in variable lengths.
Individual solutions can be developed on request.*



Technical data

- Voltage Range 18.5-33V
- Current 70mA@27.6V
- 2 Reading LED Lights 100 lx at 1m ø 60cm with Soft Start ON-OFF
- Up to 4 Buttons CapSense (Reading Lights, ON-OFF Audio, Hostess or Stop Requested)
- Backlighted Buttons, Red LED indicating Hostess call or Stop Requested
- Loudspeaker max adsorbed power 60W – Nominal impedance 4 ohm
- 2 connections Plug&Play INPUT-OUTPUT
- Service-Set control from Driver's Board

MULTISET mod. Diamond

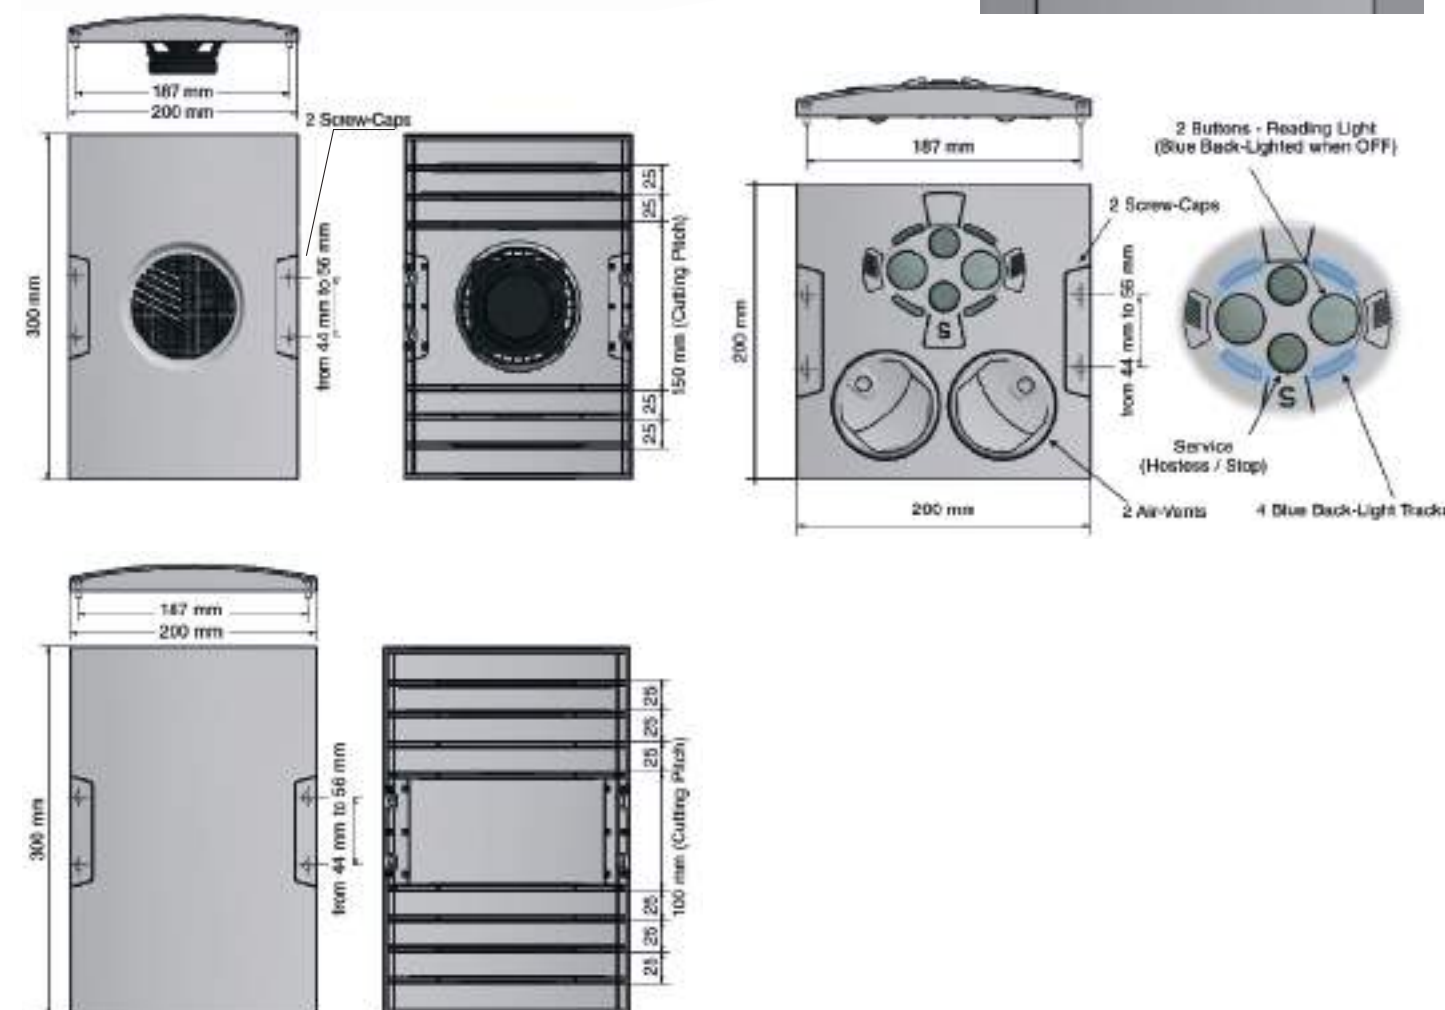

MULTISET mod. Infinity

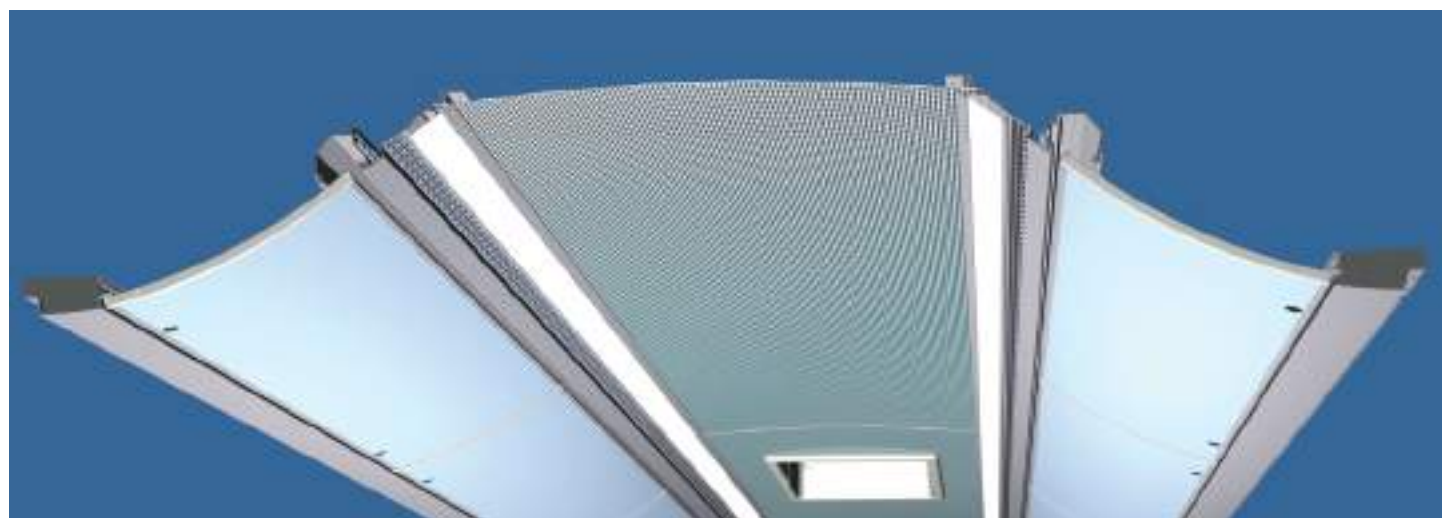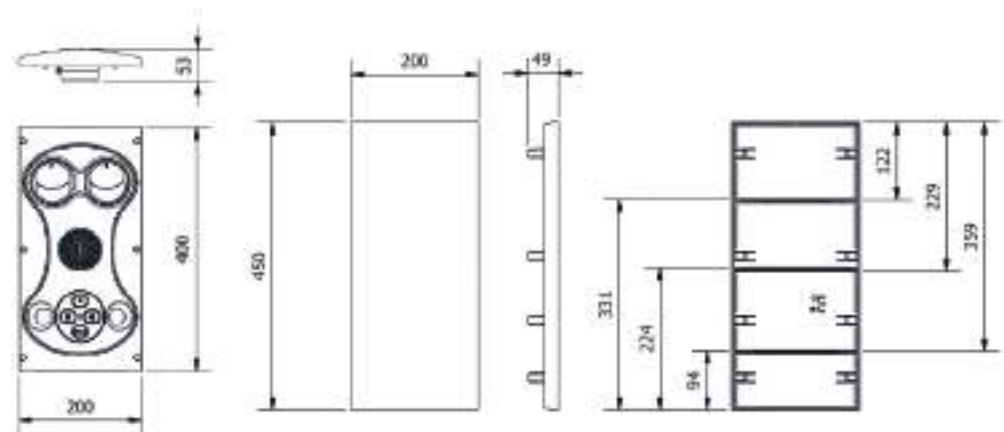


Accessori | Accessories

Art. 62/63



Martelletto frangicristallo.
Struttura in niplene autoestinguente, colore rosso.
Perno in acciaio temperato.
Disponibile con cavo antifurto (art. 63).

*Emergency hammer.
Body made of self-extinguishing red niplene.
Pin made of hardened steel.
Available with steel cable winding (art. 63).*



Art. 116



Cartello indicatore LED.
Struttura in alluminio anodizzato.
Schermo bifacciale in policarbonato.
Serigrafia personalizzabile.

*LED indicator for visual signaling.
Structure made of natural aluminum.
Double-sided display made of polycarbonate.
Text upon request*



Art. 71



Cartello incassato indicatore LED.
Struttura in alluminio verniciato.
Schermo in policarbonato.
Serigrafia personalizzabile.

*Recess-mounted LED indicator for visual signaling.
Structure made of varnished aluminum.
Display made of polycarbonate.
Text upon request.*



Art. 46



Suoneria monocolpo 12/24Vdc.
Base in policarbonato nero.
Campana in ottone cromato.

*Single sound bell 12/24Vdc.
Base made of black polycarbonate.
Bell made of chrome-plated brass.*






CONDIZIONI GENERALI DI VENDITA

- 1. GENERALITÀ**
L'accettazione da parte dell'Acquirente dell'offerta o la conferma dell'ordine da parte di OFOLUX S.r.l., in qualunque modo effettuate, comportano l'applicazione delle presenti Condizioni Generali di Vendita. Eventuali modifiche alle presenti clausole nonché eventuali condizioni generali d'acquisto redatte dall'Acquirente non troveranno applicazione nei rapporti fra le parti se non espressamente accettate per iscritto da OFOLUX S.r.l. ed in ogni caso non invalideranno l'efficacia delle presenti Condizioni Generali, con cui dovranno essere coordinate.
- 2. ORDINI**
Le ordinazioni acquisite dalla nostra organizzazione di vendita sono soggette all'approvazione di OFOLUX S.r.l.
- 3. TRASPORTO**
La merce viaggia a rischio e pericolo del committente il quale, nel proprio interesse, deve verificare, prima del ritiro, l'integrità dei colli e la quantità della merce ricevuta. Eventuali reclami dovranno essere avanzati direttamente al vettore al momento della consegna.
- 4. CONSEGNE**
La merce si intende resa franco nostro stabilimento di Brunello (VA).
I termini di consegna hanno carattere puramente indicativo e si computano a giorni lavorativi. Viene pertanto esclusa qualsiasi responsabilità di OFOLUX S.r.l. per tutti i danni derivanti da anticipata o ritardata consegna, totale o parziale.
Qualora l'Acquirente non sia in regola con i pagamenti relativi ad altre forniture, la decorrenza dei termini di consegna è sospesa e OFOLUX potrà ritardare le consegne fino a quando l'Acquirente non abbia corrisposto le somme dovute.
- 5. RITARDI GIUSTIFICABILI**
OFOLUX S.r.l. non sarà responsabile per il mancato puntuale rispetto dei suoi obblighi contrattuali nella misura in cui tale inadempimento derivi, direttamente o indirettamente, da:
 - cause a lei non imputabili e/o cause di forza maggiore;
 - azioni (od omissioni) dell'Acquirente ivi comprese la mancata trasmissione delle informazioni e delle approvazioni necessarie a OFOLUX per procedere con il proprio lavoro e la conseguente fornitura dei prodotti;
 - mancato rispetto dei termini di pagamento da parte dell'Acquirente;
 - impossibilità di ottenere i materiali, i componenti o i servizi necessari all'esecuzione del lavoro e alla fornitura dei prodotti.Nell'eventualità in cui si dovesse verificare una delle suddette ipotesi, OFOLUX S.r.l. provvederà a comunicarla all'Acquirente unitamente alla quantificazione del possibile ritardo e alla nuova data di consegna.
- 6. PREZZI**
Tutti i prezzi indicati sono da intendersi IVA ESCLUSA.
OFOLUX S.r.l. si riserva la facoltà di apportare variazioni ai prezzi nel caso di aumenti di costo delle materie prime, della mano d'opera o di qualsiasi altro fattore che determini un aumento rilevante dei costi di produzione. I prezzi dei prodotti s'intendono sempre Franco Fabbrica, fatti salvi diversi accordi scritti intercorsi tra le parti.
- 7. RESI E RECLAMI**
Eventuali contestazioni devono essere inviate per iscritto a OFOLUX S.r.l. entro 8 giorni dal ricevimento della merce.
La denuncia di eventuali difetti occulti e/o di funzionamento (rilevabili cioè solo a seguito dell'utilizzo del prodotto) dovrà essere effettuata entro 8 giorni dalla scoperta del difetto e comunque non oltre il periodo di garanzia.
La restituzione della merce deve essere preventivamente autorizzata da OFOLUX S.r.l.: non si accetta merce di ritorno senza preavviso e senza benessere. I resi autorizzati dovranno essere inviati ai magazzini OFOLUX in porto franco, corredati di regolare bolla d'accompagnamento e dei relativi estremi d'acquisto. Gli imballaggi devono essere integri e nelle stesse condizioni di fornitura.
- 8. GARANZIA**
OFOLux garantisce che tutti gli articoli prodotti nei suoi stabilimenti sono conformi alle specifiche tecniche dichiarate e sono idonei per le applicazioni previste.
Il periodo della garanzia è della durata di mesi 24 (ventiquattro) dalla avvenuta consegna al Cliente.
La garanzia prevede, a discrezione di OFOLUX: a) la riparazione dei prodotti difettosi; b) la sostituzione gratuita presso la sede dell'Acquirente dei prodotti dello stesso genere e quantità di quelli risultati difettosi; c) l'emissione della nota di credito in favore dell'Acquirente per una somma pari al valore indicato in fattura dei prodotti resi. In nessun caso OFOLux risponde di difetti provocati da danneggiamenti casuali, utilizzo improprio non conforme alle specifiche o per l'installazione avvenuta da personale non specializzato ed eventuali manomissioni o modifiche fatte agli articoli da persone non autorizzate dall'azienda. Se, durante l'intervento di OFOLUX, il difetto risulta non essere imputabile a responsabilità di OFOLUX, le spese ed i costi di riparazione o sostituzione dei prodotti difettosi sarà a carico dell'Acquirente.
Qualora la garanzia venga applicata, l'invio della merce riparata o sostituita sarà effettuato franco stabilimento del Cliente a carico di OFOLux.
La garanzia si applicherà direttamente all'Acquirente e non ai clienti, agenti o rappresentanti dell'Acquirente.
- 9. RISARCIMENTO DANNI**
La responsabilità di OFOLUX S.r.l., sia essa derivante dall'esecuzione o dalla mancata esecuzione del contratto, dalla garanzia o da responsabilità oggettiva, non potrà in ogni caso eccedere il valore del prodotto a cui tale responsabilità si ricollega. In nessun caso OFOLUX S.r.l. potrà essere responsabile per mancato guadagno o perdita di profitto, o per il mancato uso o fermo tecnico del prodotto o di qualsiasi macchinario associato, per reclami dell'Acquirente e/o di terzi relativi ai suddetti danni o per qualsiasi eventuale altro danno.
- 10. DATI TECNICI E RESPONSABILITÀ**
Le indicazioni di dimensioni, colori e altri dati relativi ai prodotti forniti ed indicati nei cataloghi o in altri documenti illustrativi redatti da OFOLUX S.r.l., così come le caratteristiche dei campioni, hanno carattere meramente indicativo e non hanno natura vincolante, tranne nelle ipotesi in cui gli stessi vengano indicati come tali nell'offerta di vendita o nella conferma d'ordine.
OFOLUX S.r.l. si riserva comunque il diritto di modificare in qualunque momento i particolari costruttivi dei propri prodotti al fine di migliorarne le prestazioni e rispettare le normative vigenti.
I prodotti OFOLUX S.r.l. sono conformi alla legislazione e alle norme tecniche vigenti in UE, conseguentemente l'Acquirente si assume la responsabilità di verificare ogni eventuale difformità esistente tra dette norme e quelle del paese di destinazione dei prodotti, tenendo indenne OFOLUX S.r.l.
OFOLUX garantisce le prestazioni dei prodotti di sua fabbricazione solo ed esclusivamente in relazione ad usi, destinazioni, applicazioni, tolleranze, ecc. da essa espressamente indicati.
- 11. PAGAMENTI**
I pagamenti devono essere effettuati a OFOLUX S.r.l. alla scadenza stabilita e per l'importo pattuito.
Il ritardo del pagamento delle fatture oltre i termini concordati dà luogo all'immediata decorrenza degli interessi bancari nella misura del tasso previsto dalle norme di legge attualmente in vigore per le transazioni commerciali e attribuisce a OFOLUX S.r.l. il diritto di:
 - sospendere le forniture in corso, anche se non relative al pagamento in questione;
 - variare le modalità di pagamento e di sconto per le forniture successive, anche richiedendo il pagamento anticipato o l'emissione di ulteriori garanzie;Inoltre nei suddetti casi, ogni somma dovuta a qualsiasi titolo a OFOLUX S.r.l. diventa immediatamente esigibile. L'Acquirente sarà tenuto al pagamento integrale dei prodotti anche nel caso in cui sorgano eccezioni, contestazioni o controversie che verranno definite solo successivamente alla corresponsione di quanto dovuto. L'acquirente rinuncia preventivamente a chiedere la compensazione con eventuali crediti, comunque originatisi, nei confronti di OFOLUX S.r.l.
- 12. PROPRIETÀ DELLA MERCE**
OFOLUX S.r.l. resta proprietaria della merce fino al completo pagamento della stessa da parte del cliente.
- 13. FORO COMPETENTE**
Le presenti Condizioni Generali e i relativi contratti di fornitura saranno disciplinati dalla legge italiana. Per qualsiasi ed eventuale controversia si intende competente il Foro di Varese.



GENERAL TERMS AND CONDITIONS OF SALES

- 1. SCOPE**
Our sales/offers are subject to the present general terms and conditions of sale.
Any additional or different terms proposed by the Buyer will not be binding upon OFOLUX S.r.l., unless specifically assented to in writing by OFOLUX S.r.l. and, in any case, will not exclude the validity of the present General Terms and Conditions which they will have to be coordinated with.
- 2. ORDERS**
Any orders achieved by OFOLUX S.r.l., sale representatives or any other commercial intermediary shall not be binding unless confirmed in writing by OFOLUX S.r.l.
- 3. SHIPMENT**
OFOLUX S.r.l. shall remain responsible for risk of loss to the products only until delivered to the carrier, at that moment any relevant risk shall pass onto the Buyer that is required to verify the state of the packaging and the quantity received upon delivery. All claims concerning the state of the packaging must be made directly to the carrier at the time of delivery.
- 4. DELIVERY**
The deliveries or shipments are understood as being ex-factory in Brunello (VA) and exclusive of tax or duty.
Delivery terms are merely indicative and are calculated on working days' basis. OFOLUX S.r.l. is not responsible for damages in case of advanced or postponed deliveries, both total and partial.
In case the Buyer does not fulfill all its obligations regarding payments, then OFOLUX S.r.l. will be entitled to suspend or delay any delivery of the Products until the Buyer has settled any outstanding amounts.
- 5. EXCUSABLE DELAYS**
OFOLUX S.r.l. shall not be considered to be in breach or default of its obligations under the contract if such breach or default, directly or indirectly, is due to:
 - causes beyond its reasonable control and/or due to force majeure events;
 - acts (or omissions) of the Buyer including failure to promptly provide OFOLUX S.r.l. with information and approvals necessary to permit OFOLUX to proceed with its work;
 - failure by the Buyer in complying with the terms of payment;
 - inability to obtain materials, components or services necessary to perform the work on account of causes beyond the reasonable control of OFOLUX.In the event of any such delay, OFOLUX S.r.l. shall notify it to the Buyer. The date of delivery shall be extended for a period equal to the time lost due to the delay, plus such additional time as may be reasonably necessary to overcome the effect of such excusable delay. OFOLUX S.r.l. shall notify the Buyer, as soon as possible, of the revised delivery date.
- 6. PRICES**
The prices are indicated exclusive of VAT tax.
OFOLUX reserves the right to modify at any time the prices in effect, by giving written notice to the Buyer, if there is any increase in the cost of raw materials, labor or any other production factors which affects in a substantial way the production costs.
All prices are Ex works, unless different agreement between the parties.
- 7. QUALITY DEFECTS AND RETURNS**
Notifications of defects are only taken into consideration if these are submitted in writing no later than 8 days after receipt of the goods. The Buyer shall notify in written non apparent and/or operation defects (i.e. defects that are found only after the products' use) within 8 days after the discovery of the defect and in any case within the validity of the warranty period.
Goods about which a complaint is made may only be returned with the express consent of OFOLUX, free of transport charge at OFOLUX plant, accompanied by delivery note and relating purchase details.
The packaging must be intact and in the same conditions of supply.
- 8. WARRANTY**
OFOLux assures that all the products produced in their factory are consistent with the technical features declared and will fit performances expected.
The warranty is intended for 24 (twenty-four) months from the date of receipt of the goods.
This warranty provides, at OFOLUX own discretion: a) the repair of the defective products or b) the replacement free of charge, within a reasonable time considering the importance of the claim, with transport cost charged to OFOLUX S.r.l. or c) the issue of a credit note to refund to the Buyer the price of the defective products as specified in the invoice.
If, during OFOLUX's intervention, the defect results not to be attributable to OFOLUX 's responsibility, any expenses and costs of repairing or replacing the defective products will be borne by the Buyer.
In no event shall OFOLux be responsible for incidental or consequential damages, for improper use not depicted in user's instructions or installation made by non-qualified personnel and for repairs or alterations made by other than OFOLux.
- 9. OTHER CLAIMS FOR DAMAGES**
The total liability of OFOLUX S.r.l. on all claims of any kind, whether in contract, warranty, indemnity, strict liability, or otherwise, arising out of the performance or breach of the contract or use of any product, shall not exceed the value of the product such liability is related to.
In no event shall OFOLUX S.r.l. be liable for loss of profit or revenues, loss of use of the product or any associated equipment, claims of Buyer's or third parties for such damages, or for any other damages.
- 10. TECHNICAL DATA AND LIABILITIES**
The indications of sizes and designs in any publication OFOLUX are intended for informational purposes only and may be subject to change without notice. OFOLUX reserves the right to modify the Goods to comply with statutory or UE regulations and to improve performance. It is OFOLUX's policy to endeavour to develop and improve its Goods, and accordingly OFOLUX reserves the right to change specifications without prior notification or public announcement. OFOLUX products comply with current European laws and rules; the Buyer is solely responsible for eventual differences between European laws and the laws of the location where the products are to be installed, holding OFOLUX S.r.l. harmless of any consequences thereof.
OFOLUX S.r.l. guarantees its products' performances exclusively in relation to uses, applications, tolerances etc., expressly specified by OFOLUX itself.
- 11. PAYMENTS**
Payments will have to be made in compliance with the instructions specified in the quotation or in the order confirmation. All payments shall be deemed net OFOLUX's domicile.
In the event of default in payment by the due date, OFOLUX reserves the right to charge interest on money overdue in accordance with the Late Payment of Commercial Debts (Interest), until payment in full is made.
In such events, OFOLUX shall be entitled:
 - to suspend all further deliveries on any contract between OFOLUX and the Buyer, even in case these are not referred to the delayed payment;
 - to change the payment and discount terms for the next supplies, asking for advanced payments or other guarantees.Moreover, any amount due to OFOLUX becomes immediately payable. Even in case of a dispute between the parties, the Buyer is not released from the obligation to comply with the payment terms in full. No set off whatsoever is allowed (including, without limitation, setoff under other contracts with OFOLUX).
- 12. RESERVATION OF TITLE**
Title to the products shall not pass to the Buyer until OFOLUX S.r.l. has received all amounts due and payable by the Buyer.
- 13. DISPUTE RESOLUTION**
Any disputes arising out of or in connection with such General Terms and Conditions shall be settled by the ordinary law courts of Varese (Italy) in accordance with the Italian Law.

[illegible]



light in motion



OFOLux S.r.l.
Via Campo di Maggio 17/C
21020 Brunello (VA) - Italy
Tel.: +39 0332 458082 Fax: +39 0332 458770
www.ofolux.it info@ofolux.it