



T-Grid C 20/20

REINFORCEMENT

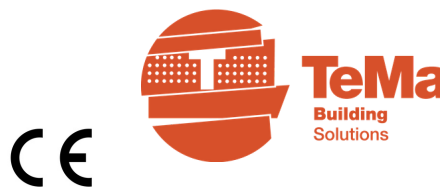

DESCRIPTION

Knitted grid from high-tenacity multifilament polyester yarns with black polymeric coating which can provide best resistance of UV and durability.

APPLICATIONS

Flat green surfaces.

tol.

TECHNICAL DATA SHEET

Raw material	PET
Coating	Polymeric

Mechanical properties

Tensile strength MD-T _{ULT} /CMD	(EN ISO 10319)	≥20/≥20 kN/m	
Elongation at max load MD/CMD	(EN ISO 10319)	10/11 %	±2,5
Tensile strength MD at 2% of elongation	(EN ISO 10319)	5 kN/m	±10%
Tensile strength MD at 5% of elongation	(EN ISO 10319)	10 kN/m	±10%

Dimensions

Roll width	4,15 - 5,25 m	±0,1
Roll length	100 m	±0,5
Mesh dimensions MD/CMD	29x29 mm	±3

MD: Machine direction - direzione longitudinale

CMD: Cross machine direction

Storage: cool and dry, protect against sunlight, use within 24 months after receipt.

The information given in this data sheet is to the best of our knowledge true and correct. TeMa srl reserves the right to change its product specifications at any time. It is the responsibility of the specifier and purchaser to ensure that product specifications used for design and procurement purposes are current and consistent with the products used in each instance.

TeMa Technologies and Materials s.r.l.

Via dell'Industria, 21 - 31029 Vittorio Veneto (TV) - Tel. +39 0438 50 31 - Fax +39 0438 50 34 60
www.temacorporation.com - email: info@temacorporation.com