


Th2 Stop E

WATERPROOFING, VAPOUR BARRIER




DESCRIPTION

Three-layer, elastic waterproofing membrane for application under ceramic tiles to protect floors and walls from moisture and vapour migration. Complete system with accessories.

APPLICATIONS

Bathrooms, showers, undertile waterproofing.

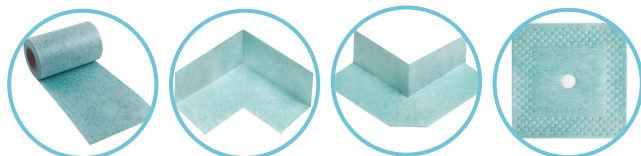

tol.

TECHNICAL DATA SHEET

Fabric raw material		PP	
Core raw material (+ UV stabiliser)		Special PP blend modified with an ethylene component	
Thickness	(EN 1849-2)	0,17 mm	±0,05

Composite

Weight	(EN 1849-2)	240 g/m ²	±15%
Thickness at 2 kPa	(EN 1849-2)	0,5 mm	±0,15

Physical properties

Chemical Resistance in the installed conditions	(EN 1847) (EN 527-3)	Resistant to alkali and acids	
---	-------------------------	-------------------------------	--

Mechanical properties

Pull out test (cem. glue)	(EN 1348)	0,4 N/mm ²	±0,2
Tensile strength MD/CMD	(EN 12311-2)	350/50 N/50mm	±20%
Elongation at max load MD/CMD	(EN 12311-2)	60/200 >50/60	±10%

Roll dimensions

Length	30 m	±0,2
Width	1 m	±0,1
Rolls/pallet	30	

MD: Machine direction / CMD: Cross machine direction

Storage: cool and dry, protect against sunlight, use within 24 months after receipt.

The information given in this data sheet is to the best of our knowledge true and correct. TeMa srl reserves the right to change its product specifications at any time. It is the responsibility of the specifier and purchaser to ensure that product specifications used for design and procurement purposes are current and consistent with the products used in each instance.

TeMa Technologies and Materials s.r.l.

Via dell'Industria, 21 - 31029 Vittorio Veneto (TV) - Tel. +39 0438 50 31 - Fax +39 0438 50 34 60
www.temacorporation.com - email: info@temacorporation.com