



T-Kone S

MECHANICAL PROTECTION, DAMP PROOFING,
VENTILATION, DRAINAGE

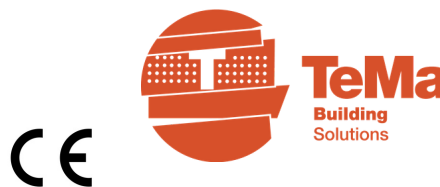

DESCRIPTION

Polyethylene studded membrane, for mechanical protection of waterproofing.

APPLICATIONS

Foundations and below-ground building structures.

tol.

TECHNICAL DATA SHEET

Mass	(EN 9864)	400 g/m ²	±5%
Thickness	(EN 9863-1)	8 mm	±10%
Compression resistance		>100 kPa	±20%
Tensile strength MD/CMD	(EN 12311-2)	>150 / >100 N/50mm	
Elongation at max load MD/CMD	(EN 12311-2)	>20 / >15 %	

Dimensions

Roll width	1 - 1,5 - 2 - 2,4 - 3 m	±3%
Roll length	20 m	±2%
Rolls/pallet	30 - 20 - 15 - 15 - 20	

MD: Machine direction

CMD: Cross machine direction

Storage: cool and dry, protect against sunlight, use within 24 months after receipt.

The information given in this data sheet is to the best of our knowledge true and correct. TeMa srl reserves the right to change its product specifications at any time. It is the responsibility of the specifier and purchaser to ensure that product specifications used for design and procurement purposes are current and consistent with the products used in each instance.

TeMa Technologies and Materials s.r.l.

Via dell'Industria, 21 - 31029 Vittorio Veneto (TV) - Tel. +39 0438 50 31 - Fax +39 0438 50 34 60
www.temacorporation.com - email: info@temacorporation.com