


Th2 Stop

WATERPROOFING, VAPOUR BARRIER




DESCRIPTION

Three-layer waterproofing membrane for application under ceramic tiles to protect floors and walls from moisture and vapour migration. Complete system with accessories.

APPLICATIONS

Bathrooms, showers, undertile waterproofing.

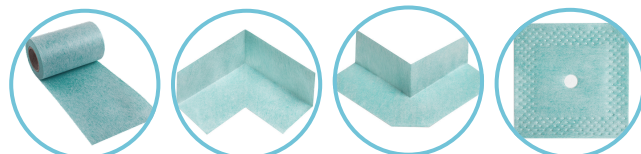

tol.

TECHNICAL DATA SHEET

Fabric raw material		PP	
Core raw material (+ UV stabiliser)		LDPE	
Thickness	(EN 1849-2)	0,22 mm	±0,05

Composite

Weight	(EN 1849-2)	275 g/m ²	±10%
Thickness at 2 kPa	(EN 1849-2)	0,6 mm	±0,15

Physical properties

Water penetration / watertightness under installed conditions penetration	(EN1928 B) (PG AIV F 3,8)	1,5 bar (24 h no leakage)	
Water vapour transmission (procedure method E)	(ASTM E96-15)	0,033 gr/ft ² /hr/(in Hg)	
Chemical resistance in the installed conditions	(EN 1847) (EN 527-3)	Resistant to alkali and acids	

Mechanical properties

Robinson Wheel test	(ASTM C 627)	Heavy Commercial Rating	Test Report #TJ1732, made by QAI Testing laboratory	
Pull out test (cem. glue)	(EN 1348)		0,4 N/mm ²	±0,2
Tensile strength MD/CMD	(EN 12311-2)		300/250 N/50 mm	±10%
Elongation at max load MD/CMD	(EN 12311-2)		>50/60%	±10%

Roll dimensions

Length	5-10-30 m		±0,2
Width	1 m		±0,1
Rolls/pallet	30 (for 30 m rolls)		

MD: Machine direction / CMD: Cross machine direction

Storage: cool and dry, protect against sunlight, use within 24 months after receipt.

The information given in this data sheet is to the best of our knowledge true and correct. TeMa srl reserves the right to change its product specifications at any time. It is the responsibility of the specifier and purchaser to ensure that product specifications used for design and procurement purposes are current and consistent with the products used in each instance.

TeMa Technologies and Materials s.r.l.

Via dell'Industria, 21 - 31029 Vittorio Veneto (TV) - Tel. +39 0438 50 31 - Fax +39 0438 50 34 60
www.temacorporation.com - email: info@temacorporation.com