




BUILDING

PRODUCT RANGE



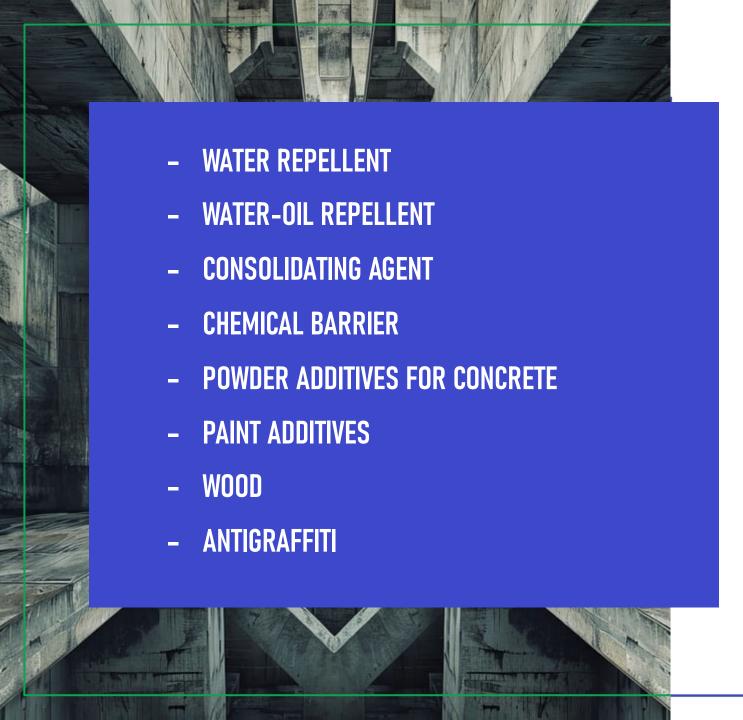



PRODUCT RANGE





WATER REPELLENT


WATER REPELLENTS BASED ON SILANE AND SILOXANE IN WATER OR SOLVENT FORMULATION FOR DIFFERENT TYPES OF MATERIALS

- REDUCTION OF CAPILLARY WATER ABSORPTION BY AT LEAST 80%
- WATER VAPOR PERMEABILITY
- HIGH PENETRATION DEPTH
- ALKALI RESISTANCE
- UV RAY STABILITY
- REDUCTION OF MAINTENANCE AND REPAIR COSTS
- BETTER CLEANING OF TREATED SURFACES
- LOWER HEATING COSTS



WATER REPELLENT

HYDROPROOF	H 250	H 250 B	H 245 B	H 242	H 629
CHEMICAL NATURE	SILANE	SILANE - SILOXANE	SILANE	SILICONIC RESIN	SILANE - SILOXANE
ACTIVE MATTER	Approx. 50	Approx. 50	Approx. 45	Approx. 55	Approx. 100
CARRIER	WATER	WATER	WATER	WATER	-
DILUTION	3-10 %	3-10 %	5-10 %	3-10 %	3-10 %
PROPERTIES					
WATER REPELLENCY	•••	•••	•••	•••	•••
ANTI EFFLORESCENCE	••••	••	•••	••	•••
BEADING EFFECT	•	••••	•••	••••	••••

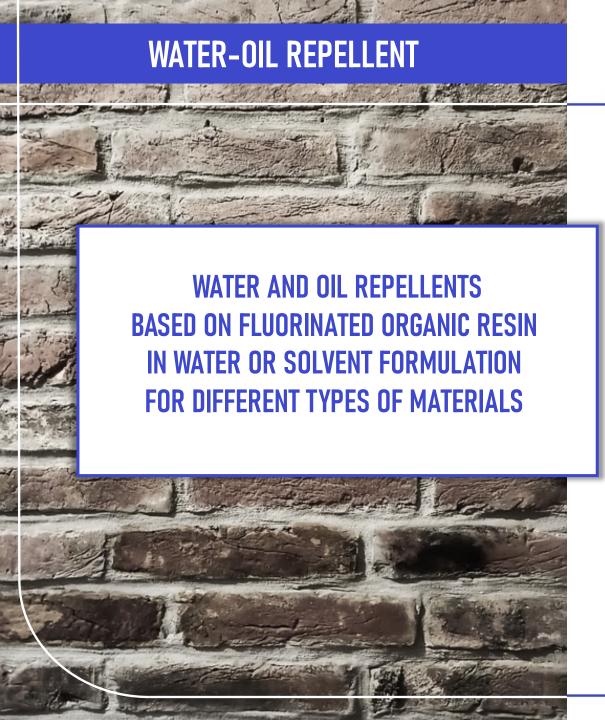




- ANTI-STAIN
- REDUCTION OF WATER ABSORPTION
- REDUCTION OF OIL AND GREASE ABSORPTION
- EASY TO CLEAN

WATER-OIL REPELLENT



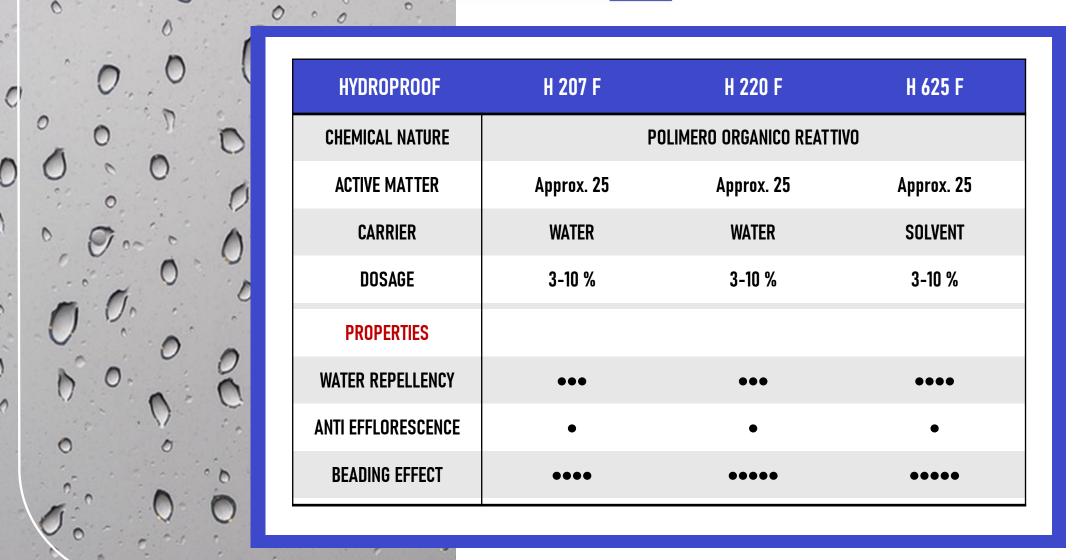



CONSOLIDATING AGENT FOR DIFFERENT TYPES OF MATERIALS

BENEFITS:

- EXCELLENT CONSOLIDATION PROPERTIES
- WATER REPELLENCE
- ANTI EFFLORESCENCE

CONSOLIDATING

HYDROPROOF	СНР	ES 40	
CHEMICAL NATURE	SILICATE	SILICATE	
ACTIVE MATTER	Approx. 35	Approx. 40	
CARRIER	WATER	SOLVENT	
DILUTION	UP TO 20%	UP TO 20%	
PROPERTIES			
WATER REPELLENCY	••••	••	
ANTI EFFLORESCENCE	•••	••••	
CRACK CONTROL	••••	••••	



CHEMICAL BARRIER



SILAN/SILOXANE-BASED PRODUCTS IN BOTH LIQUID AND GEL FORM TO BE INJECTED INTO THE WALLS USING DIFFERENT TECHNIQUES.

- READY-TO-USE PRODUCT
- OPTIMIZED FOR PRESSURE-FREE APPLICATION
- EASY TO USE
- REDUCES EXECUTION TIMES
- SUITABLE FOR HIGH MOISTURE CONTENTS
- HIGH MIGRATION INTO THE MINERAL SUPPORT
- ALKALI RESISTANCE



CHEMICAL BARRIER




	- FEE			
4000 18	HYDROPROOF	CREAM 80	CREAM 25	CB 55
Real Property of	CHEMICAL NATURE	SILANO - SILOSSANO	SILANO - SILOSSANO	SILANO - SILOSSANO
阿拉斯	ACTIVE MATTER	Approx. 80	Approx. 25	Approx. 55
	ASPECT	CREAM	CREAM	LIQUID
Spinister Bassellers	PROPERTIES			
4000 图制设	WATER REPELLENCY	••••	•••	•••
-	ANTI EFFLORESCENCE	••••	••••	••••
	MIGRATION	••••	•••	•••
	の概念語類の	200		



POWDER ADDITIVES FOR CONCRETE

- LOW WATER ABSORPTION COEFFICIENTS
- INCREASED RESISTANCE TO FREEZE-THAW CYCLES
- EXCELLENT DROPLET EFFECT
- REDUCTION OF DIRTYING
- DURABILITY
- EFFECTIVE EVEN AT LOW DOSAGES
- NO VARIATION OF THE MECHANICAL PROPERTIES OF CEMENT MIXTURES.







POWDER ADDITIVES FOR CONCRETE


HYDROPROOF	P 30	P 80	P 200
CHEMICAL NATURE	SILANE - SILOXANE	SILANE	SILANE
SUPPORT	SILICA	SILICA/PVA	SILICA/PVA
DOSAGE	0,2 - 1 %	0,1 - 1 %	0,1 - 0,3 %
PROPERTIES			
WATER REPELLENCY	••	••••	••••
ANTI EFFLORESCENCE	••••	••••	••••
CRACK CONTROL	•••	••••	••••







FUNCTIONAL AND FLEXIBLE PRODUCTS TO PROTECT WOOD FROM WATER.



PROTECTIVE FOR WOOD



HYDROPROOF	WP 24	WP 69	WP 22 F	WP 68 F	PUREWAX HE 30	PUREWAX C 30
CHEMICAL NATURE	SILICONIC RESIN	SILANE-SILOXANE	FLUOROPOLYMER	FLUOROPOLYMER	POLIETHYLENIC WAX	CARNAUBAWAX
ACTIVE MATTER	Approx. 50	Approx. 95	Approx. 25	Approx. 25	Approx. 30	Approx. 30
CARRIER	WATER	SOLVENT	WATER	SOLVENT	WATER	WATER
DILUTION	3-10 %	3-10%	3-10 %	3-10 %	-	-
PROPERTIES						
WATER REPELLENCY	•••	•••	••••	••••	•••	•••
OIL REPELLENCY	-	-	••	•••	-	-
UV PROTECTION	••	••	•	•	••••	••••





BENEFITS:

- LOW WATER ABSORPTION
- WATER VAPOR PERMEABILITY
- SOLVENT-FREE EMULSION
- REDUCTION OF MOLD AND ALGAE FORMATION
- PREVENTS PEELING AND CRACKING PROBLEMS

PAINT ADDITIVE

HYDROPROOF	PRIMER	ADDITIVE	BINDER
CHEMICAL NATURE	SILANE	SILOXANE	SILOXANE
ACTIVE MATTER	Approx. 50	Approx. 55	Approx. 55
CARRIER	WATER	WATER	WATER
DOSAGE	3-5 % IN PAINT	1-5 % IN PAINT	1-5 % IN PAINT
PROPERTIES			
WATER REPELLENCY	••••	••	•••
ANTI EFFLORESCENCE	•••	••••	•••
BEADING EFFECT	••••	••••	••



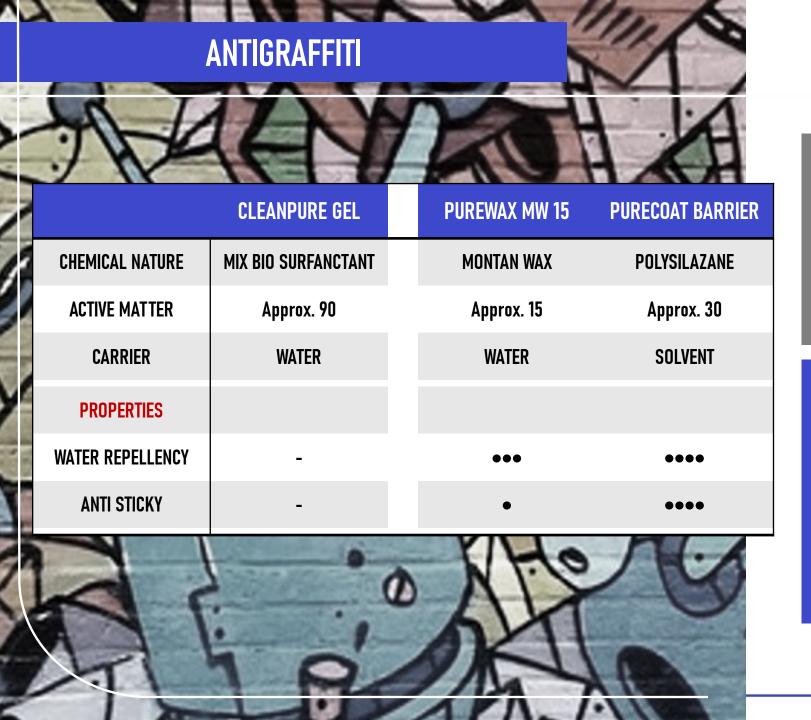



ECO-FRIENDLY GEL FOR GRAFFITI REMOVAL AND PRODUCTS FOR PERMANENT OR SACRIFICIAL BARRIER

- Transparent Coating
- Permanent non-filming barrier
- Biodegradable Cleaner