

AERONAUTICAL SECTOR



- FRICTION REDUCTION (UP TO 7%)
- TURBOLENCE REDUCTION (UP TO 4%)
- REDUCTION OF COATING EROSION
- INCREASING OF RESISTANCE FROM DIRT AND DUST
- WEATHERING RESISTANCE (RAIN, SUN, HAIL, FREEZING-THAW, ETC.)
- CORROSION RESISTANCE FROM SEA SALT AND WATER
- ANTIFREEZE, PREVENT ICE STICKING
- INCREASING OF HARDESS AND IMPROVING OF IMPACT RESISTANCE
- MAINTENANCE COST REDUCTION

APPLICATION :**HYPERCOAT® 90103**

- Top Coating of aircraft

HYPERCOAT® WS 82

- Glass

PROPERTIES OF HYPERCOAT® RANGE:

- Excellent substrate adhesion
- UV and chemical resistant
- High hardness
- Excellent easy-to-clean properties
- Permanent barrier layer
- Good corrosion protection
- No weight impact of treatment
- Very good temperature stability up to 1000 ° C
- Excellent weather resistance




PROPERTIES	HYPERCOAT® 90103	HYPERCOAT® WS 82
HARDNESS	••	•
REDUCTION OF FRICTION	•••	•
FLEXIBILITY	••	•••
EASY TO CLEAN	•••	•••

LEGEND • LOW •• MEDIUM ••• HIGH

CLEANING OF SURFACE:

IF THE SURFACE IS VERY DIRTY, IT CAN BE CLEANED WITH A SPECIFIC PRODUCT FROM OUR RANGE (PURECLEAN) AND, BEFORE APPLICATION, DRIED BY ISOPROPYL ALCOHOL. ONCE THE PRODUCT HAS BEEN APPLIED, CLEANING OF THE SURFACE WILL BE VERY SIMPLE (EASY TO CLEAN) AND CAN BE DONE SIMPLY BY WATER OR OUR NEUTRAL CLEANING PRODUCT

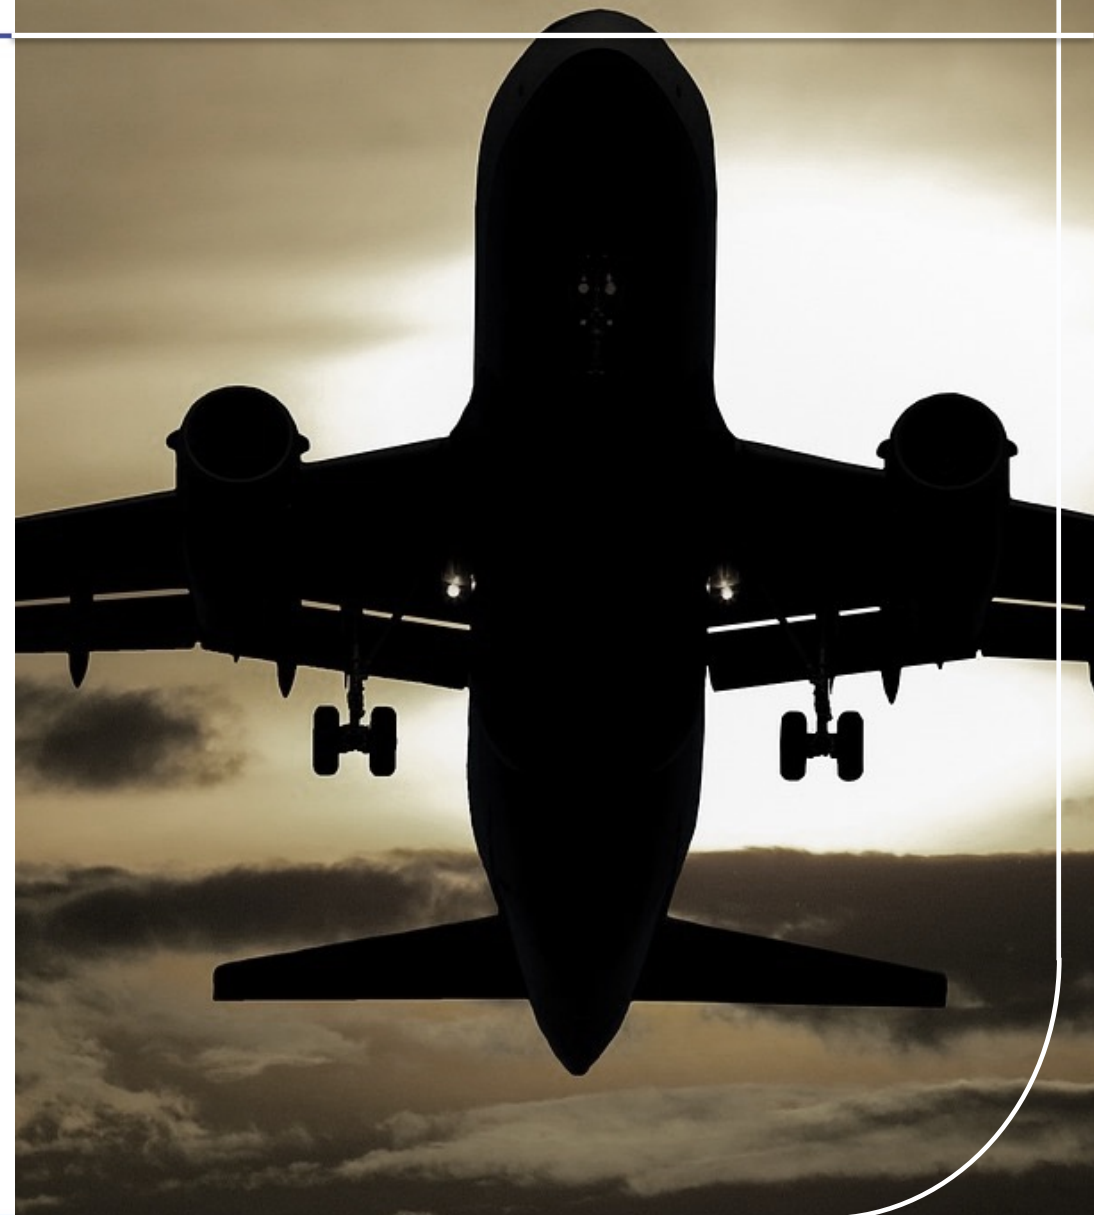

- **SUPERFICIAL HARDNESS**
- **THERMAL CYCLES**
- **QSUN TEST**
- **FRICTION AND TURBULENCE**
- **CONTACT ANGLE**
- **TAPE TEST (X-CUT) (ISO 2409:2020)**
- **SQUARING (ASTM 3359 Method)**
- **ADHESION TEST (ISO 2409)**

TESTS CARRIED OUT

SUPERFICIAL HARDNESS

The experimental hardness tests were carried out on carbon fiber panels with the following features:

TYPE OF APPARATUS	DUROMETER
PRODUCER	INNOVATEST
MODEL	NEMESIS 9000
TYPE OF INDENTER	BRINELL 2,5 mm
APPLIED LOAD [kgf]	62,5
LOAD APPLICATION TIME [s]	10



The testing machine is equipped with an optical microscope with magnification up to 10x and an indenter positioning sensor. For each slab, two rectangular-shaped specimens measuring 50x25 mm were cut, and 3 acquisitions were performed on each of them at different points, for a total of 6 hardness acquisitions for each slab

MATERIAL	BRINELL HARDNESS		
	AVERAGE	DEV. STD.	% VARIATION
Plate 1 – HYPERCOAT 90103	67,12	0,66	+ 14% RESPECT UNTREATED
Plate 2 – Untreated	57,99	1,34	-



The certified laboratory MotivexLab in Avigliana (TO) carried out thermal cycle tests on different fuselage materials painted and subsequently treated with the HYPERCOAT® 90103 product.

Titolo di Prova: RESISTENZA AI CICLI TERMICI*Title of Test: Thermal cycles resistance***Strumento:** Camera climatica ID.281*Equipment: Climatic chamber ID.281***Metodo di Prova:** MotivexLab*Standard*

INIZIO PROVA: 13/06/2023
Test start

FINE PROVA: 14/06/2023
Test end

DURATA PROVA: 18 ore
Test lenght

DESCRIZIONE DEL CICLO:
Cycle description

1. $T_0 = 23^{\circ}\text{C} \pm 1^{\circ}\text{C}$
2. -70°C a $2^{\circ}\text{C}/\text{min}$
3. Stabilizzazione per 3 ore (-70°C)
4. Da -70°C a -51°C a $2^{\circ}\text{C}/\text{min}$
5. Stabilizzazione 1 ora e 30 min (-51°C)
6. Da -51°C a $+23^{\circ}\text{C}$ a $2^{\circ}\text{C}/\text{min}$

1. $T_0 = 23^{\circ}\text{C} \pm 1^{\circ}\text{C}$
2. -70°C at $2^{\circ}\text{C}/\text{min}$
3. Stabilisation for 3 hours (-70°C)
4. From -70°C to -51°C to $2^{\circ}\text{C}/\text{min}$
5. Stabilization 1 hour and 30 min (-51°C)
6. From -51°C to $+23^{\circ}\text{C}$ to $2^{\circ}\text{C}/\text{min}$

Dopo 3 cicli non si osservano difetti.
After 3 cycles no defects are observed.





Evaluation after 800 hours QSUN TEST of the resistance of surface coating on paint obtained with HYPERCOAT 90103, alternating UV rays, heat, water and rest period.

CONCLUSIONS:

The protection after 800 hours has maintained the initial gloss level, has remained intact and has not lost its mechanical characteristics.

The protection has passed the QSUN test, lasting 800 hours in total in outdoor conditions. The material has been protected from UV rays, hot-cold cycles and the humidity expected in Qsun outdoor cycles.



Analysis of the effects of the surface coating treatment carried out with HYPERCOAT 90103

The tests were carried out in the Wind Tunnel of the Department of Civil and Industrial Engineering of the University of Pisa having the following characteristics:


- Closed-circuit subsonic tunnel and open test chamber;
- Circular test section (1.1 m diameter and 1.42 m long);
- Free-flow turbulence level of 0.9%;

The model is NACA 0021 composed of two parts in aluminum alloy:

- a front body with a 3:1 elliptical profile and
- a cylindrical main body with a sharp-edged base perpendicular to the axis.

The characteristic dimensions are:

- Diameter $d=70$;
- Length $l=400$ mm.

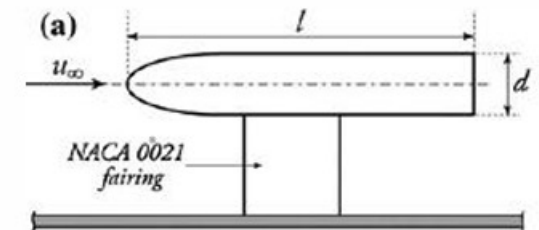

Velocity and pressure measurements were conducted in order to characterize the flow around an axisymmetric body, in order to evaluate the effects of a surface treatment. The thickness of the boundary layer increases with surface treatment.

The model treated with HYPERCOAT 90103 has a reduction of approximately 7.0% in surface friction and a decrease in turbulence of around 4%.

The table shows the slopes of the wall velocity profile, from which yes obtain the value of the friction action:

$$\tau_0 = \mu \left. \frac{\partial u}{\partial y} \right|_{\text{wall}}$$



The pressure maps attest to less suction on the base, and therefore less pressure resistance.



s/d	du/dy PRE	du/dy POST	riduzione (%)
0.1	216.6	199.3	8.0
0.2	209.0	197.4	5.6
1.0	191.4	177.3	7.4




CONTACT ANGLE

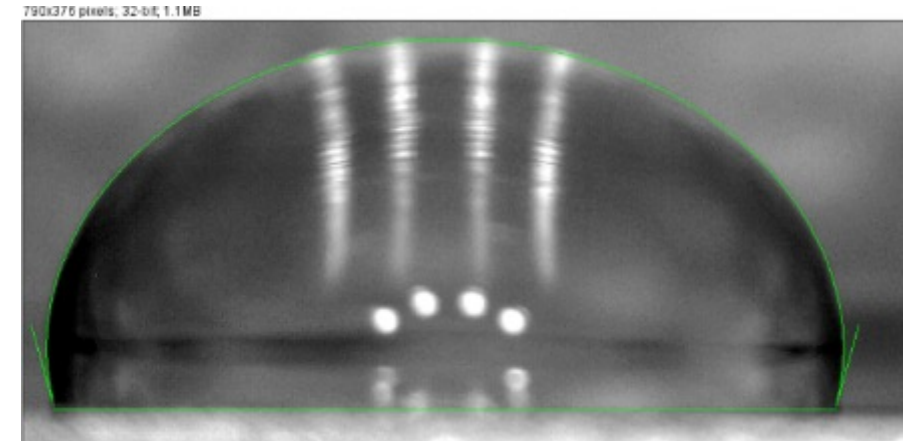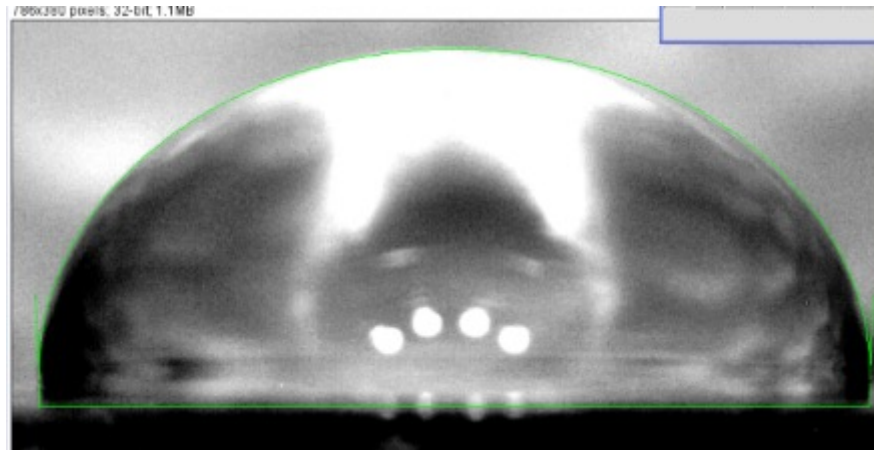

SAMPLE	CONTACT ANGLE	ROLLING ANGLE
Untreated sheet metal	92.3	15
Sheet metal with HYPERCOAT 90103	105	13

The sheet metal treated with the HYPERCOAT V3 product implements the contact angle value by **+ 14%** compared to the same untreated one.



SAMPLE TYPE: EPOXY PAINT COATED WITH HYPERCOAT 90103

NORMATIVE REQUIREMENTS:

Squareness test (UNI EN ISO 2409:2020).

Level rating: 2

No detachment of the surface treatment

NORMATIVE REQUIREMENTS:

Tape Test (ASTM 3359 Method)

Level rating: 4A

No detachment of the surface treatment



ADHESION TEST (ISO 2409)

ADHESION TEST according to ISO 2409

Standard PAINT	sample 1	ST0
	sample 2	ST0
	sample 3	ST0
With PURE-CHEM coating	sample 1	ST0
	sample 2	ST0
	sample 3	ST0

Requirements:

Adhesion test: ST0

Adhesion test after water immersion: ST0 or ST1

ADHESION TEST after water immersion 14 days at RT according to ISO 2812-2 and ISO 2409

Standard PAINT	sample 1	ST0
	sample 2	ST1
	sample 3	ST0
With PURE-CHEM coating	sample 1	ST0
	sample 2	ST0
	sample 3	ST1

SUN TEST XLS + UV OUTDOOR EXPOSURE

**SUNTEST XLS + exposure 1500h
(300 to 800 nm)**

Standard paint

No impact on color and gloss

With PURE-CHEM
coating

No impact on color and gloss

Outdoor UV exposure 3 month

Standard paint

No impact on color and gloss

With PURE-CHEM
coating

No impact on color and gloss

No impact of HYPERCOAT coating compared with standard paint system

