


BROCHURE V-VL SERIES

BIRAGHI POMPE 1906

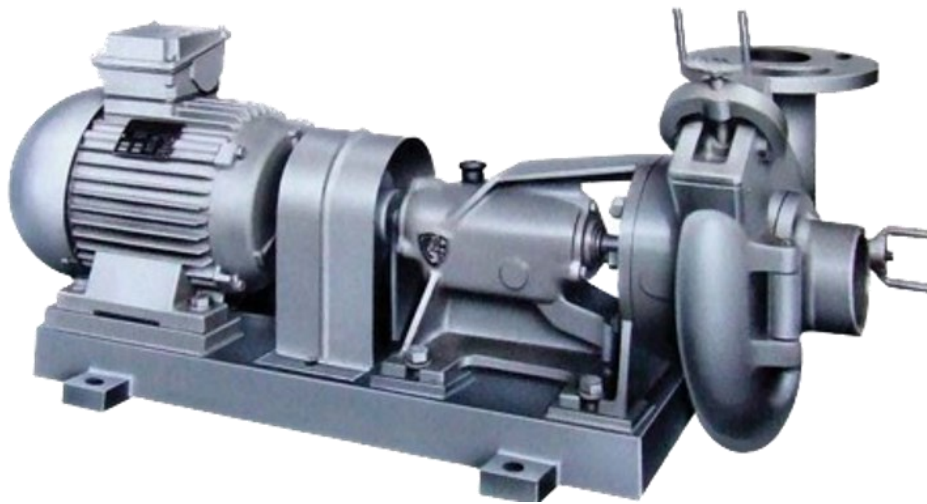

- ITALIAN QUALITY
- SINCE 1906

Centrifugal Process Pumps with open Impeller for dirty liquids

2025



V-VL SERIES—BIRAGHI POMPE 1906

V PROCESS PUMP

V pumps is a series of pumps specially designed to convey sludge, even containing solid suspended matter.

They are single-stage pumps with volute case provided with inspection and cleaning door. The suction cover has a port with threaded plug. It's provided with hinges and can be easily opened. The supporting is realized with a support outside the pump casing and provided with spaced ball bearings into bath lubrication.

The drive can be either direct through flexible coupling by electric or diesel etc. engine, or indirect cantilevered pulleys and trapezoidal belts (V-belts).

MATERIALS

- ⇒ Pump casing and impeller are made of cast iron
- ⇒ Shaft of stainless steel AISI 431
- ⇒ Rubber O-ring packing between pump casing and cover
- ⇒ Support made of cast iron

Capacitiy	to 115 m ³ /hr
Head	to 14 m
Max working pressure	to 6 bar
Temperature	to 140 C°

V-VL SERIES—BIRAGHI POMPE 1906

APPLICATIONS

To convey dense liquids up to 105 C°; for higher temperatures with cooled stuffing box

- ⇒ Sludge
- ⇒ Slurries
- ⇒ Dregs
- ⇒ Paper pulp
- ⇒ Every liquids containing solid suspended matter having the following maximum diameter



Revolution Speed : Up to 3500 RPM


Revolution direction: Right hand, if seen from the drive side, i.e. clockwise

CONSTRUCTION MATERIALS

	STANDARD	b ₁	b ₂	x ₆	g ₅	a	g ₂
Corpo pompa Pump case	Ghisa G25 Cast iron G25	Bronzo BZN7 Bronze BZN7	Bronzo B10 Bronze B10	AISI 316 AISI 316	Ghisa GS400/12 Cast. i. GS400/12	Acc. Fuso Stain. still	Ghisa al Ni Ni cast iron
Coperchio Cover	Ghisa G25 Cast iron G25	Bronzo BZN7 Bronze BZN7	Bronzo B10 Bronze B10	AISI 316 AISI 316	Ghisa GS400/12 Cast. i. GS400/12	Acc. Fuso Stain. still	Ghisa al Ni Ni cast iron
Diffusore Diffuser	Ghisa G25 Cast iron G25	Bronzo BZN7 Bronze BZN7	Bronzo B10 Bronze B10	AISI 316 AISI 316	Ghisa G25 Cast iron G25	Ghisa G25 Cast iron G25	Ghisa al Ni Ni cast iron
Girante Impeller	Ghisa G25 Cast iron G25	Bronzo BZN7 Bronze BZN7	Bronzo B10 Bronze B10	AISI 316 AISI 316	Ghisa G25 Cast iron G25	Ghisa al Ni Ni cast iron	Ghisa al Ni Ni cast iron
Anelli usura Wear rings	Ghisa G25 Cast iron G25	Bronzo BZN7 Bronze BZN7	Bronzo B10 Bronze B10	AISI 316 AISI 316	Ghisa G25 Cast iron G25	Ghisa al Ni Ni cast iron	Ghisa al Ni Ni cast iron
Supporto Support	Ghisa G25 Cast iron G25	Ghisa G25 Cast iron G25	Ghisa G25 Cast iron G25	Ghisa G25 Cast iron G25	Ghisa G25 Cast iron G25	Ghisa G25 Cast iron G25	Ghisa G25 Cast iron G25
Albero T.B. Shaft T.B.	Acc. 38NCD4 Stain. still 38NCD4	Acc. AISI 431 Stain. still AISI 431	Acc. AISI 431 Stain. still AISI 431	Acc. AISI 316 Stain. still AISI 316	Acc. 38NCD4 Stain. still 38NCD4	Acc. 38NCD4 Stain. still 38NCD4	Acc. AISI 316 Stain. still AISI 316
Albero T.M. Shaft T.M.	Acc. AISI 431 Stain. still AISI 431	Acc. AISI 431 Stain. still AISI 431	Acc. AISI 431 Stain. still AISI 431	Acc. AISI 316 Stain. still AISI 316	Acc. AISI 431 Stain. still AISI 431	Acc. AISI 431 Stain. still AISI 431	Acc. AISI 316 Stain. still AISI 316

V-VL SERIES—BIRAGHI POMPE 1906

OVERALL SIZES

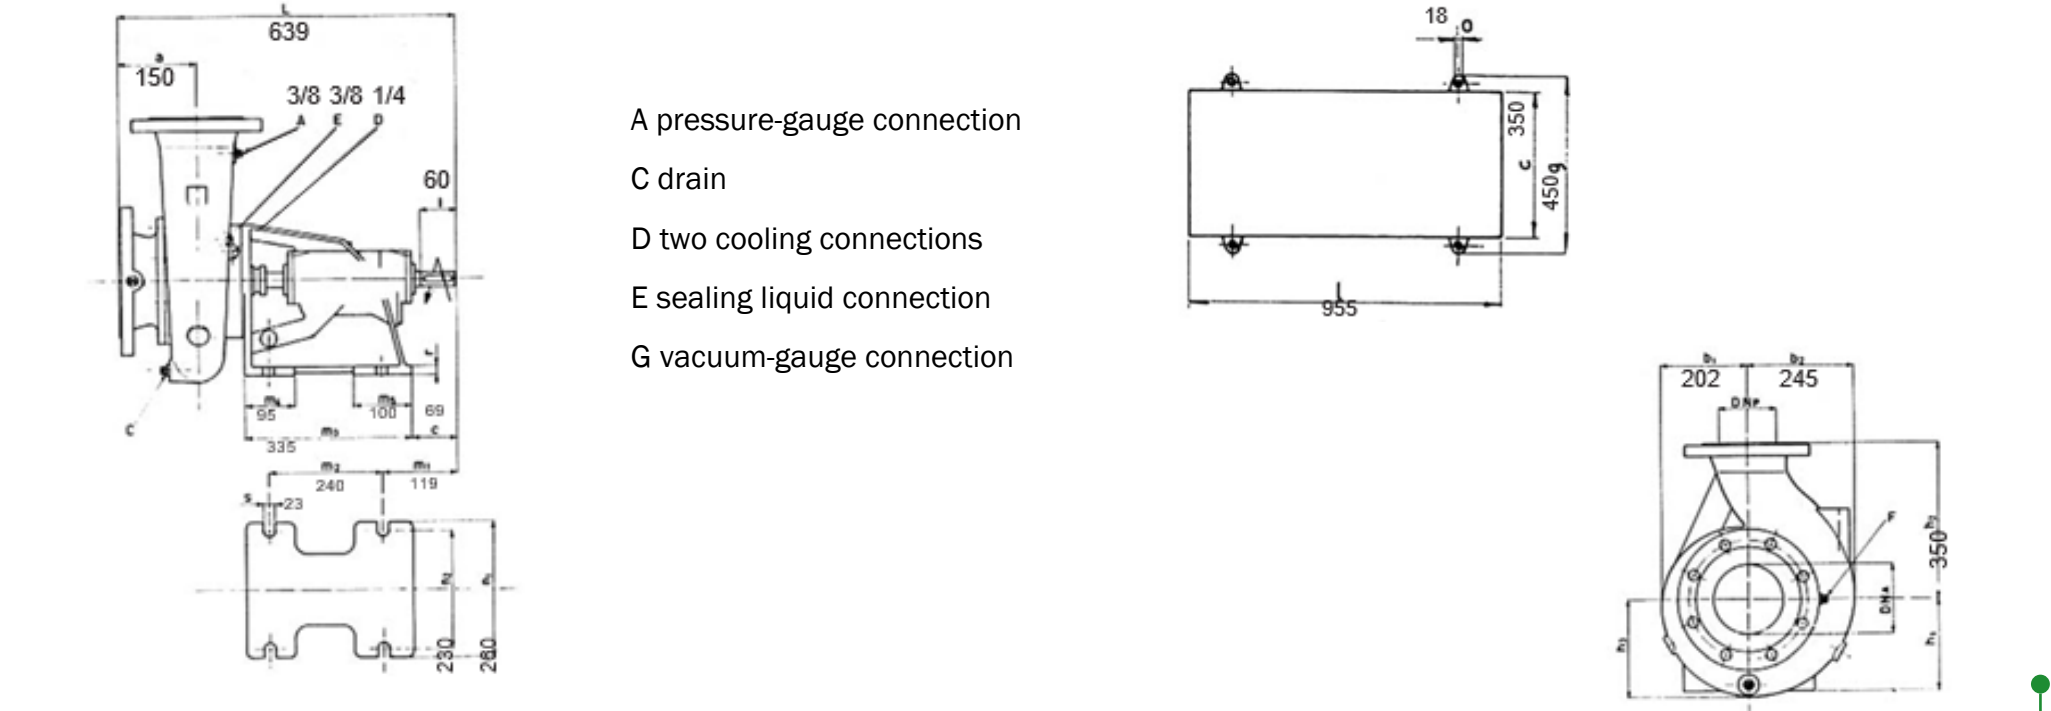

V-VL SERIES—BIRAGHI POMPE 1906

V PROCESS PUMP

V series pumps foresee also a Vertical series derived from the horizontal ones and thus have the same essentials features. The suction port is axial and turned downwards, provided with threaded plug; the discharge port is turned radially on the pump volute and provided with threaded counterflange.

The drive can be either direct through flexible coupling by electric motor or petrol engine (spark ignition, diesel, etc) provided with an angle RPM reduction gear with downward shaft. The maximum allowable distance between the lower surface of the mounting and the threaded plug end of the suction port is 4 M.

Supporting can be:

- ⇒ S – Simple supporting (deep groove support and thrust ball bearings located in the mounting) for centre distance up to 1,5 M
- ⇒ S/1 – Double supporting (ball bearing in the mounting – 1 grease lubricated, intermediate support) for centre distance up to 2,5 M
- ⇒ S/2 – Triple supporting (ball bearing in the mounting – 2 grease lubricated intermediate support) for centre distance up to 4 M

V-VL SERIES—BIRAGHI POMPE 1906

APPLICATION

To convey dense liquids:

- ⇒ Sludge
- ⇒ Slurries
- ⇒ Dregs
- ⇒ Paper pulp
- ⇒ Every liquids containing solid suspended matter having the following maximum diameter up to 40 mm

Capacity	to 115 m ³ /hr
Head	to 14 m
Max working pressure	to 6 bar
Temperature	to 140 C°




Revolution direction: Right hand, if seen from the drive side, i.e. clockwise

MATERIALS

- ⇒ Pump casing with volute case (provided with inspection and cleaning door) made of cast iron
- ⇒ Open impeller of hardened cast iron
- ⇒ Vertical propeller shaft made of steel C 40
- ⇒ Shaft housing of cast iron for centre distance of 1 M and of weld steel for centre distance over 1 M
- ⇒ Mounting in cast iron

V-VL SERIES—BIRAGHI POMPE 1906


OVERALL SIZES

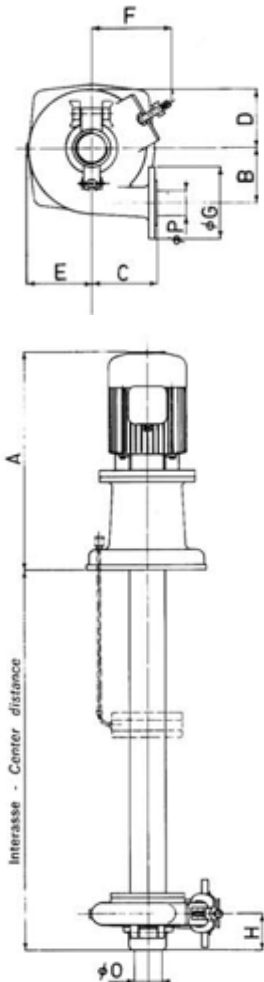

SPECIAL EXECUTIONS FOR BOTH SERIES

- ⇒ RP – stuffing box provided with cooling chamber with cold water circulation for liquids with temperature over 105 C
- ⇒ OT – mechanical seal unit in different matter according to the features of the liquids to be conveyed
- ⇒ BR – all parts contacting the liquid in bronze BZN7, shaft in stainless steel
- ⇒ BRA – all parts contacting the liquid in acid resistant bronze, shaft in stainless steel
- ⇒ X – all parts contacting the liquid in stainless steel

modello model	Dimensioni in mm (non impegnative) - Sizes in mm (not engaging)													
	A	B	C	D	E	F	G	H	I	L	M	N	O	P
VL 60	595	132,5	160	140	165	192	185	95	310	340	375	15	2 1/2"	60
VL 80	560	118	143	142	160	174	200	112	310	340	375	15	3"	80
VL 100	680	140	170	152	185	220	220	130	310	340	375	15	4"	100

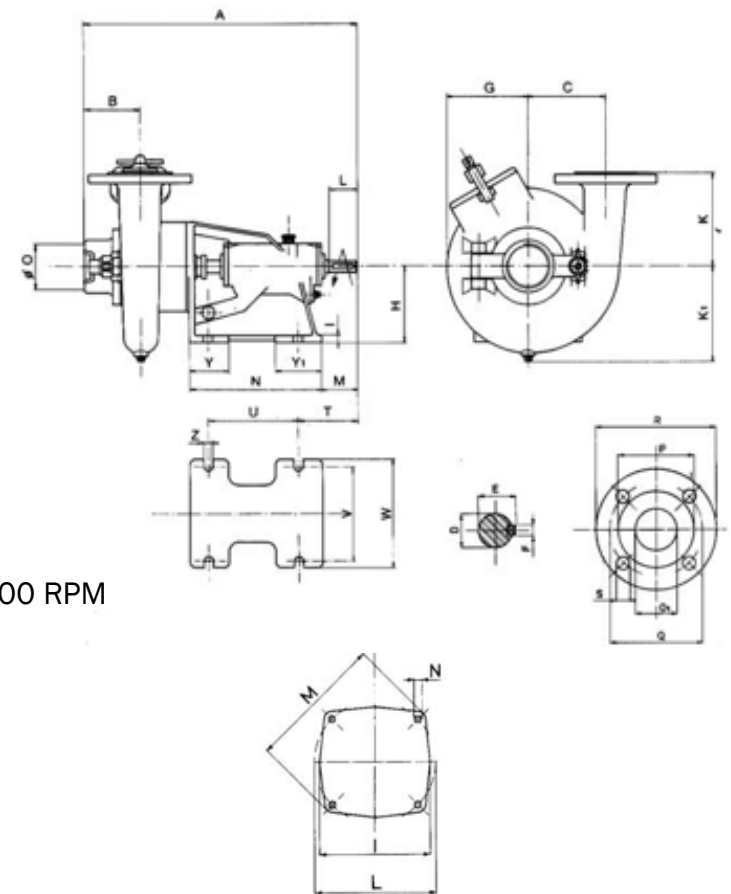

Revolution Speed : Up to 1700 RPM

Pumps for higher capacities upon request.

Flange secondo UNI 2236/2237/2229-PN 10 - Flanges according to UNI 2236/2237/2229-PN 10

modello	Dimensioni in mm (non impegnative) - Sizes in mm (not engaging)												
model	A	B	C	D	E	F	G	H	K	K ₁	I	L	M
V 60	471	95	132,5	18	20,5	6	140	112	160	165	13	40	70,5
V 80	490	112	118	18	20,5	6	142	112	143	160	13	40	70,5
V 100	578	130	140	24	27	8	152	160	170	185	18	60	76

modello model	Dimensioni in mm (non impegnative) - Sizes in mm (not engaging)													
	N	O	O ₁	P	Q	R	S	T	U	V	W	Z	Y	Y ₁
V 60	225	2 1/2"	60	122	145	185	18	103	160	150	180	15	60	60
V 80	225	3"	80	138	160	200	18	103	160	150	180	15	60	60
V 100	280	4"	100	158	180	220	18	126	190	200	230	19	85	95

N. 211/1
S - 1986

Biraghi Pompe 1906 Plants



NIGERIA



UAE



ITALY



Biraghi
POMPE1906

Via della Giardina 11
Monza (MB)
20900:

Contacts:
+39 02-89680866
info@biraghipompe1906.it

Copyright © 2018 Biraghi Pompe 1906 All Rights Reserved