

4PZ

Scala retrattile per soffitta con struttura rigida a 4 parti mobili composta da 10 gradini in acciaio verniciato bianco (RAL 9010) e telaio zincato.

4-section folding loft ladder with 10 white (RAL 9010) painted steel treads and galvanised frame.

Escalier escamotable droit avec structure rigide à 4 éléments mobiles composé de 10 marches en acier vernis blanc (RAL 9010) et d'un caisson galvanisé.

Escalera escamoteable de tramos con estructura rigida de 4 tramos móviles compuesta por 10 peldaños en acero barnizado blanco (RAL 9010) y marco galvanizado.



UNI EN 14975:2007



Portata 150 kg. Testata con carico di prova statico 260 kg
Capacity 150 kg. Tested with static test load of 260 kg
Charge maximale 150 kg. Testé avec charge statique de 260 kg
Carga 150 kg. Probada con carga de prueba estática 260 kg



Spedita completamente assemblata, pronta per essere installata.
Delivered completely assembled, ready to be installed.
Expédié complètement assemblé, prêt pour l'installation.
Se envía totalmente ensamblada, lista para ser instalada.



U = 1,1 W/m2K

Con coibentazione pannello + Termocover - With Hatch panel insulation + Termocover - Avec isolation du panneau + Termocover - Con aislamiento panel + Termocover

VARIANTI E AGGIUNTE POSSIBILI

Variants and additional accessories - Versions et suppléments possibles - Variantes e integraciones posibles



Botola in multistrato di pioppo
Poplar plywood hatch
Trappe en peuplier contreplaqué
Trampilla en multicapa de álamo



Botola in MDF E1
MDF E1 hatch
Trappe en MDF E1
Trampilla en MDF E1



Coibentazione pannello
Hatch panel insulation
Isolation du panneau
Aislamiento panel



Termocover
Termocover
Termocover
Termocover

MISURE BOTOLA DISPONIBILI


Hatch measurements available - Trappe Dimensions disponibles - Medidas de trampilla disponibles

HT 300 cm		Gradini - steps - marches - peldaños: 10			
		- Larghezza - Width - Largeur - Ancho			
		50	60	70	80
Lunghezza Lengt Longueur Longitud	90	SR4P/95.300	SR4P/96.300	SR4P/97.300	SR4P/98.300
	100	SR4P/105.300	SR4P/106.300	SR4P/107.300	SR4P/108.300
	110	SR4P/115.300	SR4P/116.300	SR4P/117.300	SR4P/118.300
	120	SR4P/125.300	SR4P/126.300	SR4P/127.300	SR4P/128.300
	130	SR4P/135.300	SR4P/136.300	SR4P/137.300	SR4P/138.300

HT 350 cm		Gradini - steps - marches - peldaños: 12	
		- Larghezza - Width - Largeur - Ancho	
		70	80
Lunghezza Length Longueur Longitud	120	SR4P/127.350	SR4P/128.350
	130	SR4P/137.350	SR4P/138.350


HT 400 cm		Gradini - steps - marches - peldaños: 14	
		- Larghezza - Width - Largeur - Ancho	
		70	80
Lunghezza Length Longueur Longitud	130	SR4P/137.400	SR4P/138.400

HT 425 cm		Gradini - steps - marches - peldaños: 15	
		- Larghezza - Width - Largeur - Ancho	
		70	80
Lunghezza Length Longueur Longitud	130	SR4P/137.425	SR4P/138.425

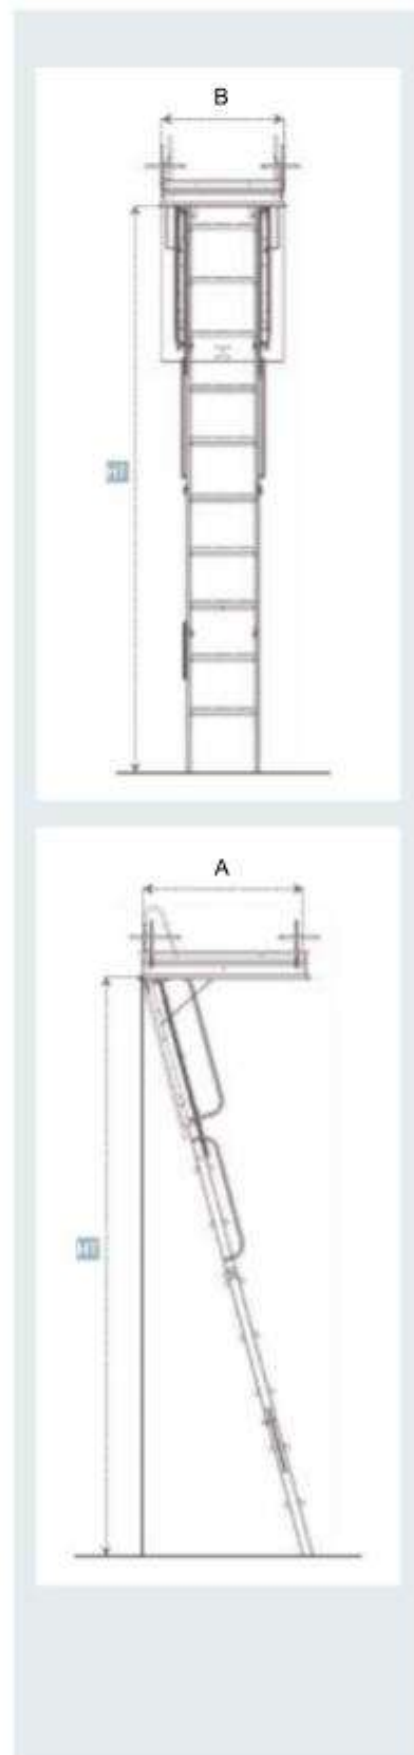

MISURE

Measurements - Dimensions - Medidas

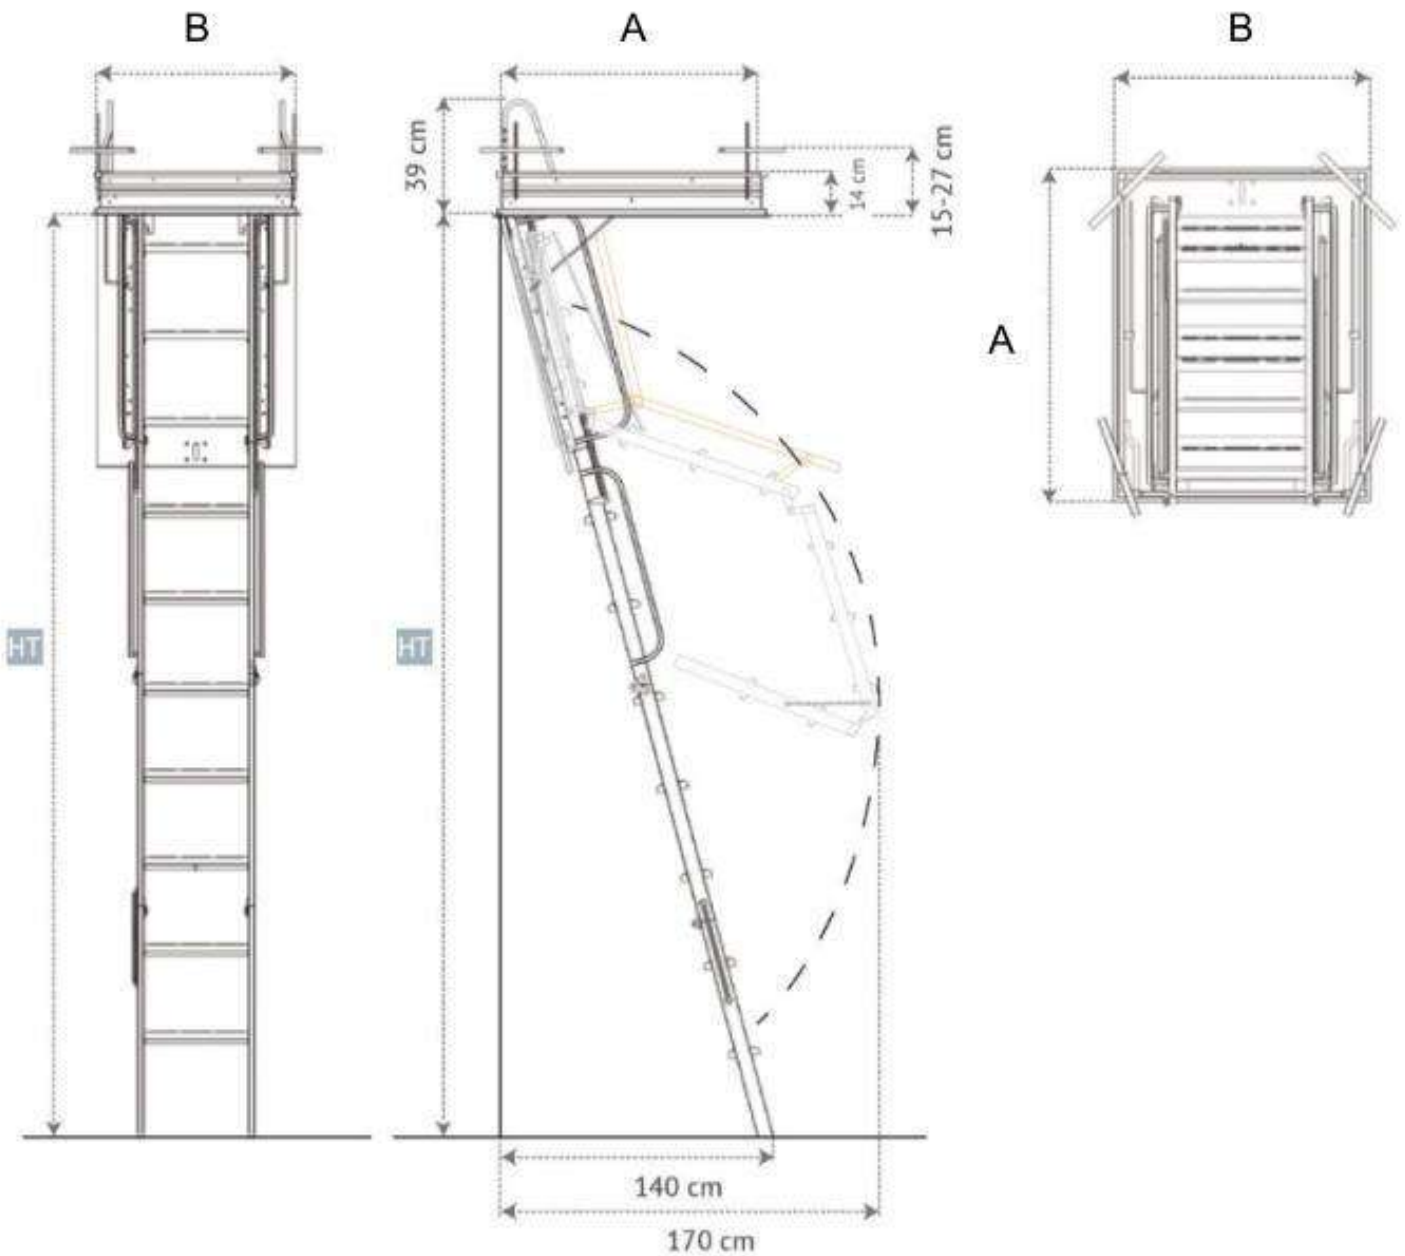

Telaio - Box - Caisson - Marco

Lamiere di acciaio zincato 10/10 con angolari di rinforzo 12/10.
 10/10 galvanised steel sheet with 12/10 reinforcement angle brackets.
 Tôle en acier galvanisé 10/10 avec cornières de renfort 12/10.
 Chapa de acero galvanizado 10/10 con angulares de refuerzo 12/10.



Gancio di apertura e asta di manovra
 Opening latch and operating pole
 Crochet d'ouverture et tige de manœuvre
 Gancho de apertura y asta de maniobra