



INTEGRA

- Working for your comfort -

Official Agent - Distributor
After Sale Service



Energy Storage Solutions

www.integragreenenergy.com



This is to certify that
Integra S.r.l.
Is a **Authorized Distributor**

in the scope of
Inverter and Batteries

in the territory of
Italy

The certificate is valid until Sept. 1st, 2025

A handwritten signature in black ink, appearing to be "INVT" followed by a stylized flourish.

INVT Solar Technology (Shenzhen) Co., Ltd.

INVT Solar Introduction

INVT Solar Technology (Shenzhen) Co., Ltd.

www.invt.com

Achieve Customers | Performance Orientation | Open and Win-Win | Striving for Innovation

PART

01

Company Introduction

Company Profile	01
INVT Honor	03
INVT History	05

PART

02

Energy Storage Solution

XD3-6KTL(Single Phase)	09
XD3-6KTL-AIO	11
XD6-10KTL(Single Phase)	13
XD6-12KTR(Three Phase)	15
XD30-60KTR(Three Phase)	17
GRP5.12-WLV	19
GRP5.12-SLV	21
GRP2.56-SHV	23

PART

03

EV Charging Solution

AC Wallbox Home-EU	27
AC Wallbox Home-US	29
AC Wallbox Commercial	31
DC Fast	33

PART

04

Off-Grid PV Solution

XN3024(Single Phase)	37
XN5548 & XN5548-P(Single Phase)	39

PART

05

Accessory

Accessory	41
Monitoring Solution	43
R&D Innovation	45
Marketing&Service Network	46
Applications	47

CONTENTS



ABOUT US

INVT (Shenzhen INVT Electric Co.,Ltd) was established in 2002, and is the first A-share listed company (Stock code: SZ 002334) in Shenzhen Stock Exchange in the industry. Our business covers industry automation, electric vehicle, network power. INVT owns 15 subsidiaries and more than 4500 employees.

INVT Solar (INVT Solar Technology (Shenzhen) Co.,Ltd.), is a professional solar inverters manufacturer and national high-tech enterprise. Founded in 2015, it is a wholly-owned subsidiary of INVT. It mainly offers PV inverter solutions and energy storage systems for commercial & industrial, and residential applications. Relying on INVT's strong 22-year of operating strength, INVT Solar has great advantages in R&D, production, sales and service, can provide all-round support to customers. Now our inverters are used in power installations in over 100 countries. In the Low-Carbon Age, INVT Solar is committed to providing smart products and services to develop clean energy.

CORE INDUSTRY BASE



Shenzhen Guangming Scientific Industrial Park

The headquarter and incubator of new products and business R&D.



Shenzhen Fuyong Industrial Park

Core industry base and manufacturing center in South China.



Suzhou Industrial Park

Core industry base and R&D center in East China.

COMPANY PROFILE



■ INVT HONOR



INVT HISTORY



Energy Storage Solution



XD3-6KTL

Single Phase Hybrid Inverter



Residential



Efficient Higher Revenue

- Max. Efficiency 97.5%
- Max. PV Input Voltage 600V
- 150% Peak Output Power
- 2 MPP Trackers, 150% DC Input Oversizing
- Max. PV Input Current 16A, Compatible with High Power Modules



Intelligent Simple O&M

- IP66 Protection Degree: support outdoor installation
- Smart I-V Curve Diagnosis Function: locate PV string faults accurately and automatically detect faults
- DC & AC Type II SPD: prevent lightning damage
- Battery Reverse Connection Protection



Flexible Abundant Configuration


- Plug & Play, EPS Switching Under 10ms
- Compatible with Lead-acid and Lithium Batteries
- Supports multiple units in parallel
- AFCI Function (Optional): when an arc-fault is detected the inverter immediately stops operation

SPECIFICATION

	XD3KTL	XD3K6TL	XD4KTL	XD4K6TL	XD5KTL	XD6KTL
Input (PV)						
Max. PV Input Power	4.5kW	5.4kW	6kW	6.9kW	7.5kW	9kW
Max. PV Input Voltage	600V					
Start-up Voltage	100V					
Rated Voltage	360V					
MPPT Voltage Range	100V ~ 550V					
Number of MPP Trackers	2					
Number of String per MPPT	1 / 1					
Max. Current per MPPT	16A					
Max. Short Circuit Current per MPPT	24A					
Output (AC)						
Rated Output Power	3kVA	3.68kVA	4kVA	4.6kVA	5kVA	6kVA
Max. Output Power	3.3kVA	3.68kVA	4.4kVA	4.6kVA	5.5kVA	6kVA
Max. Output Current	15A	16A	20A	20.9A	22.7A	27.3A
Rated Voltage	230V					
Rated Frequency	50Hz / 60Hz					
THDi(@Rated Power)	< 3%					
Power Factor	0.8 leading ~ 0.8 lagging					
Output (EPS)						
Max. Output Power	3kVA	3.68kVA	4kVA	4.6kVA	5kVA	6kVA
Max. Output Current	15A	16A	20A	20.9A	22.7A	27.3A
Peak Output Power, Time	4.5kW,10s	5.5kW, 10s	6kW, 10s	6.9kW, 10s	7.5kW, 10s	7.5kW, 10s
Rated Voltage, Frequency	230V, 50Hz					
THDv (@Rated Power)	< 3%					
Switch Time	< 10ms					
Battery						
Battery Type	Lithium, Lead-acid					
Battery Voltage Range	40V ~ 60V					
Max. Charge / Discharge Current	100A					
Communication	CAN					
Efficiency						
Max. Efficiency	97.50%					
EU Efficiency	97.20%					
Battery Charge / Discharge Efficiency	95.00%					
Protection						
DC Switch	Yes					
DC Reverse Polarity Protection	Yes					
Anti-islanding Protection	Yes					
AC Short Circuit Protection	Yes					
Residual Current Monitoring	Yes					
Insulation Resistance Monitoring	Yes					
Ground Fault Monitoring	Yes					
Over Current / Voltage Protection	Yes					
Battery Soft Start Protection	Yes					
Surge Protection	Type II					
AFCI Protection	Optional					
Communication						
Display	LCD					
Communication	RS485 / CAN / WIFI / 4G / LAN / Bluetooth					
Standard Compliance						
Certification	IEC/EN 62109-1/2, IEC/EN 61000-6-1/3, IEC61727/IEC62116, EN50549, CEI0-21, C10/C11, VDE4105, VDE0126, G98/99, RD244, UNE217001, UNE217002, AS4777, NRS097-2-1					
General Data						
Dimension (W x H x D)	481 x 390 x 200 mm					
Weight	21.35 kg					
Operating Temperature Range	-30°C ~ +60°C					
Cooling Method	Natural					
Protection Degree	IP66					
Max. Operating Altitude	4000m					
Relative Humidity	0~100%					
Self-consumption	< 10W					
Topology	High Frequency Insolation (For battery)					

XD3-6KTL-AIO

Energy Storage System

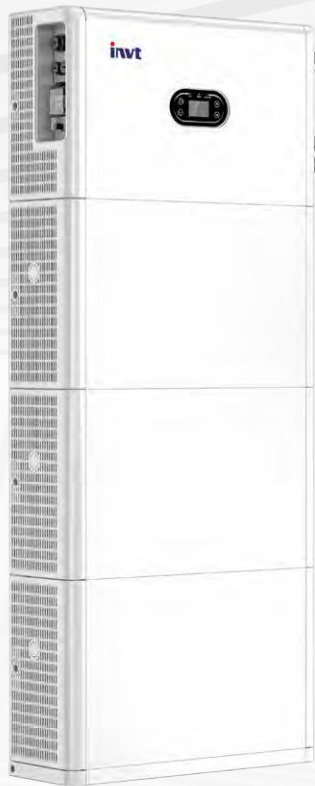

Efficient
Higher Revenue

- Max. efficiency 97.5%
- 2 MPP trackers, 160% DC input oversizing
- Max. charging/discharging current 100A for faster power backup
- Max. PV input current 16A, compatible with high-power modules



Reliable
Worry-Free

- DC & AC Type II SPD: prevent lightning damage
- High ingress protection rating of IP65: supports outdoor installation
- Smart I-V Curve Diagnosis Function: locate PV string faults accurately and automatically detect faults
- EPS Switching Under 10ms, UPS-level switching



Flexible
Abundant Configuration

- Easy-install, quick-stack design
- Modular design allows for scalability and customization
- Multiple working modes and support parallel access to PV, batteries, normal loads, EV chargers, and grids
- Support RS485/CAN/WiFi/4G/LAN/Bluetooth optional: remote monitoring and operation via PC or mobile phones

SPECIFICATION

Technical Data			
System Schematic			

Input (Battery)			
Battery Type	LFP		
Battery Energy	5.12kWh	10.24kWh	15.36kWh
Number of Batteries	1	2	3
Dimension (W x H x D)	640 x 875 x 210 mm	640 x 1250 x 210 mm	640 x 1625 x 210 mm
Battery Voltage	51.2V		
Voltage Range	43.2V ~ 56.16V		
Max. Charging / Discharging Current	100A		

Inverter Module	XD3KTL-AIO	XD3K6TL-AIO	XD4KTL-AIO	XD4K6TL-AIO	XD5KTL-AIO	XD6KTL-AIO
-----------------	------------	-------------	------------	-------------	------------	------------

Input (PV)						
Max. PV Input Power	4.5kW	5.4kW	6kW	6.9kW	7.5kW	9kW
Max. PV Input Voltage	600V					
Start-up Voltage	100V					
MPPT Voltage Range	100V ~ 550V					
Number of MPP Trackers / String per MPPT	2 / 1					
Max. PV Input Current	16A					
Max. Short Circuit Current per MPPT	24A					

Output (AC)						
Rated Output Power	3kW	3.68kW	4kW	4.6kW	5kW	6kW
Max. Output Power	3.3kVA	3.68kVA	4.4kVA	4.6kVA	5.5kVA	6kVA
Max. Output Current	15A	16A	20A	20.9A	22.7A	26.1A
Rated Voltage	230V					
Rated Frequency	50Hz / 60Hz					
THDi(@Rated Power)	< 3%					
Power Factor	0.8 leading ~ 0.8 lagging					

Output (EPS)						
Max. Output Power	3kVA	3.68kVA	4kVA	4.6kVA	5kVA	6kVA
Max. Output Current	15A	16A	20A	20.9A	22.7A	30A
Peak Output Power, Time	4.5kW, 10s	5.5kW, 10s	6kW, 10s	6.9kW, 10s	7.5kW, 10s	7.5kW,10s
Rated Voltage, Frequency	230V, 50Hz					
THDv(@Rated Power)	< 3%					
Switch Time	< 10ms					

Efficiency						
Max. Efficiency	97.50%					
EU Efficiency	97.20%					
Max. Battery Charge/Discharge Efficiency	95.00%					

Protection						
Protection	DC Reverse Polarity Protection, Insulation Resistance Monitoring, Ground Fault Monitoring, Over Current / Over Voltage Protection, Battery Soft Start Protection					
AFCI Protection	Optional					
Surge Protection	Type II					

General Data						
Operating Temperature Range	-10°C~ +45°C					
Self-consumption	< 10W					
Protection Degree	IP65					
Relative Humidity	0 ~ 100%					
Display	LCD					
Communication	RS485 / CAN / WIFI / 4G / LAN / Bluetooth					
Max. Operating Altitude	4000m					
Cooling Method	Natural					

XD6-10KTL

Single Phase Hybrid Inverter



Efficient
Higher Revenue

- Max. Efficiency 98%
- 2 MPP Trackers, 160% DC Input Oversizing
- Max. PV Input Current 20A, Compatible with High Power Modules
- 200% Peak Output Power at EPS Mode



Intelligent
Simple O&M

- IP66 Protection Degree
- SPD Type II: DC & AC
- Support AFCI Function (Optional)
- Support Smart I-V Curve Diagnosis Function



Flexible
Abundant Configuration

- EPS Switching Time <10ms
- Compatible With Lithium & Lead-acid Battery
- Support Work in Parallel Mode
- Support Diesel generator & Smart Load Connection

SPECIFICATION

	XD6KTL1	XD7KTL	XD8KTL	XD10KTL
Input (PV)				
Max. PV Input Power	9kW	11.2kW	12.8kW	16kW
Max. PV Input Voltage	600V			
Start-up Voltage	100V			
MPPT Voltage Range	100V ~ 550V			
Number of MPP Trackers	2			
Number of Strings per MPPT	2 / 1			
Max. PV Input Current	40A / 20A			
Output (AC)				
Rated Output Power	6kW	7kW	8kW	10kW
Max. Output Active Power	6.6kW	7.7kW	8.8kW	11kW
Max. Output Current	30A	35A	40A	50A
Rated Voltage	230V			
Rated Frequency	50Hz / 60Hz			
THDi(@Rated Power)	< 3%			
Power Factor	0.8 leading ~ 0.8 lagging			
Battery				
Battery Type	Lithium, Lead-acid			
Battery Voltage Range	40V ~ 60V			
Max. Charge/Discharge Current	150A	160A	190A	210A
Output (EPS)				
Max. Output Power	6.6kVA	7.7kVA	8.8kVA	11kVA
Max. Output Current	30A	35A	40A	50A
Peak Output Power, Time	12kW,10s	14kW,10s	16kW,10s	20kW,10s
Rated Voltage	230V			
THDv(@Rated Power)	< 3%			
Switch Time	< 10ms			
Efficiency				
Max. Efficiency	98.00%			
European Efficiency	97.50%			
Battery Charge / Discharge Efficiency	97.00%			
Protection				
DC Reverse Polarity Protection	Yes			
Insulation Resistance Monitoring	Yes			
Ground Fault Monitoring	Yes			
Over Current / Over Voltage Protection	Yes			
Battery Soft Start Protection	Yes			
AFCI Protection	Optional			
Surge Protection	Type II			
Communication				
Display	LCD			
Communication	RS485 / CAN / WIFI / 4G / Bluetooth			
General Data				
Dimension (W x H x D)	440mm*530mm*250mm			
Operating Temperature Range	-30°C ~ +60°C			
Self-consumption	< 10W			
Topology	High Frequency Insolation (For Battery)			
Protection Degree	IP66			
Relative Humidity	0~100%			
Max. Operating Altitude	4000m			
Cooling Method	Smart Forced Air Cooling			

XD6-12KTR

Three Phase Hybrid Inverter



Efficient Higher Revenue

- 160% DC input oversizing, Max. PV input current 20A
- Max. charge/discharge current 50A
- 110% output power oversizing, 200% peak output power



Intelligent Simple O&M

- Smart I-V Curve Diagnosis Function: locate PV string faults accurately and automatically detect faults
- IP66 protection: support outdoor installation
- DC & AC type II SPD: prevent lightning damage



Flexible Abundant Configuration

- Plug & play, EPS switching under 10ms
- AFCI function (optional): when an arc-fault is detected the inverter immediately stops operation
- Multiple working modes

SPECIFICATION

	XD6KTR	XD8KTR	XD10KTR	XD12KTR
Input (PV)				
Max. Input Power	9.6kW	12.8kW	16kW	19.2kW
Max. Input Voltage	1100V			
Start-up Voltage	160V			
Rated Voltage	600V			
MPPT Voltage Range	150V~1000V			
Number of MPP Trackers	2			
Number of String per MPPT	1 / 1			
Max. Current per MPPT	20A			
Max. Short Circuit Current per MPPT	40A			
Output (AC)				
Rated Output Power	6kVA	8kVA	10kVA	12kVA
Max. Output Power	6.6kVA	8.8kVA	11kVA	13.2kVA
Max. Output Current	8.7A	11.6A	14.5A	17.4A
Rated Grid Voltage	230Vac / 400Vac			
Rated Grid Frequency	50Hz / 60Hz			
THDi(@Rated Power)	< 2%			
Power Factor	0.8 leading ~ 0.8 lagging			
Output (EPS)				
Max. Output Power	6.6kVA	8.8kVA	11kVA	13.2kVA
Peak Output Power, Time	12kW, 60s	16kW, 60s	20kW, 60s	20kW, 60s
Rated Voltage, Frequency	230V / 400V, 50Hz			
THDv(@Rated Power)	< 3%			
Switch Time	< 10ms			
Battery				
Battery Type	Lithium / Lead-acid			
Battery Voltage Range	120V ~ 600V			
Max. Charge / Discharge Current	50A			
Communication	CAN			
Efficiency				
Max. Efficiency	98.20%		98.40%	
European Efficiency	97.60%		97.80%	
Battery Charge / Discharge Efficiency	97.60%		97.80%	
Protection				
DC Switch	Yes			
DC Reverse Polarity Protection	Yes			
Anti-islanding Protection	Yes			
AC Short Circuit Protection	Yes			
Residual Current Monitoring	Yes			
Insulation Resistance Monitoring	Yes			
Ground Fault Monitoring	Yes			
Over Current / Voltage Protection	Yes			
I-V Curve Scan	Yes			
Battery Soft Start Protection	Yes			
Surge Protection	Type II			
AFCI Protection	Optional			
Communication				
Display	LCD			
Communication	RS485 / CAN / WIFI / 4G / LAN / Bluetooth			
General Data				
Dimension (W x H x D)	534 x 440 x 232 mm			
Weight	27kg			
Operating Temperature Range	-30°C~ +60°C			
Cooling Method	Natural			
Protection Degree	IP66			
Max. Operating Altitude	4000 m			
Relative Humidity	0~100%			
Self-consumption	< 10W			
Topology	Transformerless			

XD30-60KTR

Three Phase Hybrid Inverter



Efficient
Higher Revenue

- 4 MPP Trackers, 150% DC input oversizing
- Max. PV input current 20A, compatible with high power PV modules
- Max. charge/discharge current 200A, 150% EPS peak output power



Intelligent
Simple O&M

- IP66 protection
- DC&AC Type II SPD: prevent lightning damage
- Smart I-V curve diagnosis function: locate PV string faults accurately and automatically detect faults



Flexible
Abundant Configuration

- Support optional AFCI function
- EPS switching under 10ms
- Support multi-inverters in parallel
- Standard generator interface, support for generator and smart load access

	XD30KTR	XD40KTR	XD50KTR	XD60KTR
Input (PV)				
Max. Input Power	48000Wp	64000Wp	80000Wp	96000Wp
Max. Input Voltage	1100V			
Start-up Voltage	200V			
Rated Voltage	620V			
MPPT Voltage Range	180V-1000V			
Number of MPP Trackers	4			
Number of String per MPPT	8			
Max. Current per MPPT	4*40A			
Max. Short Circuit Current per MPPT	4*60A			
Output (On-Grid)				
Rated Output Power	30kW	40 kW	50 kW	60 kW
Max. Output Power	33kVA	44 kVA	55 kVA	66 kVA
Max. Output Current	50A	66.7 A	83.4 A	100 A
Max. Input Power from Grid	45kW	60 kW	75 kW	90 kW
Max. Input Current from Grid	68.4A	91 A	113.7A	136.4A
Rated Grid Voltage	3 / N / PE, 230 V / 400 Vac			
Rated Grid Frequency	50Hz / 60Hz			
THDi(@Rated Power)	<3%			
Power Factor	0.8 leading ~ 0.8 lagging			
Battery				
Battery Type	Lithium			
Battery Voltage Range	160V - 850V			
Max. Charge / Discharge Power	44kW		55kW	66kW
Max. Charge / Discharge Current	2*100A			
Communication	CAN / RS485			
Output (EPS)				
Rated Output Power	30kW	40kW	50kW	60kW
Max. Output Power	1.5 times / 10s			
Max. Output Current	45.6A	60.7 A	75.8 A	91 A
Switch Time	<10ms			
Rated Voltage	3 / N / PE, 230V / 400Vac			
Rated Frequency	50Hz / 60Hz			
Max. AC passthrough current	150A			
THDv (@linear load)	<2%			
Output (Generator)				
Max. Output Power	30kW	40kW	50kW	60kW
Max. Output Current	45.6A	60.7A	75.8A	91 A
Rated Voltage	3 / N / PE, 230V / 400Vac			
Rated Frequency	50Hz / 60Hz			
Efficiency				
Max. Efficiency	98.40%			
European Efficiency	97.50%			
Battery Charge / Discharge Efficiency	97.50%			
Protection				
Protection	DC Switch, DC Reverse Polarity Protection, Anti-islanding Protection, AC Short Circuit Protection, Residual Current Monitoring, Ground Fault Monitoring, Over Current /Voltage Protection, Battery Active Function, I-V Curve Scan			
Surge Protection	Type II			
AFCI Protection	Optional			
General Data				
Display	LCD / LED			
Dimension (W x H x D)	620 x 900 x 300 mm			
OperatingTemperature Range	-30 ~ +60°C			
Cooling Method	Smart Cooling			
Protection Degree	IP66			
Max, Operating Altitude	4000m			
Relative Humidity	0~95%			
Self-consumption	<15W			
Topology	Transformerless			

GRP5.12-WLV

Low Voltage Wall-mounted Battery



Easy Install

- Easy installation, plug and play design



Flexible

- Flexible capacity, Max.15pcs in parallel to extend capacity



Reliable

- Safe & reliable, Lithium Iron Phosphate (LFP) Cell



Smart O&M

- LED Display, SOC, Battery state

	GRP5.12-WLV
Battery Parameter	
Battery Cell	LiFePO ₄
Battery Energy	5120Wh
Nominal Capacity	100Ah
Depth of Discharge	80%
Nominal Voltage	51.2V
Voltage Range	43.2Vdc ~ 56.6Vdc
Nominal Charge / Discharge Current	50A
Max. Charge/Discharge Current	100A
Dimension (W x H x D)	520 x 470 x 141.5 mm
Weight	47.2kg
Installation	Wall-mounted / Floor-standing
Temperature of Charge	0 ~ 55°C
Temperature of Discharge	-20°C ~ +60°C
Protection Degree	IP65
Parallel Units	Up to 15
Communication Port	RS485, CAN
Display	LED
Operation Humidity	5% ~ 95%
Max. Operating Altitude	2000m
Cycle Life	6000@80% DOD, 25°C , 0.5C
Certification	CE, IEC, UN38.3, MSDS

GRP5.12-SLV

Low Voltage Stackable Battery



Easy Install

· Modular design, simplifies transport and installation



Wide TEMP

· Excellent temperature performance, temperature of discharge @-20°C ~ +60°C



Reliable

· Cobalt Free Lithium Iron Phosphate (LFP) Battery: maximum safety and life cycle



Flexible

· Capable of high-powered emergency-backup and Off-Grid function

	GRP5.12-S2LV	GRP5.12-S3LV	GRP5.12-S4LV
Battery Parameter			
Battery Cell	LiFePO ₄		
Battery System Capacity	10.24kWh	15.36kWh	20.48kWh
Module Number	2	3	4
Nominal Capacity	200Ah	300Ah	400Ah
Depth of Discharge	80%		
Nominal Voltage	51.2V		
Voltage Range	43.2Vdc ~ 56.16Vdc		
Nominal Charge / Discharge Current	100A		
Dimension (W x H x D)	640 x 890 x 200 mm	640 x 1255 x 200 mm	640 x 1620 x 200 mm
Weight	119kg	167kg	215kg
Installation	Stacked		
Temperature of Charge	0 ~ 55°C		
Temperature of Discharge	-20°C ~ +60°C		
Protection Degree	IP65		
Communication Port	RS485, CAN		
Display	LED		
Operation Humidity	5% ~ 95%		
Max. Operating Altitude	2000m		
Cycle Life	6000@80% DOD, 25°C , 0.5C		
Certification	CE, IEC, UN38.3, MSDS		

GRP2.56-SHV

High Voltage Stackable Battery



Easy Install

- Modular Design, simplifies transport and installation



Wide TEMP

- Excellent temperature performance, temperature of discharge @ -20°C ~ +60°C



Reliable

- LFP Battery: Maximum Safety, Life Cycle and Power




Flexible

- High-voltage LiFePO₄ battery solution, Single module is 51.2V 50Ah 2.56kWh, 3 to 10 layers recommended

	GRP2.56-S3HV	GRP2.56-S4HV	GRP2.56-S5HV	GRP2.56-S6HV	GRP2.56-S7HV	GRP2.56-S8HV	GRP2.56-S9HV	GRP2.56-S10HV
Battery Parameter								
Battery Cell	LiFePO ₄							
Battery System Capacity	7.68kWh	10.24kWh	12.8kWh	15.36kWh	17.92kWh	20.48kWh	23.04kWh	25.6kWh
Module number	3	4	5	6	7	8	9	10
Nominal Capacity	50Ah							
Depth of Discharge	90%							
Nominal Voltage	153.6V	204.8V	256V	307.2V	358.4V	409.6V	460.8V	512V
Voltage Range	129.6 ~ 168.48Vdc	172.8~224.64Vdc	216~280.8Vdc	259.2~336.96Vdc	302.4~393.12Vdc	345.6~449.28Vdc	388.8~505.44Vdc	432~561.6Vdc
Nominal Charge/Discharge Current	50A							
Dimension (W x H x D)	600 x 820 x 210 mm	600 x 980 x 210 mm	600 x 1140 x 210 mm	600 x 1300 x 210 mm	600 x 1460 x 210 mm	600 x 1620 x 210 mm	600 x 1780 x 210 mm	600 x 1940 x 210 mm
Weight	102.5kg	129kg	155.5kg	182kg	208.5kg	235kg	261.5kg	288kg
Installation	Stacked							
Temperature of Charge	0~55°C							
Temperature of Discharge	-20°C ~+60°C							
Protection Degree	IP65							
Communication Port	RS485, CAN							
Display	LED							
Operation Humidity	5~95%							
Max. Operating Altitude	2000m							
Cycle Life	6000@80% DOD,25°C ,0.5C							
Certification	CE, CB, UN38.3, MSDS							

EV Charging Solution

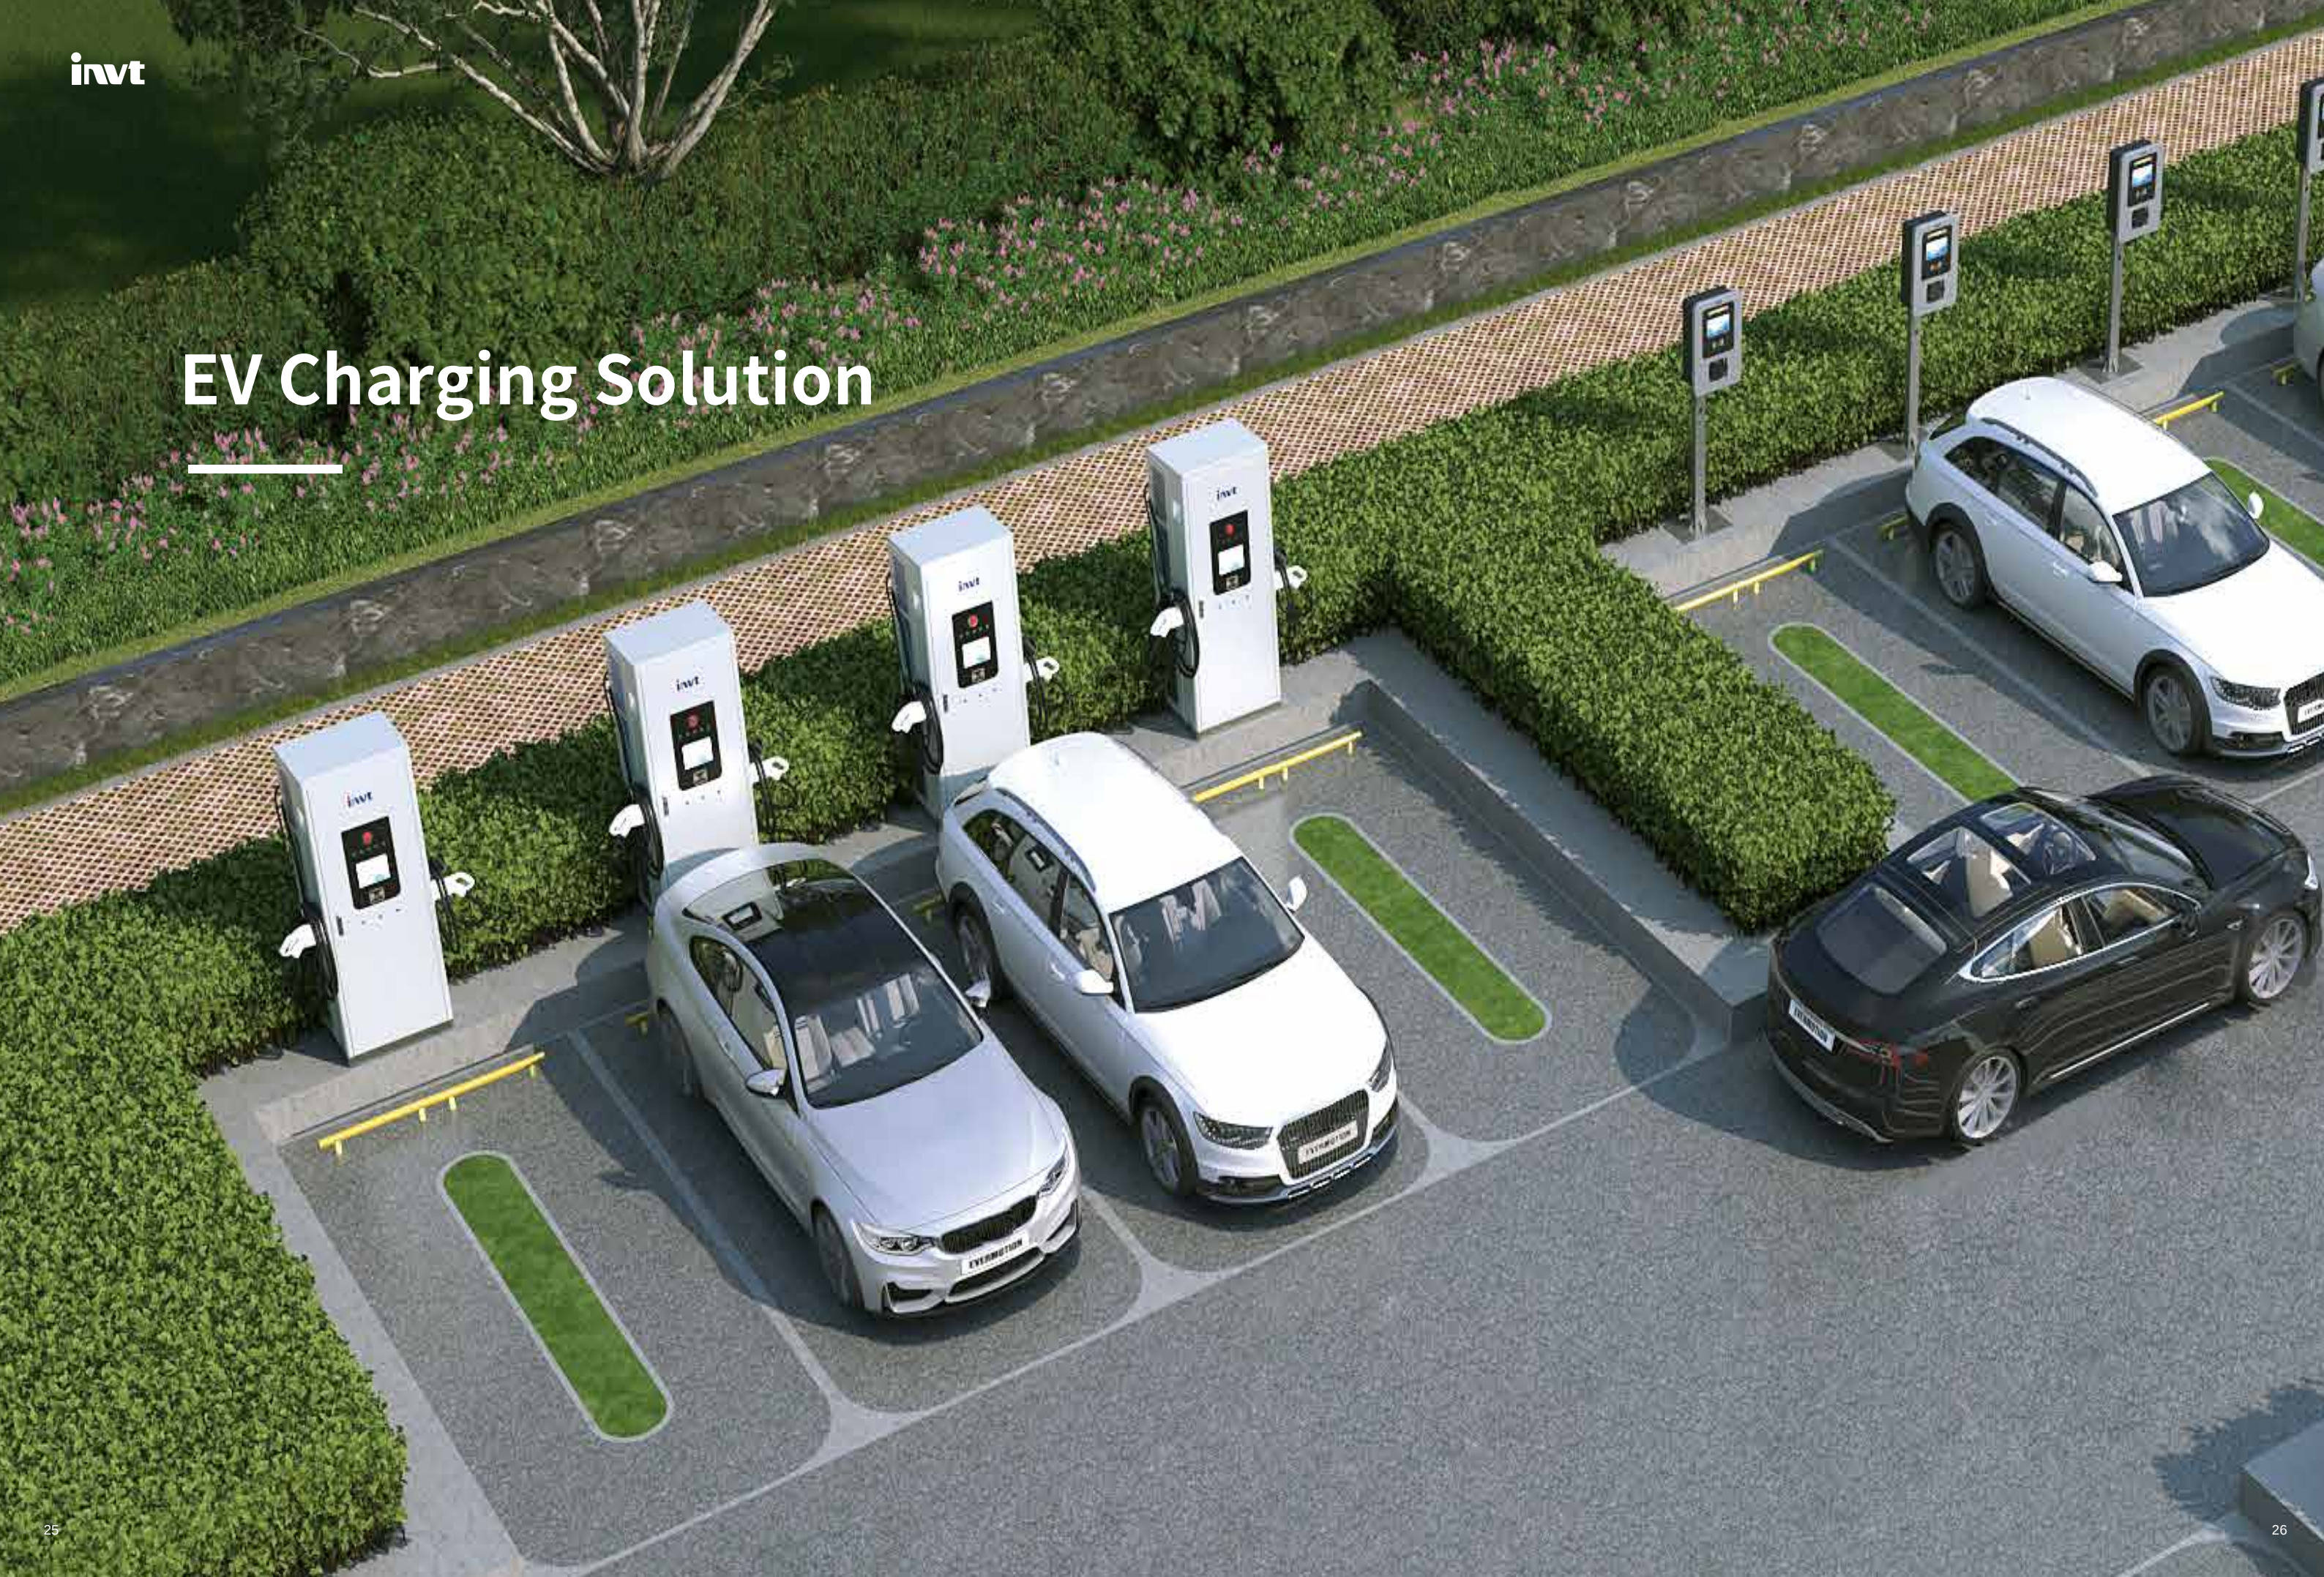

EVC16-AW7K/11K/22KGP1-UE

AC Wallbox Home-EU



Fast Charging

- Max. power up to 22kW
- Max. current up to 32A



Safe and Reliable

- IP54 rated
- Built-in residual current device(RCD)
- Type A+ 6mA DC leakage protection
- Multiple protection measures supported



Smart & Flexible

- DLB & ALM
- Integration with PV system
- Appointment activation
- Smart management with INVT EV Charging App



Easy to install

- Quick installation within 10 mins
- Easy maintenance



Convenient

- Remote firmware update & troubleshooting

	EVC16-AW7KGP1UE	EVC16-AW11KGP1UE	EVC16-AW22KGP1UE
Input & Output			
Input Voltage	230Vac±10% (L, N, PE)	400Vac±10% (L1, L2, L3, N, PE)	
Input Frequency	50Hz / 60Hz		
Output Voltage	AC230Vac±10%	AC400Vac±10%	AC400Vac±10%
Max. Output Power	7kW	11kW	22kW
Max. Output Current	≤ 32A	≤ 16A	≤ 32A
Charging Interface Standard	IEC / EN 62196 Series Type 2		
Connection Type	Plug		
Cable Length	4m		
Number of Charging Interface	1		
Protection			
Over Voltage Protection	Yes		
Under Voltage Protection	Yes		
Over Current Protection	Yes		
Short Circuit Protection	Yes		
Current Leakage Protection	Yes		
Over-temp Protection	Yes		
Ground-detect	Yes		
Function & Accessory			
Connectivity	WiFi		
User Authentication	RFIP / APP		
RCD	Type A (≤ 30mA)		
Communication Protocol	OCPP1.6J		
Start Time	3~8 s		
Efficiency	99.00%		
Power Factor	99.00%		
Emergency Stop Button	Yes		
Intelligent Power Distribution	Yes		
Working Environment			
IP Grade	IP54		
Operating Temperature	-25 °C~ +55 °C		
Storage Temperature	-40 °C~ +75 °C		
Relative Humidity	≤ 95% non-condensation		
Maximum Altitude	≤ 2000m		
Cooling Mode	Natural Cooling	Natural Cooling	Internal Fan Cooling
Standby Power Loss	≤ 5W		
Mechanical & Others			
Dimension (W x H x D)	230 x 375 x 115 mm (Wall mounting)		
Weight	3.5kg (Without bracket)	4kg (Without bracket)	5kg (Without bracket)
Enclosure Type	Plastic PC		
Certification	CE		



EVC16-AW7K/9K/11KGF1W(US)

AC Wallbox Home-US



Fast Charging

- Max. power up to 11kW
- Max. current up to 48A



Safe and Reliable

- NEMA 4X rated
- Built-in residual current device(RCD)
- 6mA AC & 30mA DC leakage protection
- Multiple protection measures supported



Smart & Flexible

- DLB & ALM
- Integration with PV system
- Appointment activation
- Smart management with INVT EV Charging App



Easy to Install

- Easy to install & maintain
- Autostart



Convenient

- Remote firmware update & troubleshooting

SPECIFICATION

	EVC16-AW7KGF1W(US)	EVC16-AW9KGF1W(US)	EVC16-AW11KGF1W(US)
Input & Output			
Charge Mode	Level 2		
Input Voltage	208Vac / 240Vac		
Input Frequency	50Hz / 60Hz		
Input Cord	NEMA 6-50P, NEMA 14-50P		Hardwired
Output Voltage	208Vac / 240Vac		
Max. Input Current	≤ 32A	≤ 40A	≤ 48A
Max. Output Power	7kW	9kW	11kW
Max. Output Current	≤ 32A	≤ 40A	≤ 48A
Charging Interface Standard	SAE J1772 AC Level 2 Type1		
Connection Type	Plug		
Cable Length	24.6 ft. (7.5m)		
Number of Charging Interface	1		
Protection			
Over Voltage Protection	Yes		
Under Voltage Protection	Yes		
Over Current Protection	Yes		
Short Circuit Protection	Yes		
Current Leakage Protection	Yes		
Over-temp Protection	Yes		
Ground-detect	Yes		
Surge Protection	Yes		
Function & Accessory			
Connectivity	WiFi / Bluetooth / Ethernet / RS485		
User Authentication	APP		
Ground Fault Detection	20mA CCID with auto retry		
Communication Protocol	OCPP1.6J		
Start Time	3~8 s		
Efficiency	99.00%		
Noise Level	≤ 45dB		
Energy Metering	Metering on board: ±5%		
Safety and Compliance	NEC Article 625 and UL 916, UL 2594, UL2231-1, UL2231-2, UL 1998, CSAC22.2.No.280		
Display	5LEDs+1 Charging breath circular LED		
Working Environment			
Enclosure Rating	NEMA 4X, indoor or outdoor installation		
Operating Temperature	-30 °C~ +55 °C		
Storage Temperature	-40 °C~ +75 °C		
Relative Humidity	≤ 95% non-condensation		
Maximum Altitude	≤ 2000m		
Cooling Mode	Natural Cooling		
Standby Power Loss	≤ 3.6W		
Mechanical & Others			
Dimension (W x H x D)	330 x 210 x 82 mm (Wall mounting)		
Weight	About 8kg (Gross weight)		
Enclosure Type	Plastic PC		
Certification	UL & FCC & ENERGY STAR		



EVC16-AW22KGP/TP1UE(MID)

AC Wallbox Commercial



Fast Charging

- Max. power up to 22kW
- Max. current up to 32A
- Type 2 charging cable optional



Safe and Reliable

- IP65 rated with metal housing design
- MID Certification
- Level 2 Charger, up to 50A charging current
- Multiple protection measures supported



Smart & Flexible

- DLB & ALM
- Smart management with EV charging App



Remote Control

- Remote firmware update & troubleshooting

SPECIFICATION

	EVC16-AW22KGP1UE(MID)	EVC16-AW22KTP1UE(MID)
Input & Output		
Input Voltage	400Vac±10% (L1, L2, L3, N, PE)	
Input Frequency	50Hz / 60Hz	
Output Voltage	400Vac±10%	
Max. Output Power	22kW	
Max. Output Current	≤ 32A	
Charging Interface Standard	IEC / EN 62196 Series Type 2	
Connection Type	Plug	Socket
Cable Length	5m	—
Number of Charging Interface	1	
Protection		
Over Voltage Protection	Yes	
Under Voltage Protection	Yes	
Over Current Protection	Yes	
Short Circuit Protection	Yes	
Current Leakage Protection	Yes	
Over-temp Protection	Yes	
Ground-detect	Yes	
Surge Protection	Yes	
Function & Accessory		
Connectivity	Internet access via 4G (optional) / Ethernet (RJ45)	
User Authentication	RFID	
RCD	Type A (≤ 30mA)	
Communication Protocol	OCPP1.6J	
Start Time	3~8 s	
Energy Meter	MID	
Display Screen	5 inch	
Noise Level	≤ 45dB	
Application	Indoor, Outdoor	
Efficiency	≥ 99.00%	
Power Factor	≥ 99.00%	
Emergency Stop Button	Yes	
Intelligent Power Distribution	Yes	
Working Environment		
IP Grade	IP65	
Operating Temperature	-30 °C~ +50 °C	
Storage Temperature	-40 °C~ +75 °C	
Relative Humidity	≤ 95% non-condensation	
Maximum Altitude	≤ 2000m	
Cooling Mode	Natural Cooling	
Standby Power Loss	≤ 5W	
Mechanical & Others		
Dimension (W x H x D)	336 x 187 x 85 mm	
Weight	8.5kg	
Enclosure Type	Galvanized plate SECC	
Certification	CE	



EVC16-DH60K/120K/180K7P3UE

DC Fast



Fast Charging

- Max. power up to 180kW
- Max. current up to 400A



Safe and Reliable

- IP55 rated
- Built-in residual current device(RCD)
- 30mA DC current leakage protection



Smart & Flexible

- DLB
- Integration with PV system



Easy to install

- Modular design
- Easy to upgrade and maintain



Remote Control

- Remote firmware update & troubleshooting

SPECIFICATION

	EVC16-DH60K7P3UE	EVC16-DH120K7P3UE	EVC16-DH180K7P3UE
Input & Output			
Input Voltage	260Vac~485Vac (L1, L2, L3, N, PE)		
Input Frequency	45Hz ~ 65Hz		
Max. Input Current	124A	216A	310A
Output Voltage (Vac)	CCS2: 200Vac to 1000Vac / Type 2: 400Vac (CHAdeMO: 150Vac to 500Vac Vdc optional)		
Max. Output Power	DC: 60kW / AC: 22kW	DC: 120kW / AC: 22kW	DC: 180kW / AC: 22kW
Max. Output Current	≤ 200A	≤ 200A*2	≤ 200A*2
Charging Interface Standard	IEC / EN 62196 Series CCS2 / Type 2		
Connection Type	Plug		
Cable Length	CCS2: 5m / Type 2: 4.5m		
Number of Charging Interface	3		
Protection			
Over Voltage Protection	Yes		
Under Voltage Protection	Yes		
Over Current Protection	Yes		
Short Circuit Protection	Yes		
Current Leakage Protection	Yes		
Over-temp Protection	Yes		
Ground-detect	Yes		
Surge Protection	Yes		
Insulation Monitor	Yes		
Function & Accessory			
Connectivity	Internet access via 4G (optional) / Ethernet (RJ45)		
User Authentication	QR code / RFIP		
RCD	Type A (≤ 30mA)		
User Interface	7.0-inch IPS-TFT-LCD Touchscreen		
Communication Protocol	OCPP1.6J		
Cable Retraction System	Optional		
Energy Metering	Class A (DC), Class B (AC) DC meter PTB certificated optional AC meter MID, PTB certificated optional		
Power Factor	≥ 99.00%		
Start Time	3~8 s		
Efficiency	≥ 96.00%		
RFID Reader	ISO14443 Type A, MIFARE® ONE (MF1) Card		
Emergency Stop Button	Yes		
Intelligent Power Distribution	Yes		
Working Environment			
IP Grade	IP55 outdoor use and IK-10		
Operating Temperature	-25 °C~ +45 °C		
Storage Temperature	-40 °C~ +75 °C		
Relative Humidity	≤ 95% non-condensation		
Maximum Altitude	< 2000m (2000m to 5000m with power derating)		
Cooling Mode	Intelligent fan cooling		
Noise Level	≤ 70dB		
Mechanical & Others			
Dimension (W x H x D)	550 x 750 x 1840 mm		
Weight	About 250kg	About 280kg	About 320kg
Enclosure Type	Galvanized plate SECC		
Certification	CE		

Off-Grid PV Solution





XN3024

Single Phase Off-Grid Solar Inverter



Efficient Higher Revenue

- Built-in 80A MPPT solar charge
- Wide PV input voltage range



Intelligent Simple O&M

- Support cold start
- Intelligent fan speed adjustment
- Over load / over temperature / short circuit protection
- Smart battery charger design, optimize battery performance



Flexible Abundant Configuration

- Support grid / generator input
- Compatible with lithium battery
- Multiple charging voltage levels for different batteries
- Multiple work mode, support AC priority, solar priority

SPECIFICATION

	XN3024
Rated Power	3200VA/3000W
Input	
Voltage	230Vac
Selectable Voltage Range	170Vac~280Vac (for personal computers) 90Vac~280Vac (for home appliances)
Frequency Range	50Hz / 60Hz (auto sensing)
Output	
AC Voltage Regulation (Batt. Mode)	230Vac±5%
Surge Power	6400VA
Overload Capability	5s@ ≥ 150% load; 10s@110%~150% load
Efficiency (Peak)	94%
Transfer Time	10ms (for personal computers); 20ms (for home appliances)
Waveform	Pure Sine Wave
Battery	
Battery Nominal Voltage	24Vdc
Floatingg Charge Voltage	27Vdc
Overcharge Protection	31Vdc
Solar Charger & AC Charge	
Solar Charger Type	MPPT
Maximum PV Array Power	3000W
Solar Charger Type	240Vdc
MPPT Range	90Vdc ~ 430Vdc
Maximum PV Array Open Circuit Voltage	450Vdc
Maximum Utility Charge Current	60A
Maximum Solar Charge Current	80A
Protection	
Protection	AC Short Circuit Protection, AC Over Current Protection, Over TemperatureProtection, etc.
Communication	
Display	LCD
Communication Port	RS232
Standard Compliance	
Safety/ EMC	CE
General Data	
Dimension (W x H x D)	282 x 348 x 105 mm
Net Weight	5.5kg
Protect Degree	IP21
Operating Temperature	0° C ~ +55° C
Storage Temperature	-15° C ~ +60° C
Humidity	5%~95% (non-condensing)



XN5548 & XN5548-P

Single Phase Off-Grid Solar Inverter



Efficient Higher Revenue

- Built-in 110A MPPT solar charge
- Wide PV input voltage range



Intelligent Simple O&M

- Over load / over temperature / short circuit protection
- Smart battery charger design, optimize battery performance



Flexible Abundant Configuration

- Support grid / generator input
- Compatible with lithium battery
- Up to 6 units in parallel (P model)
- Multiple charging voltage levels for different batteries
- Multiple work mode, support AC priority, solar priority

SPECIFICATION

	XN5548	XN5548-P
Rated Power	5500VA/5500W	
Input		
Voltage	230Vac	
Selectable Voltage Range	170Vac~280Vac (for personal computers) 90Vac~280Vac (for home appliances)	
Frequency Range	50Hz / 60Hz (auto sensing)	
Output		
AC Voltage Regulation (Batt. Mode)	230Vac±5%	
Surge Power	11000VA	
Overload Capability	5s@ ≥ 150% load; 10s@110%~150% load	
Efficiency (Peak)	94%	
Transfer Time	10ms (for personal computers); 20ms (for home appliances)	
Waveform	Pure Sine Wave	
Battery		
Battery Nominal Voltage	48Vdc	
Floatingg Charge Voltage	52Vdc	
Overcharge Protection	62Vdc	
Solar Charger & AC Charge		
Solar Charger Type	MPPT	
Maximum PV Array Power	6000W	
MPPT Range	120Vdc~450Vdc	
Maximum PV Array Open Circuit Voltage	500Vdc	
Maximum Utility Charge Current	80A	
Maximum Solar Charge Current	110A	
Protection		
Protection	AC Short Circuit Protection, AC Over Current Protection, Over Temperature Protection, etc.	
Communication		
Display	LCD	
Communication Port	RS232 / RS485	
Standard Compliance		
Safety/ EMC	CE	
General Data		
Dimension (W x H x D)	297 x 472 x 133 mm	
Net Weight	10.5kg	
Protect Degree	IP21	
Operating Temperature	0° C ~ +55° C	
Storage Temperature	-15° C ~ +60° C	
Humidity	5%~95% (non-condensing)	
Parallel	No	Up to 6 pcs

STICK LOGGER

WiFi / Ethernet / Energy Meter



Plug and play

No extra power supply is required.



Independent module

Protecting internal parts of inverter.



Waterproof design

Resistant to bad weather.



External design

External indicator lights,ensuring collection status at a glance, easy to replace faulty equipment.

	LS4G-5	LS4G-4	LSW-5	LSE-3
Remote Communication Interface	4G	4G	2.4G WiFi	LAN
GNSS	<20m	—	—	—
Antenna	Internal Antenna	External Antenna	Internal Antenna	—
Data Interface	RS485 / RS232 / TTL			
Working Voltage	DC 5-12V			
Working Power	3.5W	3.5W	1.5W	1W
SIM Card	Chip Card / MicroSIM		—	—
Memory	8M Flash	8M Flash	8M Flash	2M Flash
Working Temperature	—40°C~ +85°C			
Working Humidity	< 90% (No Condensation)			
No. of Connections	One			
Serial Communication Rate	9600bps (1200—115200bps Configurable)			
Data Acquisition Interval	Default: 5 mins (1-15 mins Configurable)			
User Configuration	BT / APP	APP	BT / APP / Web	Web / APP
Firmware Upgrade	BT / Remote	Remote	BT / Remote / Web	Remote / Web
Real-time Control	√			
Data Resuming	√			
Power-off Reminder	√	√	√	—

DIN-RAIL LOGGER

WiFi / Ethernet / Energy Meter



Standard DIN-Rail Mount

Suitable for 35mm DIN-Rail mount.



Data Resuming

Ensure data integrity.



Remote Upgrade

Remote upgrade and system debugging, easy for O&M.





Alert Notification

Real-time alerts with timely notification,ensuring fast troubleshooting.

	LDW-1
Remote Communication Interface	WiFi
Working Frequency	2.142GHz ~ 2.484GHz
No.of Connections	1-10
Ethernet	10/100M (Adaptive Network)
Working Voltage	DC 4.7-15V
Working Power	1W
Local Communication	RS485/RS422/RS232
Serial Communication Rate	1200-115200bps Configurable
Data Uploading Interval	Default: 5 mins (1-15 mins Configurable)
Memory	2M Fash (512K-16M Optional)
User Configuration	AT+Instruction Set, Remote Server
SIM Card	-
Antenna	GPRS Small Antenna (Sucker Antenna Optional)
Working Temperature	-40°C ~ +85°C
Working Humidity	< 90% (non-condensation)
Dimension (W x H x D)	76 x 91 x18 mm
Installation Method	35mm DIN-Rail

Monitoring Solution

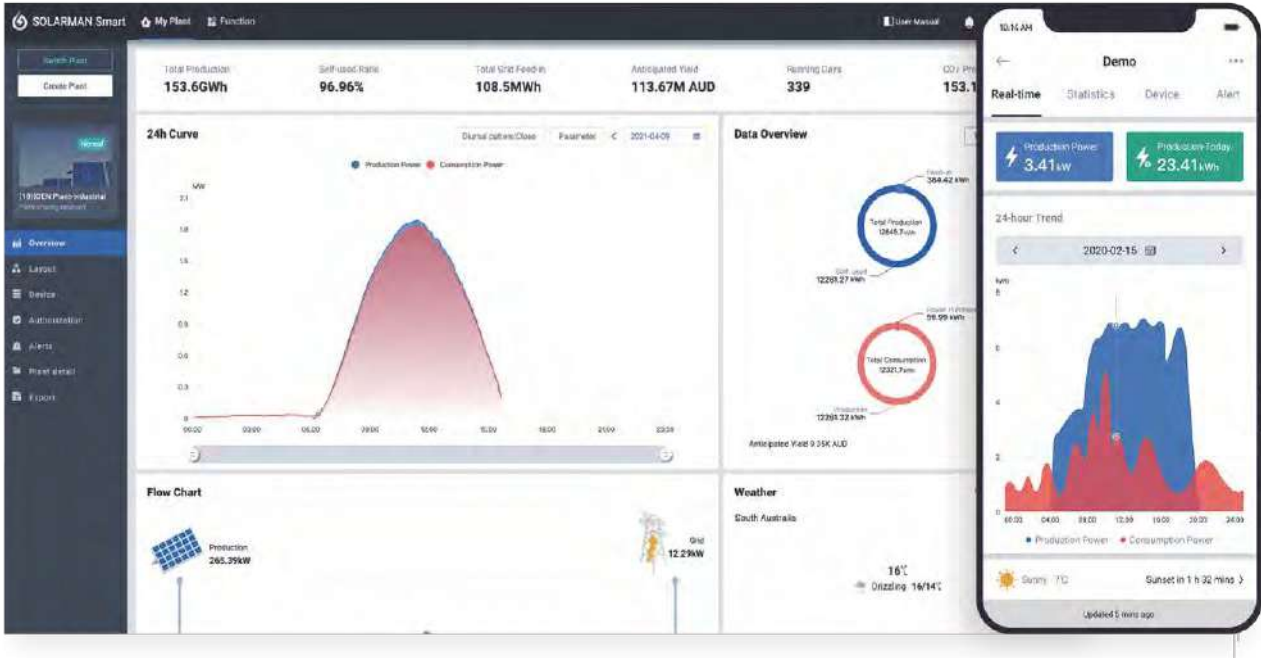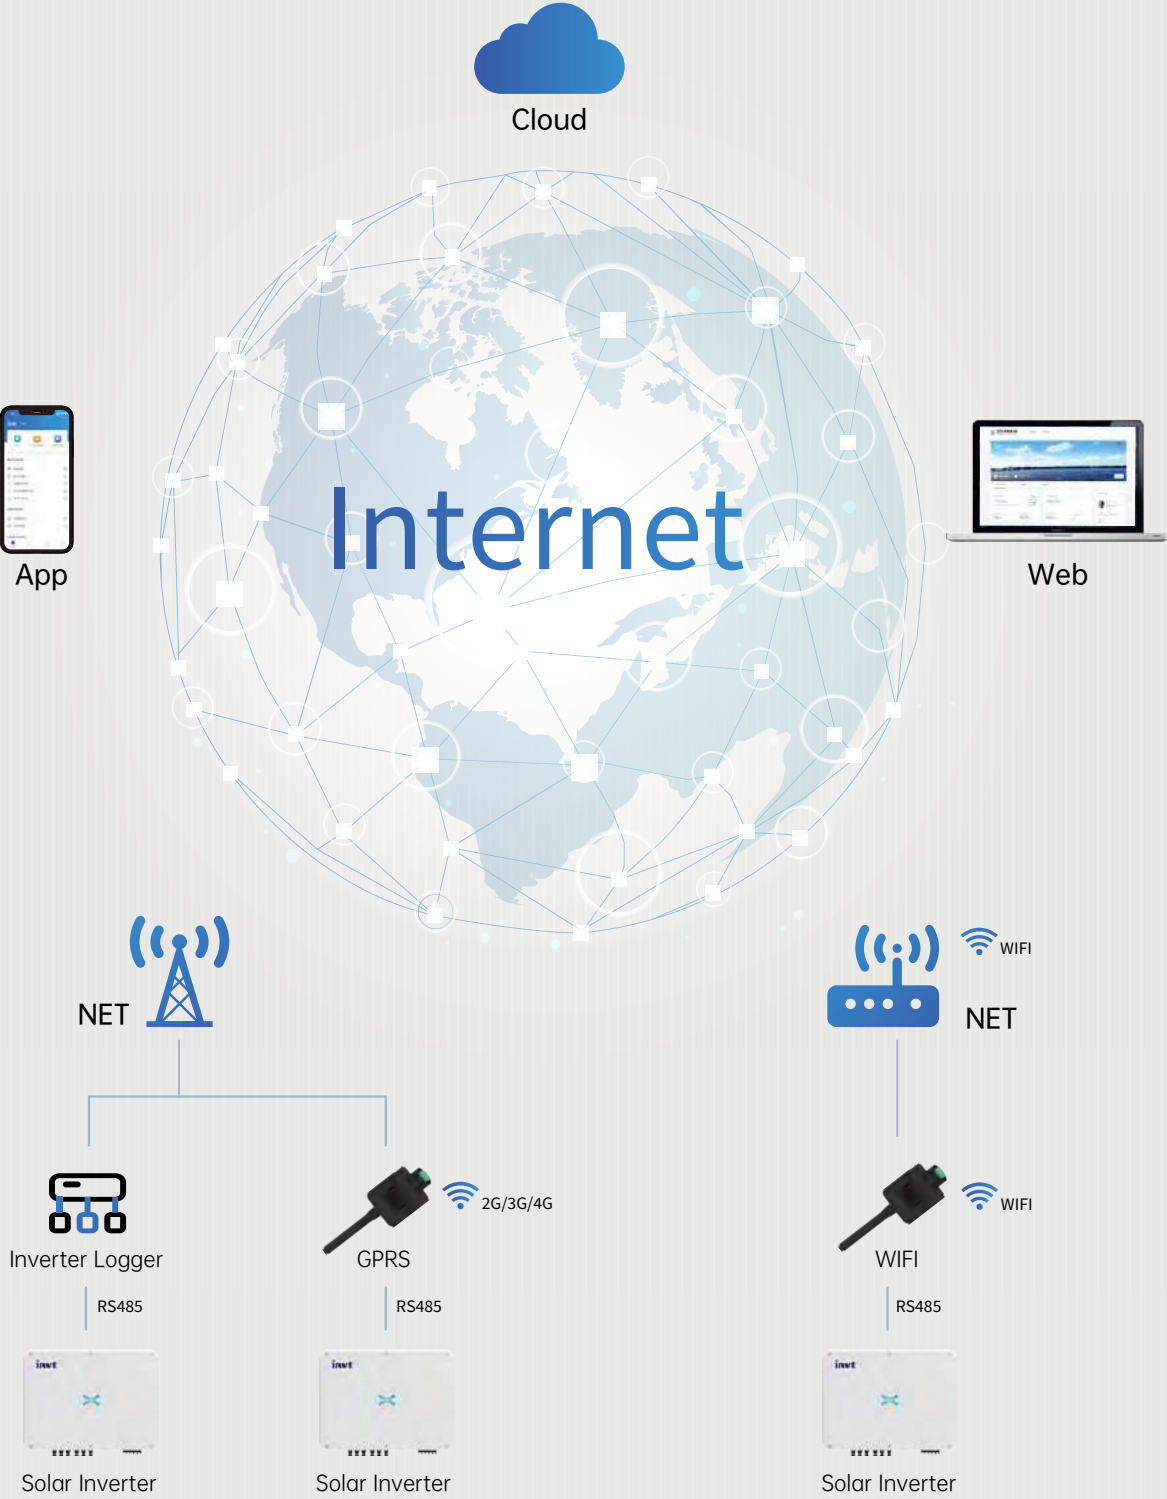

Monitoring Platform

SOLARMAN Business

PV Monitoring and Management Platform.

For Device Manufacturer:

- Device Control and Firmware Upgrade
- Data Processing
- Authorization Management
- Batch Task
- Device Classification

For Service Provider:

- Plentiful Information
- Intelligent AI Diagnosis
- Most Cost-effective Virtual Weather Station
- Simple Drag-and-Drop
- Intelligent and Intuitive Alerts

SOLARMAN Smart

A brand new smart energy management application, which is specially designed for global users.

Advantage:

- All-round Monitoring
- Create a Plant within 1 min
- Timely Alert Report
- Intuitive System Layout
- Flexible Plant Management




▲ For Business



▲ For Home

R&D INNOVATION

INVT regards research and development innovation as vitality of the company. In order to make the products and solutions of INVT more and more perfect, INVT builds the core competitiveness of the company and creates value for customers and society through strategic implementation such as independent innovation, operational excellence management and human resource development.



22years
Drive technology
development



35%
R&D staff



1530+
Patents



10%
Sales revenue
for R&D



7
Research
Centers




INVT Institute for
Industrial Automation
and Electric Power

Shenzhen Key Enterprise
Research Institute

MARKETING & SERVICE NETWORK

INVT global sales team provides customers with professional and efficient pre-sale, in sale and after-sale services, and enhances the added value of the brand with high-quality services.


Email: solar@invt.com.cn

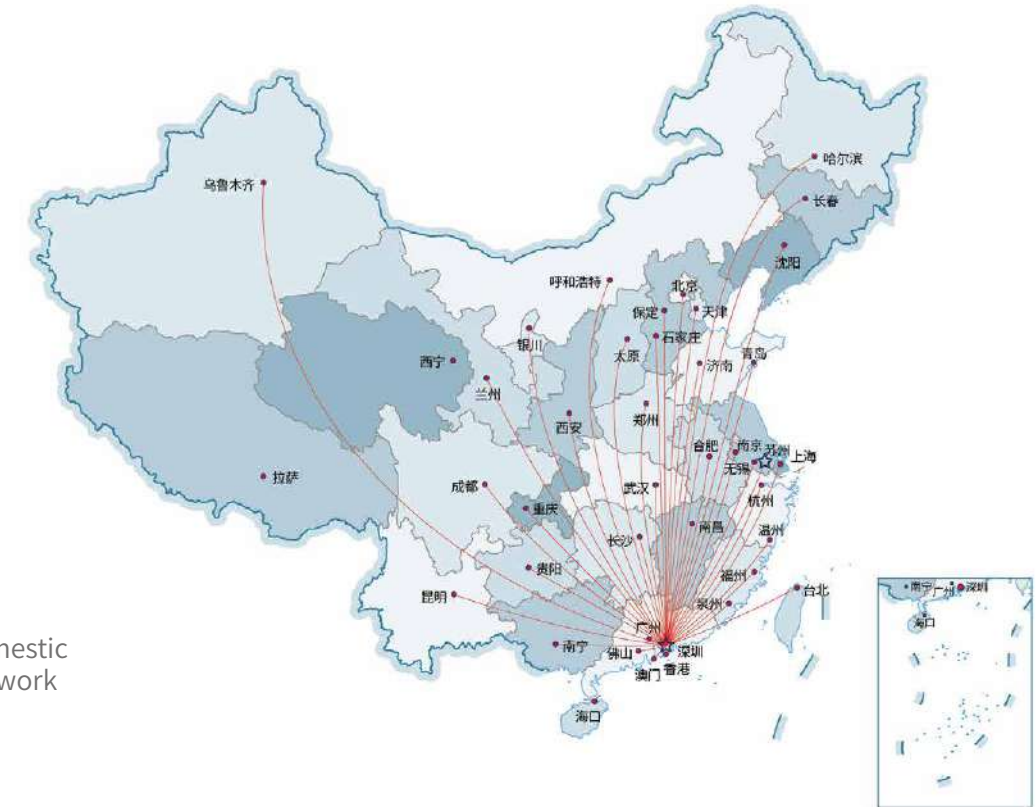

APPLICATION CASE



12kW, Philippines (XD6KTL*2)

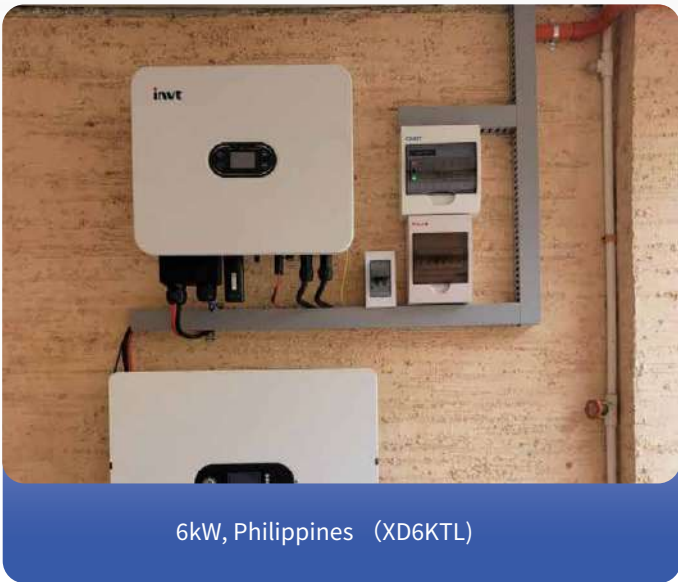

6kW, Philippines (XD6KTL)



6kW, Philippines (XD6KTL)


APPLICATION CASE




10kW, Slovakia (XD10KTR)



5kW, Malaysia (XD5KTL、GRP5.12-WLV)

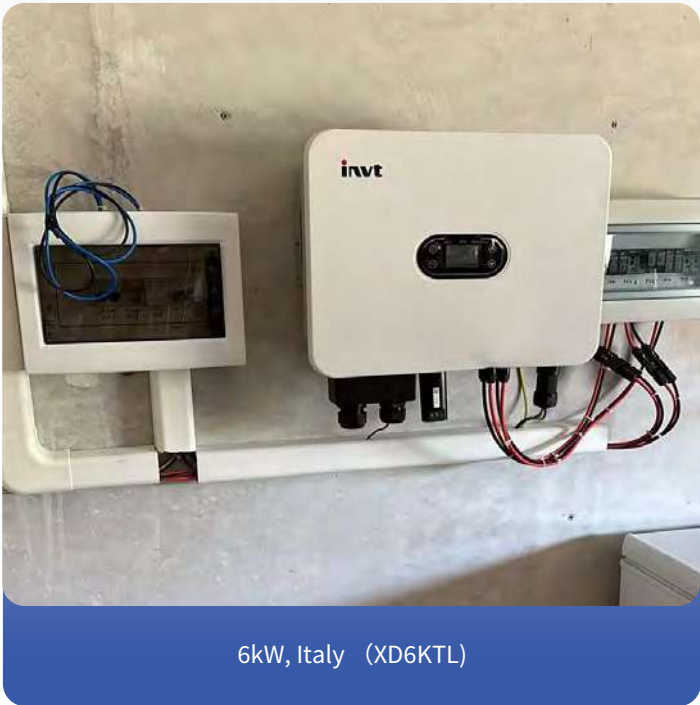

6kW, Italy (XD6KTL)

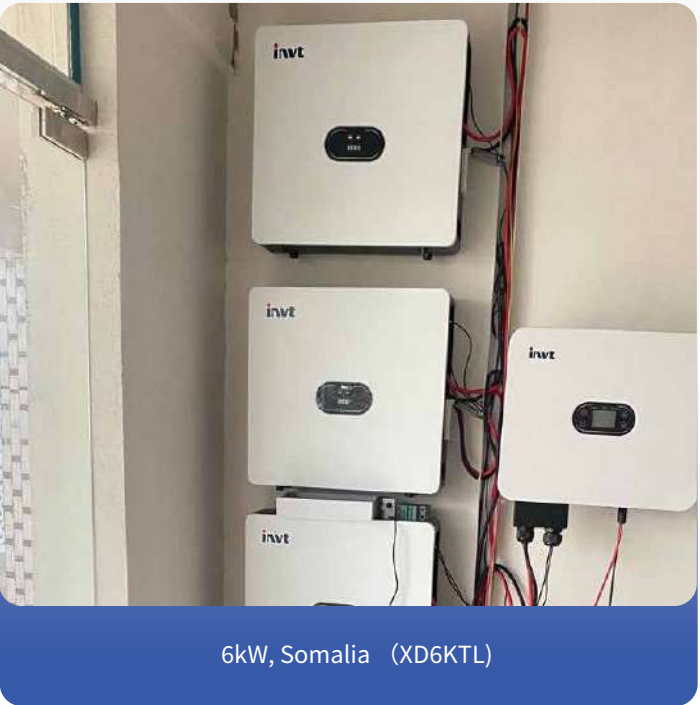

6kW, Somalia (XD6KTL)



INTEGRA srl - Via dei Sindacati, 1 - 01100 Viterbo (ITALY) - Tel. +39 0761 228400
info@integragreenenergy.com - www.integragreenenergy.com