

# COMPONENTS FOR TILING SHOWER TRAY CORNERS

**Nexiot Replast**  
C o n n e c t i o n T r u s t

## DESCRIPTION

3-layers waterproofing accessories with polyethylene internal core bonded on both sides with a textile.


## APPLICATION

Sealing for 3-layers waterproofing membrane junctions in critical points like corners.

## TECHNICAL DATA SHEET

### Material composition

Textile:	modified PP non-woven
Internal core:	flexible polymer
Colour	Light blue (other colours upon request)
Resistance to temperature (min./max.)	-30°C / + 90°C
Chemical resistance in the installed conditions	EN 1847 / EN 527-3
	Resistant to alkali and acids

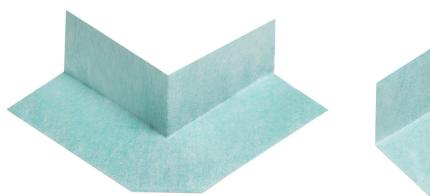

EC External corner

IC Internal corner

## DIMENSIONS

Side lenght	105 mm	120 mm	±3
Height	60 mm	60 mm	±3
Angle	90°	90°	
Overall membrane thickness	EN 1849-2	0,6 mm	0,6 mm ±0,15

**Storage:** cool and dry, protect against sunlight, use within 24 months after receipt.

**Attention:** due to technical reasons the colour of the material or the printing may vary slightly from batch to batch.

The above technical data represent average values. The technical information and application instructions are based on our current knowledge and expertise. However, it is the responsibility of each user to conduct trials with the original substrates in order to evaluate the suitability of our goods for the intended purpose, taking into consideration all application related parameters. If you have any further questions, please contact us.

## Nexiot Replast srl

Via Nazario Sauro58/A - 42021 Barco di Bibbiano - Reggio Emilia  
www.nexiot-replast.com - tecnico@nexiot-replast.com

Reg. Imprese, Cod. Fisc. e P.IVA IT02967710357 - Cap. Soc. € 20.000 - R.E.A. RE-328824 - Cod. Destinatario: XMXAUP4