

COMPONENTS FOR TILING

RECTANGULAR NICHES

DESCRIPTION

Prefabricated elements for the construction of niches, with sealing properties, that can be laid directly on tiles.


APPLICATION

Decorative element in bathrooms and Showers with the creation of a support surface in interior walls.

TECHNICAL DATA SHEET

Material composition

Coating (three-layer designed membrane)	flexible polymer coated by a modified PP non-woven		
Internal core (composite):	XPS		
Colour	Light blue (other colours upon request)		
Resistance to temperature (min./max.)	-30C° / + 90C°		
Chemical resistance in the installed conditions	EN 1847 / EN 527-3	Resistant to alkali and acids	

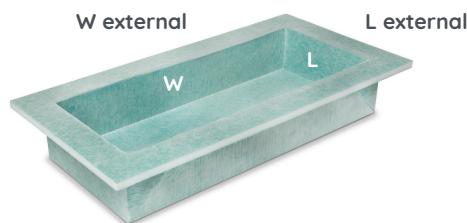

Nexi Rectangular Niche

DIMENSIONS

L/L external	20,32/30 cm	30,48/40 cm	30,48/40 cm	±3
W/W external	50,8/60 cm	50,8/60 cm	71,12/80 cm	±3
H	10 cm	10 cm	10 cm	±3
Thickness	12,7 mm	12,7 mm	12,7 mm	±3
Coating membrane thickness	EN 1849-2	0,6 mm	0,6 mm	±0,15

Storage: cool and dry, protect against sunlight, use within 24 months after receipt.

Attention: due to technical reasons the colour of the material or the printing may vary slightly from batch to batch.

The above technical data represent average values. The technical information and application instructions are based on our current knowledge and expertise. However, it is the responsibility of each user to conduct trials with the original substrates in order to evaluate the suitability of our goods for the intended purpose, taking into consideration all application related parameters. If you have any further questions, please contact us.

Nexiot Replast srl

Via Nazario Sauro 58/A - 42021 Barco di Bibbiano - Reggio Emilia

www.nexiot-replast.com - tecnico@nexiot-replast.com

Reg. Imprese, Cod. Fisc. e P.IVA IT02967710357 - Cap. Soc. € 20.000 - R.E.A. RE-328824 - Cod. Destinatario: XMxAUP4