

3510/2S2



SCHEDA TECNICA GRU


MOMENTO DI SOLLEVAMENTO	35 KNm
BRACCIO MAX. IDRAULICO	8,25 m
ALTEZZA MAX. IDRAULICA	10,55 m
ROTAZIONE IDRAULICA	270°
PENDENZA MAX. DI LAVORO	5°
VELOCITA' DI ROTAZIONE	30 sec.
PRESSIONE DI ESERCIZIO	240 bar
PORTATA OLIO POMPA	20 L/min
CAPACITA' SERBATOIO OLIO	20 Lt.
PESO GRU STANDARD	628 Kg

DATI, DESCRIZIONI E ILLUSTRAZIONI SONO INDICATIVE E NON IMPEGnano IL COSTRUTTORE


CRANE TECHNICAL SHEET

LIFTING MOMENT	35 KNm
MAXIMUM ARM HYDRAULIC REACH	8,25 m
MAXIMUM HEIGHT HYDRAULIC	10,55 m
HYDRAULIC ROTATION	270°
MAXIMUM SLOPE OF WORK	5°
ROTATION SPEED	30 sec.
OPERATING PRESSURE	240 bar
PUMP OIL FLOW	20 L/min
OIL TANK CAPACITY	20 Lt.
STANDARD CRANE WEIGHT	628 Kg

DATA, DESCRIPTIONS AND ILLUSTRATIONS ARE INDICATIVE AND DO NOT BIND THE MANUFACTURERS

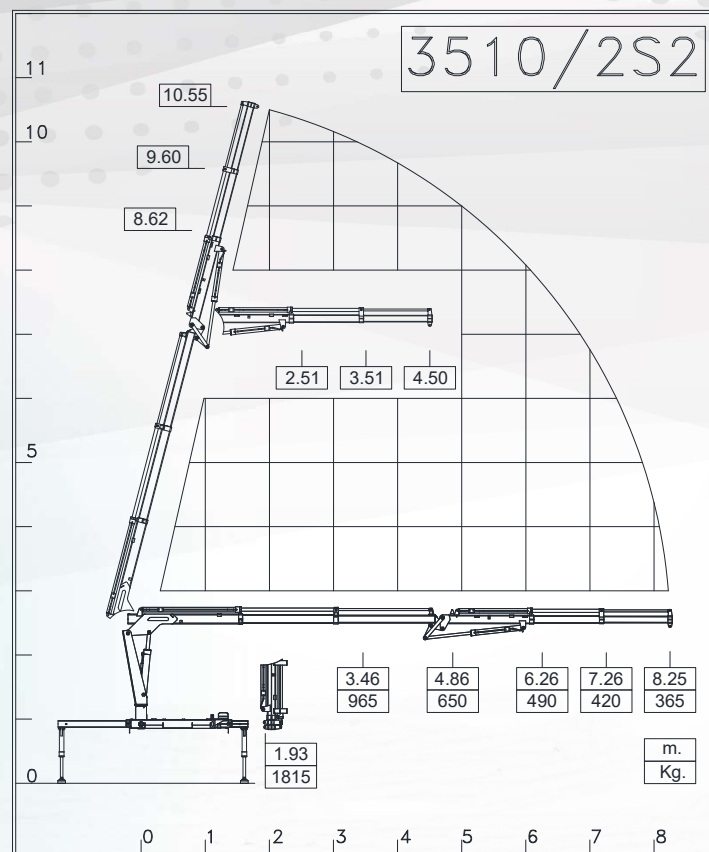

3510/2S2

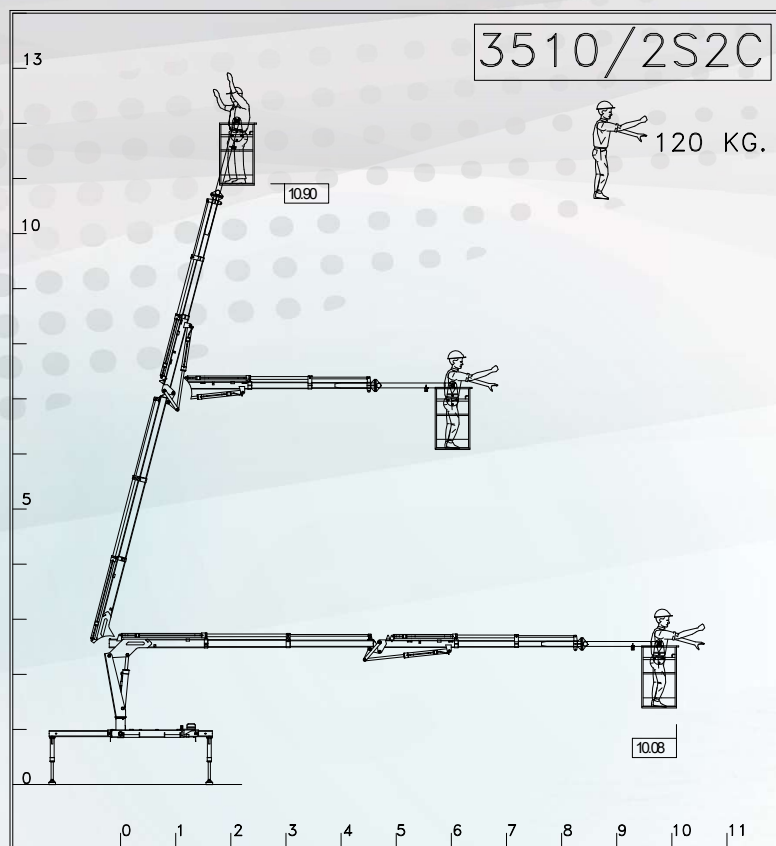

CARATTERISTICHE PLE

ALTEZZA MAX DI LAVORO	13,00 m
PORTATA MAX	120 kg. 1 P

DATE PLE

WORKING HEIGHT MAX	13,00 m
FLOW MAX	120 kg. 1 P

DIMENSIONI D'INGOMBRO

LARGHEZZA GRU	1942 mm
ALTEZZA GRU	1731 mm

DIMENSIONS

MAXIMUM WIDTH	1942 mm
HEIGHT CRANE	1731 mm

