


S.D.M. Apparecchi scientifici srl

Catalogue 2016 ver.1.4

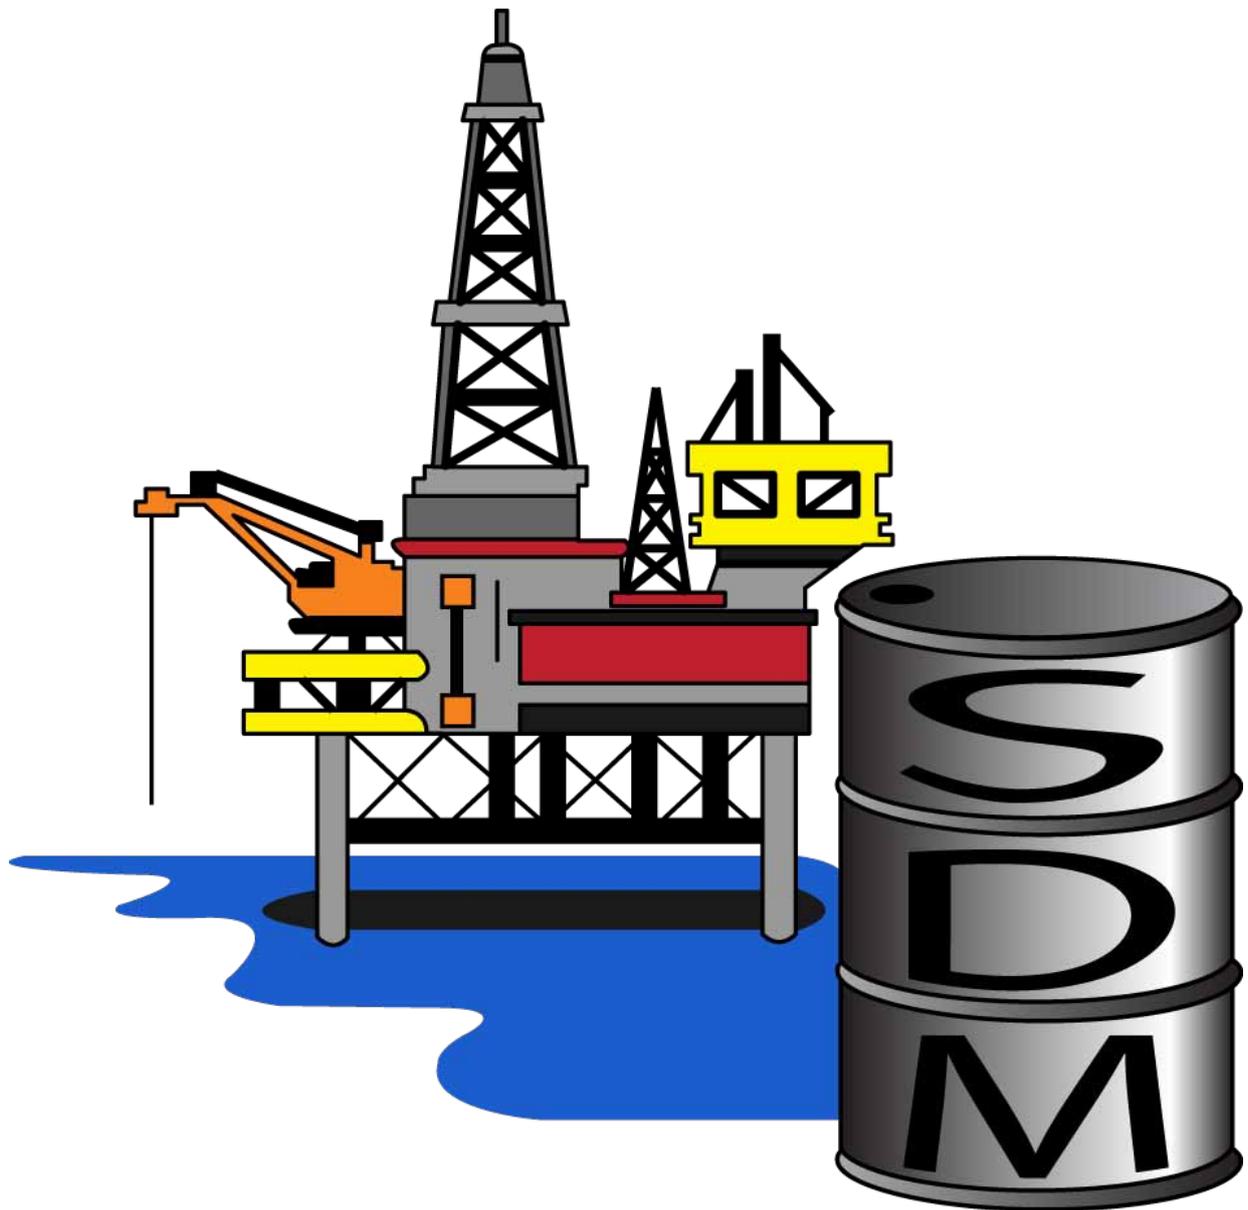

Legal head office
Via Bene Vagienna, 32 10136 TORINO ITALY

Operations and delivery office
Via Vernea, 49 10042 NICHELINO ITALY
Tel.+39 011350071 Fax +39 0113271647

Web site: www.sdmtorino.com Email: info@sdmtorino.com Skype: sdm.it

Abel.....	pages 40-41
Air Release.....	page 99
Aniline Point.....	pages 57-58
Ash.....	page 61
Asphaltenes In Crude Petroleum.....	page 53
Boiling Point.....	page 21
Breaking Point - Fraass.....	page 118
Brookfield.....	page 11
Cast Iron Corrosion.....	page 74
Centrifuge.....	page 62
Cleaner And Dry Capillary.....	page 18
Cleveland - COC.....	pages 42-43
Cloud And Pour Point.....	pages 19-20
Cobalt Bromide.....	page 92
Cold Filter Plugging Point (CFPP).....	page 25
Conradson - CCR.....	page 54
Contamination In Distillate Fuels.....	page 68
Contamination In Middle Distillate.....	page 68
Copper And Silver Corrosion.....	page 71
Corrosion Cast Aluminum Alloys.....	page 75
Corrosion Engine Coolants.....	page 76
Corrosion Greases.....	page 108
Cutbak Asphalt.....	page 50
Dean & Stark.....	page 52
Demulsibility.....	page 98
Density.....	pages 26-31
Density of LPG.....	page 91
Depentanization.....	page 60
Dew Point.....	page 93
Distillation Reduced Pressure.....	page 51
Distillation Unit.....	page 47
Drop Melting Point.....	page 113
Dropping Point.....	pages 109-111
Ductilometer.....	page 119
Emulsified Asphalts.....	page 120
Engler.....	page 7
Evaporation Bath - Air And Steam Jet.....	page 115
Evaporation Greases.....	page 104
FIA.....	page 59
Float Test.....	page 120
Flow Cup.....	page 6
Foaming Engine Coolants.....	page 101
Foaming Lubrificant Oil.....	page 100
Fractionated Distillation.....	page 50
Freezing Point.....	pages 23-24
Glass Capillary Viscometer.....	pages 12-18
Grease Worker.....	page 34
Heat Of Combustion - Mahler.....	page 65
Hoppler.....	page 8
Humidity Cabinet.....	page 89
Hydrocarbons Corrosion.....	page 73
Hydrogen Sulfide.....	page 92
Isolation.....	page 60
Melting Point.....	page 113
Lead And Salt.....	page 54
Loss On Heating and TFOT.....	page 121
LPG Corrosion.....	page 74
Oil Content Of Petroleum Waxes.....	page 114
Oxidation Stability - Gasoline.....	page 84
Oxidation Stability - Greases.....	page 83
Oxidation Stability - Mineral Insulation Oil... ..	page 81
Oxidation Stability - Oils.....	page 86
Oxidation Stability - RPVOT (RBOT) TFOT.....	page 79
Oxidation Stability - TOST.....	page 77
Paraffin Wax Content By Distillation.....	page 49
Particulate Contamination.....	page 68
Penetrometer.....	page 32
Pensky-Martens.....	pages 36-38
Ramsbottom - RCRT.....	page 55
Redwood.....	page 3
Roll Stability.....	page 35
Rolling Thin Film - RTFOT.....	page 121
Rust - Preventing Of Oils.....	page 87
Sampling.....	page 68-69
Saybolt.....	page 5
Saybolt Chromometer.....	page 112
Schilling Effusimeter.....	page 93
Scott.....	page 116
Sediment in Crude and Fuel Oil.....	page 53
Separation Greases.....	page 102

Small Scale Flash Point.....	page 39
Smoke Point.....	page 122
Softening Point - Ring And Ball.....	page 117
Solidification Point.....	page 22
Stability Of Middle Distillate.....	page 68
STV (TAR).....	page 4
Sulfonation.....	page 64
Sulfur- Lamp.....	page 67
Sulfur - Quartz Tube.....	page 66
Tag Closed.....	pages 44-45
Tag Open.....	page 46
Tar and Pitch.....	page 54
Total Sediment.....	page 56
Unulfonated Residue.....	page 64
Viscometer Bath.....	pages 9-10
Vapor Pressure LPG.....	page 94
Vapor Pressure - Pretroleum - Reid.....	page 95
Volatility LPG.....	page 90
Water In Crude Oil.....	page 52
Water Reaction Aviation Fuels.....	page 122
Water Sebarability - Herschel.....	page 97
Water Washout.....	page 107
Wheel Bearing Grase.....	page 106

INDEX

ASTM Thermometer.....	page 124-127
IP Thermometer.....	page 128-130
ASTM Method.....	page 131
IP And EN Methods.....	page 132
ISO And DIN Methods.....	page 133
Product Number.....	page 134

PUBLISHED SPECIFICATIONS AND PRODUCT DETAILS ARE SUBJECT TO AMENDMENT AS A RESULT OF NECESSARY OR DESIRABLE UPDATING OR IMPROVEMENT WITHOUT NOTICE. THE PICTURES ARE NOT BINDING TO THE PRODUCT.

VISCOSITY

REDWOOD

IP 70 (Obs) REDWOOD VISCOSITY

No.1 Determines viscosity of oils not exceeding 2000 seconds at the test temperature.

No.2 Determines viscosity of oils exceeding 2000 seconds at the test temperature.

Structure made of stainless steel, with front opened jacket, equipped with: bath with capacity of about 7 liters, calibrated brass oil cup with orifice no.1 or no.2, fitted with closing-ball-ended rod. Temperature regulation by digital thermoregulator PID with PT100 probe class A and overtemperature alarm, stainless steel heater, cooling coil, motor stirrer, insulated double wall, external level indicator and safety internal level for low liquid with warning lamp.

Technical specifications:

- Temperature: from ambient to 95°C (203°F) for no.1
from ambient to 250°C (482°F) for no.2
- Stability: ±0.1°C
- Bath capacity: 7 about liters
- Power supply: 230V ±3% 50/60Hz
- Power: 800W for no.1
1200W for no.2
- Dimensions: No.1 40x29x64 cm
No.2 40x29x61 cm
- Weight: 12 kg

120 REDWOOD VISCOMETER NO.1

122 REDWOOD VISCOMETER NO.2

**120/2 REDWOOD VISCOMETER NO.1
(2 POSITIONS)**

**122/2 REDWOOD VISCOMETER NO.2
(2 POSITIONS)**

**120/3 REDWOOD VISCOMETER NO.1
(3 POSITIONS)**

**122/3 REDWOOD VISCOMETER NO.2
(3 POSITIONS)**

CONSUMABLES x 2 YEARS

- | | |
|---------|---|
| 10-0103 | KOHLRAUSCH RECEIVING FLASK 50 ml,
pack of 3 pcs x1 |
| 15-0105 | O-RING, pack of 5 pcs x1 |



120

2016

ACCESSORIES ON REQUEST

- | | |
|------------|--|
| 10-0103 | KOHLRAUSCH RECEIVING FLASK 50 ml,
pack of 3 pcs |
| 10-0332 | DIGITAL STOPWATCH
7 digit LCD, max.10 hours, 1/100 sec,
digit h=8 mm |
| 10-0371/20 | SILICONE OIL 20 cSt pack of 25 kg
For temperature from ambient to 120°C (248°F) |
| 10-0371/50 | SILICONE OIL 50 cSt, pack of 25 kg
For temperature from 100°C (212°F) to 200°C
(392°F) |
| T-IP8C | THERMOMETER IP 8C |
| T-IP8F | THERMOMETER IP 8F |
| T-IP9C | THERMOMETER IP 9C |
| T-IP9F | THERMOMETER IP 9F |
| T-IP10C | THERMOMETER IP 10C |
| T-IP10F | THERMOMETER IP 10F |

SPARE PARTS

- | | |
|-------------|---|
| 15-0101 | CALIBRATED OIL CUP WITH ORIFICE NO.1
Brass |
| 15-0102 | CALIBRATED OIL CUP WITH ORIFICE NO.2
Brass |
| 15-0104 | CLOSING-BALL-ENDED ROD |
| 14-0001 | PROBE PT100A |
| 11-0008 | HEATER 800W (for no.1) |
| 11-0012/13 | HEATER 2200W (for no.2) |
| 15-0003/120 | LEVEL SWITCH (for no.1) |
| 15-0003/200 | LEVEL SWITCH (for no.2) |
| 16-0005 | DIGITAL THERMOREGULATOR |
| 15-0015 | STATIC RELAY |
| 15-0004 | BIPOLAR GREEN SWITCH |
| 12-0001 | MOTOR STIRRER |

VISCOSITY

STV (TAR)

IP 72 VISCOSITY CUTBACK BITUMEN

Measure of the viscosity by determining the time of efflux of 50ml of a cutback bitumen, at 40°C (104°F), through a 10 mm orifice with efflux times in the range 15 to 500 sec.

EN 12846-1 DETERMINATION OF EFFLUX TIME BY THE EFFLUX VISCOMETER - BITUMINOUS EMULSIONS

For the determination of the efflux time at 40°C (104°F) of bituminous emulsions in seconds using an efflux viscometer. Alternative test temperature is 50°C (122°F)

EN 12846-2 DETERMINATION OF EFFLUX TIME BY THE EFFLUX VISCOMETER - CUT-BACK AND FLUXED BITUMINOUS BINDERS

For the determination of the efflux time at 25°C (77°F) of petroleum cut-back and fluxed bituminous binders in seconds using an efflux viscometer. Alternative test temperatures are 40°C (104°F) 50°C (122°F) and 60°C (140°F)

EN 13357 DETERMINATION OF THE EFFLUX TIME OF PETROLEUM CUT-BACK AND FLUXED BITUMENS

Specifies a method for the determination of the efflux time of petroleum cut-back and fluxed bitumens in seconds using an efflux viscometer

Structure made of stainless steel, with front opened jacket, equipped with: bath with capacity of about 7 liters, calibrated brass oil cup with orifice Ø10mm, fitted with closing-ball-ended rod and level indicator. Temperature regulation by digital thermoregulator PID with PT100 probe class A and overtemperature alarm, stainless steel heater, cooling coil, motor stirrer, insulated double wall, external level indicator and safety internal level for low liquid with warning lamp.

Technical specifications:

- Temperature: from ambient to 60°C (140°F)
- Stability: ±0.1°C
- Bath capacity: 7 about liters
- Power supply: 230V ±10% 50/60Hz
- Power: 800W
- Dimensions: 40x29x64 cm
- Weight: 11 kg

140 STV (TAR) VISCOMETER

140/2 STV (TAR) VISCOMETER (2 POSITIONS)

140/3 SYV (TAR) VISCOMETER (3 POSITIONS)

140/4 SYV (TAR) VISCOMETER (4 POSITIONS)

ACCESSORIES ON REQUEST

10-0140	CALIBRATED CUP WITH ORIFICE Ø2 mm Brass
10-0141	CALIBRATED CUP WITH ORIFICE Ø4 mm Brass
10-0143	100 ml RECEIVER, pack of 3 pcs Calibrated to 20, 25 and 75 ml.
10-0146	GO/NOT GO GAUGE Ø2 mm
10-0144	GO/NOT GO GAUGE Ø4 mm
10-0145	GO/NOT GO GAUGE Ø10 mm
10-0332	DIGITAL STOPWATCH 7 digit LCD, max.10 hours, 1/100 sec, digit h=8 mm
T-AS17C	THERMOMETER ASTM 17C
T-AS17F	THERMOMETER ASTM 17F
T-AS19C	THERMOMETER ASTM 19C
T-AS19F	THERMOMETER ASTM 19F
T-IP8C	THERMOMETER IP 8C
T-IP8F	THERMOMETER IP 8F

CONSUMABLES x 2 YEARS

10-0143	100 ml RECEIVER, pack of 3 pcs x1
15-0140	O-RING, pack of 5 pcs x1

SPARE PARTS

15-0142	CALIBRATED CUP WITH ORIFICE Ø10 mm
15-0147/2	CLOSING-BALL-ENDED ROD Ø2 mm
15-0147/4	CLOSING-BALL-ENDED ROD Ø4 mm
15-0147/10	CLOSING-BALL-ENDED ROD Ø10 mm
14-0001	PROBE PT100A
11-0008	HEATER 800W
15-0003/120	LEVEL SWITCH
16-0005	DIGITAL THERMOREGULATOR
15-0015	STATIC RELAY
15-0004	BIPOLAR GREEN SWITCH
12-0001	MOTOR STIRRER



VISCOSITY

SAYBOLT

ASTM D88 SAYBOLT VISCOSITY

Covers the empirical procedures for determining the Saybolt Universal or Saybolt Furol viscosities of petroleum products at specified temperatures between 21 and 99°C (70 and 210°F).

ASTM E102 SAYBOLT FULOL VISCOSITY OF BITUMINOUS MATERIALS AT HIGH TEMPERATURES

This test method covers the empirical procedures for determining the Saybolt Furol viscosities of bituminous materials at specified temperatures between 120 and 240°C (248 and 464°F).

Structure made in stainless steel, with front opened jacket, equipped with: bath with capacity of about 10 liters, calibrated brass oil cup with stainless steel flowing orifice, polished and calibrated Ø1.76 mm Universal and Ø3.15 mm Furol, orifice wrench and thermometer support. Temperature regulation by digital thermoregulator PID with PT100 probe class A and overtemperature alarm, stainless steel heater, cooling coil, motor stirrer, insulated double wall, external level indicator and safety internal level for low liquid with warning lamp.

Technical specifications:

- Temperature: from ambient to 240°C (464°F)
- Stability: ±0.1°C
- Bath capacity: 10 about liters
- Power supply: 230V ±10% 50/60Hz
- Power: 1200W
- Dimensions: 40x29x61 cm
- Weight: 12 kg

180 SAYBOLT VISCOMETER

180/2 SAYBOLT VISCOMETER (2 POSITIONS)

180/3 SAYBOLT VISCOMETER (3 POSITIONS)

180/4 SAYBOLT VISCOMETER (4 POSITIONS)

ACCESSORIES ON REQUEST

- | | |
|------------|---|
| 10-0161 | FILTER FUNNEL
With interchangeable 150 µm (No.100) and 75 µm (No.200) wire cloth |
| 10-0162 | SAYBOLT FLASK, 60 ml |
| 10-0164 | WITHDRAWAL TUBE |
| 10-0167 | DISPLACEMENT RING ASTM E102 |
| 10-0168 | SUCTION PIPETTE |
| 10-0169 | CUP COVER |
| 10-0171 | CUP CLEANING PLUNGER |
| 10-0332 | DIGITAL STOPWATCH
7 digit LCD, max.10 hours, 1/100 sec, digit h=8 mm |
| 10-0371/20 | SILICONE OIL 20 cSt, pack of 25 kg
For temperature from ambient to 120°C (248°F) |
| 10-0371/50 | SILICONE OIL 50 cSt, pack of 25 kg
For temperature from 100°C (212°F) to 200°C (392°F) |

For ASTM D88

- | | |
|---------|----------------------|
| T-AS17C | THERMOMETER ASTM 17C |
| T-AS17F | THERMOMETER ASTM 17F |
| T-AS18C | THERMOMETER ASTM 18C |
| T-AS18F | THERMOMETER ASTM 18F |
| T-AS19C | THERMOMETER ASTM 19C |
| T-AS19F | THERMOMETER ASTM 19F |
| T-AS20C | THERMOMETER ASTM 20C |
| T-AS20F | THERMOMETER ASTM 20F |
| T-AS21C | THERMOMETER ASTM 21C |
| T-AS21F | THERMOMETER ASTM 21F |
| T-AS22C | THERMOMETER ASTM 22C |
| T-AS22F | THERMOMETER ASTM 22F |

For ASTM E102

- | | |
|----------|-----------------------|
| T-AS77F | THERMOMETER ASTM 77F |
| T-AS78F | THERMOMETER ASTM 78F |
| T-AS79F | THERMOMETER ASTM 79F |
| T-AS80F | THERMOMETER ASTM 80F |
| T-AS81F | THERMOMETER ASTM 81F |
| T-AS108F | THERMOMETER ASTM 108F |
| T-AS109F | THERMOMETER ASTM 109F |



CONSUMABLES x 2 YEARS

- | | |
|---------|-------------------------|
| 10-0162 | SAYBOLT FLASK, 60 ml x3 |
|---------|-------------------------|

SPARE PARTS

- | | |
|-------------|------------------------------------|
| 15-0163 | THERMOMETER SUPPORT |
| 15-0165 | UNIVERSAL ORIFICE |
| 15-0166 | FULOL ORIFICE |
| 15-0165/W | ORIFICE WRENCH |
| 15-0172/W | CUP WRENCH |
| 15-0172 | CALIBRATED OIL CUP WITHOUT ORIFICE |
| 14-0001 | PROBE PT100A |
| 11-0012/13 | HEATER 2200W |
| 15-0003/200 | LEVEL SWITCH |
| 16-0007 | DIGITAL THERMOREGULATOR |
| 15-0015 | STATIC RELAY |
| 15-0004 | BIPOLAR GREEN SWITCH |
| 12-0001 | MOTOR STIRRER |

VISCOSITY

FLOW CUP

ASTM D1200 D5125 EN 535 ISO 2431 DIN 53211 DIN 53224 VISCOSITY BY FORD VISCOSITY CUP

Covers the determination of the viscosity of Newtonian or near Newtonian paints, varnishes, lacquers and related liquid material.

ASTM D1200

200 FORD FLOW CUP

Anodized aluminium cup.

ACCESSORIES ON REQUEST

10-0200/1	ORIFICE ASTM NO.1, Ø1.9 mm Stainless steel
10-0200/2	ORIFICE ASTM NO.2, Ø2.53 mm Stainless steel
10-0200/3	ORIFICE ASTM NO.3, Ø3.4 mm Stainless steel
10-0200/4	ORIFICE ASTM NO.4, Ø4.12 mm Stainless steel
10-0200/5	ORIFICE ASTM NO.5, Ø5.2 mm Stainless steel
10-0204	FLOW CUP STAND
10-0332	DIGITAL STOPWATCH 7 digit LCD, max.10 hours, 1/100 sec, digit h=8 mm



200

2010

DIN 53211

210 FLOW CUP DIN 53211

Anodized aluminium cup.

ACCESSORIES ON REQUEST

10-0210/2	ORIFICE NO.2, Ø2 mm Stainless steel
10-0210/3	ORIFICE NO.3, Ø3 mm Stainless steel
10-0210/4	ORIFICE NO.4, Ø4 mm Stainless steel
10-0210/5	ORIFICE NO.5, Ø5 mm Stainless steel
10-0210/6	ORIFICE NO.6, Ø6 mm Stainless steel
10-0210/7	ORIFICE NO.7, Ø7 mm Stainless steel
10-0210/8	ORIFICE NO.8, Ø8 mm Stainless steel
10-0204	FLOW CUP STAND
10-0332	DIGITAL STOPWATCH 7 digit LCD, max.10 hours, 1/100 sec, digit h=8 mm

ASTM D5125 EN 535 ISO 2431 DIN 53224

220/2 ISO FLOW CUP

Anodized aluminium cup, stainless steel orifice Ø2 mm

220/3 ISO FLOW CUP

Anodized aluminium cup, stainless steel orifice Ø3 mm

220/4 ISO FLOW CUP

Anodized aluminium cup, stainless steel orifice Ø4 mm

220/5 ISO FLOW CUP

Anodized aluminium cup, stainless steel orifice Ø5 mm

220/6 ISO FLOW CUP

Anodized aluminium cup, stainless steel orifice Ø6 mm

220/8 ISO FLOW CUP

Anodized aluminium cup, stainless steel orifice Ø8 mm

ACCESSORIES ON REQUEST

10-0204	FLOW CUP STAND
10-0332	DIGITAL STOPWATCH 7 digit LCD, max.10 hours, 1/100 sec, digit h=8 mm

ASTM D816 (obs) RUBBER CEMENTS

These test methods cover tests to measure the properties of adhesives, commonly called rubber cements, that may be applied in plastic or fluid form and that are manufactured from natural rubber, reclaimed rubber, synthetic elastomers, or combinations of these materials.

ASTM D1084 (obs) VISCOSITY OF ADHESIVES

ASTM D4212 VISCOSITY BY DIP-TYPE VISCOSITY CUPS

Covers the determination of viscosity of paints, varnishes, lacquers, inks and related liquid materials by dip-type viscosity cups.

190/1 ZAHN FLOW CUP, NO.1

Brass, 1.98 mm., 20 - 85 cP

190/2 ZAHN FLOW CUP, NO.2

Brass, 2.74 mm., 30 - 170 cP

190/3 ZAHN FLOW CUP, NO.3


Brass, 3.76 mm., 170 - 550 cP

190/4 ZAHN FLOW CUP, NO.4

Brass, 4.26 mm., 200 - 900 cP

190/5 ZAHN FLOW CUP, NO.5

Brass, 5.28 mm., 250 - 1200 cP

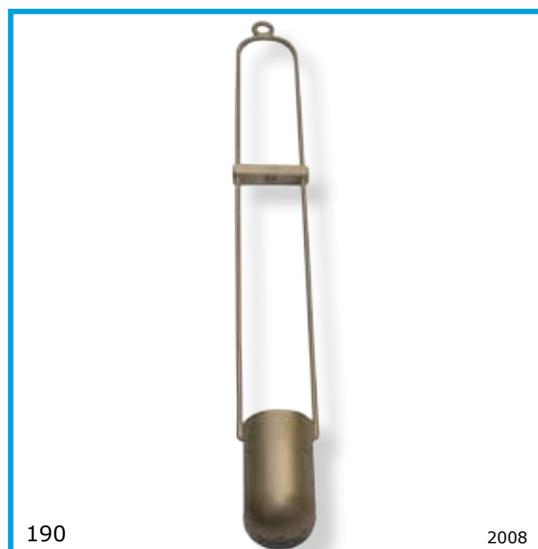

190

2008

VISCOSITY

ENGLER

ASTM D1665 IP 212 DIN 51560 ENGLER SPECIFIC VISCOSITY OF TAR PRODUCTS

Covers the determination of specific viscosity of tars and their fluid products. It does not determine absolute viscosity but is an empirical flow test.

260 CONVENTIONAL ENGLER VISCOMETER

Brass test cup with stainless steel level-control of capillary flow outcropping, lid with PTFE tipped rod for closing the capillary hole, hand stirrer, bath with stainless steel heater regulated by table electronic regulator, tripod stand.

Technical specifications:

- Temperature: from ambient to 100°C (212°F)
- Stability: $\pm 1^\circ\text{C}$
- Power supply: 230V $\pm 10\%$ 50/60Hz
- Power: 300W

270 ENGLER VISCOMETER

Structure made in stainless steel, with front opened jacket, equipped with: bath with capacity of about 7 liters, calibrated brass cup, with stainless steel orifice, PTFE tipped closing rod. Temperature regulation by digital thermoregulator PID with PT100 probe class A and overtemperature alarm, stainless steel heater, cooling coil, motor stirrer, insulated double wall, external level indicator and safety internal level for low liquid with warning lamp.

Technical specifications:

- Temperature: from ambient to 100°C (212°F)
- Stability: $\pm 0.1^\circ\text{C}$
- Bath capacity: 7 about liters
- Power supply: 230V $\pm 10\%$ 50/60Hz
- Power: 800W
- Dimensions: 40x29x64 cm
- Weight: 12 kg

270/2 ENGLER VISCOMETER (2 POSITIONS)



ACCESSORIES ON REQUEST

10-0261	FILTER FUNNEL With stainless steel wire mesh
10-0265	TESTING FLASK 50 ml, pack of 3 pcs Graduate and calibrated at 20°C
10-0267	KOHLRAUSCH FLASK 200 ml, pack of 3 pcs Graduation mark and calibrated at 20°C
10-0332	DIGITAL STOPWATCH 7 digit LCD, max.10 hours, 1/100 sec, digit h=8 mm
T-AS23C	THERMOMETER ASTM 23C
T-AS24C	THERMOMETER ASTM 24C
T-AS25C	THERMOMETER ASTM 25C
T-IP76C	THERMOMETER IP 76C

CONSUMABLES x 2 YEARS

10-0265	TESTING FLASK 50 ml, pack of 3 pcs x1
10-0267	KOHLRAUSCH FLASK 200 ml, pack of 3 pcs x1

SPARE PARTS

15-0113	ELECTRONIC REGULATOR (for 260)
11-0261	HEATER 300W (for 260)
15-0270	ENGLER CUP
15-0271	ENGLER LEVEL-CONTROL
15-0165/W	ORIFICE WRENCH
14-0001	PROBE PT100A
11-0008	HEATER 800W (for 270)
15-0003/120	LEVEL SWITCH
16-0005	DIGITAL THERMOREGULATOR
15-0015	STATIC RELAY
15-0004	BIPOLAR GREEN SWITCH
12-0001	MOTOR STIRRER



HÖPPLER

DIN 53015 HÖPPLER

This standard specifies a method of determining the dynamic viscosity of Newtonian liquids using the Höppler falling-ball viscometer, including a method of calibrating the viscometer

Suitable for viscosity 0.5 a 100.000 mPa*s (cP). Mounted on support with levelling screws and bubble level, fitted with stop pin which allows the viscometer to reverse. Calibrated fall tube tube with two maximum level notches and an intermediate-level one, equipped with 6 gauged balls:

1+2=borosilicate glass, 3+4=Ni-Fe, 5+6=steel.

Pyrex glass jacket for thermostatic bath with covers, neoprene gaskets, connections for the circulation of the thermostated liquid from the thermostatic bath. With certificate at 20°C.

Technical specifications:

- Temperature: from -20 to +120°C (-4 to 248°F)

(with external unit)

- Power supply: 230V ±10% 50/60Hz (for 330)

- Power: 110W (for 330)

320 HÖPPLER VISCOMETER

330 HÖPPLER HEATED VISCOMETER

With heater element regulated by electronic regulator table version. With certificate at 20°C.



ACCESSORIES ON REQUEST

722/P	CIRCULATING BATH ±0.02°C
10-0332	DIGITAL STOPWATCH 7 digit LCD, max.10 hours, 1/100 sec, digit h=8 mm
T-0332	THERMOMETER 19° +21°C, DIV. 0.02°
T-0333	THERMOMETER -1° +26°C, DIV. 0.1°
T-0334	THERMOMETER 24° +51°C, DIV. 0.1°
T-0335	THERMOMETER 49° +76°C, DIV. 0.1°
T-0336	THERMOMETER 74 +101°C, DIV.0.1°
T-0337	THERMOMETER 99 +126°C, DIV.0.1°
T-0338	THERMOMETER 124 +151°C, DIV.0.1°

CONSUMABLES x 2 YEARS

15-0324	NEOPRENE GASKET, pack of 10 pcs
---------	---------------------------------

SPARE PARTS

15-0321	CALIBRATED FALL TUBE
15-0322	CLIBRATED BALLS 1+2=borosilicate glass, 3+4=Ni-Fe, 5+6=steel
11-0331	HEATER (for 330)
15-0113	ELECTRONIC REGULATOR (for 330)

VISCOSITY

VISCOMETER BATH

ASTM D445 IP 71 ISO 3104 KINEMATIC VISCOSITY OF TRANSPARENT AND OPAQUE LIQUIDS (AND CALCULATION OF DYNAMIC VISCOSITY)

Procedure for the determination of the kinematic viscosity of liquid petroleum products, both transparent and opaque, by measuring the time for a volume of liquid to flow under gravity through a calibrated glass capillary viscometer. The dynamic viscosity can be obtained by multiplying the kinematic viscosity by the density of the liquid.

ASTM D446 IP 71 ISO 3105 STANDARD SPECIFICATIONS AND OPERATING INSTRUCTIONS FOR GLASS CAPILLARY KINEMATIC VISCOMETERS

ASTM D2170 IP 319 KINEMATIC VISCOSITY OF ASPHALTS (BITUMENS)

Procedure for the determination of kinematic viscosity of liquid asphalts (bitumens), road oils and distillation residues of liquid asphalts (bitumens) all at 60°C (140°F) and of asphalt cements at 135°C (275°F) in the range from 6 to 100.000 mm²/s (cSt).

EN 12595 KINEMATIC VISCOSITY OF BITUMEN AND BITUMINOUS BINDERS

For the determination of the kinematic viscosity of bituminous binders at 60°C and 135 °C in the range from 6 to 300.000 mm²/s (cSt). Bituminous Emulsions are not covered within the scope of this method..

For the determination of the kinematic viscosity with glass capillary viscometer.

Borosilicate tank, cover with 5 holes 50.8 mm, leakage protection vessel made of tempered glass supplied with cork disk supporting and stainless steel base, stainless steel control box on the cover, temperature controlled by digital thermoregulator PID with PT100 probe class A and overtemperature alarm, stainless steel heater, cooling coil for improved control near to ambient temperature, motor stirrer, safety internal level for low liquid with warning lamp. With stand-by stainless steel covers.

Technical specifications:

- Temperature: from ambient to 150°C (302°F)
- Stability: ±0.1°C
- Bath capacity: about 15 liters
- Power supply: 230V ±10% 50/60 Hz
- Power: 1200W
- Dimensions: 35x35x52 cm
- Weight: 15 kg.

370 VISCOMETER BATH 150°C ±0.1°

ACCESSORIES ON REQUEST

- | | |
|------------|---|
| 10-0371/20 | SILICONE OIL 20 cSt pack of 25 kg
For temperature from ambient to 120°C (248°F) |
| 10-0371/50 | SILICONE OIL 50 cSt, pack of 25 kg
For temperature from 100°C (212°F) to 200°C (392°F) |
| 10-0372 | VISCOSITY TEMPERATURE CHARTS
For liquid petroleum products, charts I thru VII |
| 10-0373 | FILTER, 75 MICRON |
| 10-0374 | STOPPER FOR GLASS CAPILLARY VISCOMETERS, pack of 5 pcs
Made of silicone |
| 10-0375 | METALLIC SYRINGE |
| 10-0332 | DIGITAL STOPWATCH
7 digit LCD, max.10 hours, 1/100 sec,
digit h=8 mm |
| 10-0371 | BACK LIGHT |

Glass capillary page from 12 to 18

SPARE PARTS

- | | |
|------------------|---------------------------|
| 18-0001 | JAR |
| 18-0003/CONT/330 | LEAKAGE PROTECTION VESSEL |
| 15-0371 | LAMP |
| 14-0002 | PROBE PT100A |
| 11-0012/13 | HEATER 2200W |
| 15-0003/120 | LEVEL SWITCH |
| 16-0005 | DIGITAL THERMOREGULATOR |
| 15-0015 | STATIC RELAY |
| 15-0004 | BIPOLAR GREEN SWITCH |
| 12-0001 | MOTOR STIRRER |



VISCOSITY

Borosilicate tank, cover with 5 holes 50.8mm, PT100 probe class A, stainless steel heater, cooling coil for improved control near to ambient temperature, motor stirrer, safety internal level for low liquid, containment chamber.

Plate base painted with antiacid epoxy products which houses LCD touch display 4.3" with PID controller, independent timer for each position (total 5), set up constant and automatic viscosity in cSt result, overtemperature alarm.

With stand-by stainless steel covers and back led light.

Technical specifications:

- Temperature: from ambient to 150°C (302°F)
- Stability: up to +100°C (212°F) $\pm 0.02^\circ\text{C}$ over $\pm 0.05^\circ\text{C}$
- Bath capacity: about 15 liters
- Power supply: 220V $\pm 10\%$ 50/60 Hz
- Power: 1300W
- Dimensions: 60x34x60 cm
- Weight: 27 Kg

390 VISCOMETER BATH -HIGH PRECISION-150°C



390

2016

Structure made in stainless steel, cover with 5 holes 50.8mm, temperature control by LCD touch display 4.3" with PID controller, independent timer for each position (total 5), set up constant and automatic viscosity in cSt result, PT100 probe class A, overtemperature alarm, stainless steel heater, motor stirrer, safety internal level for low liquid. Refrigeration system with ecological compressor CFC free R404A, stand-by stainless steel and back light.

Technical specifications:

- Temperature: from -30° to +60°C (-22 +140°F)
- Stability: from 15° (59°F) to 60°C (140°F) $\pm 0.02^\circ\text{C}$, da -30° (-22°F) to 15°C (59°F) $\pm 0.05^\circ\text{C}$
- Bath capacity: 28 about liters
- Power supply: 230V $\pm 10\%$ 50Hz
- Power: 3500W

450 REFRIGERATED VISCOMETER BATH -30°+60°C $\pm 0.01^\circ$

ACCESSORIES ON REQUEST

- | | |
|------------|---|
| 10-0371/20 | SILICONE OIL 20 cSt pack of 25 kg
For temperature from ambient to 120°C (248°F) |
| 10-0371/50 | SILICONE OIL 50 cSt, pack of 25 kg
For temperature from 100°C (212°F) to 200°C (392°F) |
| 10-0372 | VISCOSITY TEMPERATURE CHARTS
For liquid petroleum products, charts I thru VII |
| 10-0373 | FILTER, 75 MICRON |
| 10-0374 | STOPPER FOR GLASS CAPILLARY
VISCOMETERS, pack of 5 pcs
Made of silicone |
| 10-0375 | METALLIC SYRINGE |
| T-AS28C | THERMOMETER ASTM 28C IP 31C |
| T-AS29C | THERMOMETER ASTM 29C IP 34C |
| T-AS44C | THERMOMETER ASTM 44C IP 29C |
| T-AS45C | THERMOMETER ASTM 45C IP 30C |
| T-AS46C | THERMOMETER ASTM 46C IP 66C |
| T-AS47C | THERMOMETER ASTM 47C IP 35C |
| T-AS48C | THERMOMETER ASTM 48C IP 90C |
| T-AS72C | THERMOMETER ASTM 72C IP 67C |
| T-AS73C | THERMOMETER ASTM 73C IP 68C |
| T-AS74C | THERMOMETER ASTM 74C IP 69C |
| T-AS110C | THERMOMETER ASTM 110C IP 83C |
| T-AS118C | THERMOMETER ASTM 118C |
| T-AS120C | THERMOMETER ASTM 120C IP 92C |
| T-AS121C | THERMOMETER ASTM 121C IP 32C |
| T-AS126C | THERMOMETER ASTM 126C IP 71C |
| T-AS127C | THERMOMETER ASTM 127C IP 99C |
| T-AS128C | THERMOMETER ASTM 128C IP 33C |
| T-AS129C | THERMOMETER ASTM 129C IP 36C |
| T-AS132C | THERMOMETER ASTM 132C IP 102C |

Glass capillary page from 12 to 18

SPARE PARTS

- | | |
|---------|------|
| 15-0371 | LAMP |
|---------|------|

BROOKFIELD - LOW TEMPERATURE

ASTM D2983 LOW-TEMPERATURE VISCOSITY OF LUBRICANTS MEASURED BY BROOKFIELD VISCOMETER

This test method covers the use of Brookfield viscometers of appropriate torque for the determination of the low shear-rate viscosity of lubricants. The test is applied over the viscosity range of 500 to 900 000 mPa·s within a low temperature range appropriate to the capacity of the viscometer head.

Floor model with a stainless steel cold air cabinet and structure painted with anti-acid epoxidic products, fitted with 4 wheels with brake. Internal cabinet with turntable base at 4 rpm. rack for 3 test tube and 3 balsa woodcell carrier.

Cover with stop in aperture and automatic defrosting device, The temperature is controlled by digital thermoregulator PID fitted with a probe PT100 A, earth leakage circuit breaker, compressor CFC free refrigerant gases are used.

Technical specifications:

- Temperature: from ambient to -40°C (-40°F)
- Stability: ±0.3°C
- Power supply: 230V ±10% 50Hz
- Power: 1600W
- Dimensions: 82x88x160 cm
- Weight: 150 kg.

470 BROOKFIELD VISCOMETER BATH

ACCESSORIES ON REQUEST

230/DV2T	ORIGINAL BROOKFIELD VISCOMETER
10-0471	4B2 SPINDLE
10-0472	TEST CELL, pack of 12 pcs
10-0473	CELL STOPPER
10-0474	BALSE WOOD TEST CELL CARRIER
10-0475	SPINDLE CLIPS
T-AS122C	THERMOMETER ASTM 122C IP 94C
T-AS123C	THERMOMETER ASTM 123C IP 95C
T-AS124C	THERMOMETER ASTM 124C IP 96C
T-AS125C	THERMOMETER ASTM 125C IP 97C

CONSUMABLES x 2 YEARS

10-0471	4B2 SPINDLE x1
10-0472	TEST CELL, pack of 12 pcs x1
10-0473	CELL STOPPER x1
10-0474	BALSE WOOD TEST CELL CARRIER x1
10-0475	SPINDLE CLIPS x1

SPARE PARTS

15-0471	FAN
14-0006	PROBE PT100A
11-0470	HEATER
16-0005	DIGITAL THERMOREGULATOR
15-0015	STATIC RELAY
15-0004	BIPOLAR GREEN SWITCH
15-0005	BIPOLAR YELLOW SWITCH
15-0019	EARTH LEAKAGE CIRCUIT BREAKER



470

2008

VISCOSITY

GLASS CAPILLARY VISCOMETERS

UBBELOHDE VISCOMETER

ASTM D445 D446 IP 71 ISO 3104 ISO 3105

For transparent liquids, with certificate

Require liquid bath depth of 241 mm, minimum sample volume 11 ml.

Item	Size	Approx. constant mm ² /s ² (cSt/s)	Kinematic viscosity range mm ² /s (cSt)
340/0	0	0.001	0.3-1
340/0C	0C	0.003	0.6-3
340/0B	0B	0.005	1-5
340/1	1	0.01	2-10
340/1C	1C	0.03	6-30
340/1B	1B	0.05	10-50
340/2	2	0.1	20-100
340/2C	2C	0.3	60-300
340/2B	2B	0.5	100-500
340/3	3	1	200-1000
340/3C	3C	3	600-3000
340/3B	3B	5	1000-5000
340/4	4	10	2000-10000
340/4C	4C	30	6000-30000
340/4B	4B	50	10000-50000
340/5	5	100	20000-100000

On request uncalibrated with item 340/.../U, where "..." is the size

ACCESSORIES ON REQUEST

10-0340 VISCOMETER HOLDER
Metallic

CANNON-FENSKE ROUTINE VISCOMETER

ASTM D445 D446 IP 71 ISO 3104 ISO 3105

For transparent liquids, with certificate

Require liquid bath depth of 203 mm, minimum sample volume 7 ml.

Item	Size	Approx. constant mm ² /s ² (cSt/s)	Kinematic viscosity range mm ² /s (cSt)
350/25	25	0.002	0.5-2
350/50	50	0.004	0.8-4
350/75	75	0.008	1.6-8
350/100	100	0.015	3-15
350/150	150	0.035	7-35
350/200	200	0.1	20-100
350/300	300	0.25	50-250
350/350	350	0.5	100-500
350/400	400	1.2	240-1200
350/450	450	2.5	500-2500
350/500	500	8	1600-8000
350/600	600	20	4000-20000
350/650	650	45	9000-45000
350/700	700	100	20000-100000

On request uncalibrated with item 350/.../U, where "..." is the Size

ACCESSORIES ON REQUEST

10-0350 VISCOMETER HOLDER, pack of 5 pcs
SH80 rubber

VISCOSITY

CANNON-FENSKE OPAQUE VISCOMETER ASTM D445 D446 ASTM D2170 IP 71 ISO 3104 ISO 3105

For opaque liquids, with certificate.
Require liquid bath depth of 229 mm, minimum sample volume 12 ml.

Item	Size	Approx. constant mm ² /s ² (cSt/s)	Kinematic viscosity range mm ² /s (cSt)
360/25	25	0.002	0.5-2
360/50	50	0.004	0.8-4
360/75	75	0.008	1.6-8
360/100	100	0.015	3-15
360/150	150	0.035	7-35
360/200	200	0.1	20-100
360/300	300	0.25	50-250
360/350	350	0.5	100-500
360/400	400	1.2	240-1200
360/450	450	2.5	500-2500
360/500	500	8	1600-8000
360/600	600	20	4000-20000
360/650	650	45	9000-45000
360/700	700	100	20000-100000

On request uncalibrated with item 360/.../U, where "... " is the size

ACCESSORIES ON REQUEST

10-0350 VISCOMETER HOLDER, , pack of 5 pcs
SH80 rubber

BS/IP/MSL MINIATURE SUSPENDED LEVEL ASTM D445 D446 IP 71 ISO 3104 ISO 3105

For transparent liquids, with certificate
Require liquid bath depth of 305 mm, minimum sample volume 4 ml.

Item	Size	Approx. constant mm ² /s ² (cSt/s)	Kinematic viscosity range mm ² /s (cSt)
342/1	1	0.003	0.6-3
342/2	2	0.001	2-10
342/3	3	0.03	6-30
342/4	4	0.1	20-100
342/5	5	0.3	60-300
342/6	6	1.0	200-1000
342/7	7	3.0	600-3000

ACCESSORIES ON REQUEST

10-0342 VISCOMETER HOLDER
Metallic

VISCOSITY

BS/IP/SL SUSPENDED LEVEL

ASTM D445 D446 IP 71 ISO 3104 ISO 3105

For transparent liquids, with certificate

Require liquid bath depth of 250 mm, minimum sample volume 11 ml.

Item	Size	Approx. constant mm ² /s ² (cSt/s)	Kinematic viscosity range mm ² /s (cSt)
344/1	1	0.01	0.35-10
344/1A	1A	0.03	6-30
344/2	2	0.1	20-100
344/2A	2A	0.3	60-300
344/3	3	1	200-1000
344/3A	3A	3	600-3000
344/4	4	10	2000-10000
344/4A	4A	30	6000-30000
344/5	5	100	20000-100000

ACCESSORIES ON REQUEST

10-0342 VISCOMETER HOLDER
Metallic

BS/U/M MINIATURE U-TUBE

ASTM D445 D446 IP 71 ISO 3104 ISO 3105

For transparent liquids, with certificate

Require liquid bath depth of 230 mm, minimum sample volume 2 ml.

Item	Size	Approx. constant mm ² /s ² (cSt/s)	Kinematic viscosity range mm ² /s (cSt)
346/M1	M1	0.001	0.2-1
346/M2	M2	0.005	1-5
346/M3	M3	0.015	3-15
346/M4	M4	0.04	8-40
346/M5	M5	0.1	20-100

BS/U-TUBE

ASTM D445 D446 IP 71 ISO 3104 ISO 3105

For transparent liquids, with certificate

Require liquid bath depth of 280 mm, minimum sample volume 7 ml. from size A to C, 12 ml. from D to F and 23 ml. from G to H.

Item	Size	Approx. constant mm ² /s ² (cSt/s)	Kinematic viscosity range mm ² /s (cSt)
348/A	A	0.003	0.9-3
348/B	B	0.01	2.0-10
348/C	C	0.03	6-30
348/D	D	0.1	20-100
348/E	E	0.3	60-300
348/F	F	1	200-1000
348/G	G	3	600-3000
348/H	H	10	2000-10000

VISCOSITY

CANNON-MANNING SEMI-MICRO

ASTM D445 D446 IP 71 ISO 3104 ISO 3105

For transparent liquids, with certificate

Require liquid bath depth of 200 mm, minimum sample volume 1 ml.

Item	Size	Approx. constant mm ² /s ² (cSt/s)	Kinematic viscosity range mm ² /s (cSt)
352/25	25	0.002	0.5-2
352/50	50	0.004	0.8-4
352/75	75	0.008	1.6-8
352/100	100	0.015	3-15
352/150	150	0.035	7-35
352/200	200	0.1	20-100
352/300	300	0.25	50-250
352/350	350	0.5	100-500
352/400	400	1.2	240-1200
352/450	450	2.5	500-2500
352/500	500	8	1600-8000
352/600	600	20	4000-20000

On request uncalibrated with item 352/.../U, where "..." is the size

ACCESSORIES ON REQUEST

10-0350 VISCOMETER HOLDER, , pack of 5 pcs
SH80 rubber

BS/IP/SL(S) SUSPENDED LEVEL

ASTM D445 D446 IP 71 ISO 3104 ISO 3105

For transparent liquids, with certificate

Require liquid bath depth of 250 mm, minimum sample volume 11 ml.

Item	Size	Approx. constant mm ² /s ² (cSt/s)	Kinematic viscosity range mm ² /s (cSt)
354/1	1	0.008	1.05 minimo
354/2	2	0.003	2.1-3
354/3	3	0.01	3.8-10
354/4	4	0.03	6-30
354/5	5	0.1	20-100
354/6	6	0.3	60-300
354/7	7	1	200-1000
354/8	8	3	600-3000
354/9	9	10	2000-10000

ACCESSORIES ON REQUEST

10-0342 VISCOMETER HOLDER
Metallic

VISCOSITY

CANNON-UBBELOHDE DILUTION

ASTM D445 D446 IP 71 ISO 3104 ISO 3105

For transparent liquids, with certificate

Require liquid bath depth of 305 mm, minimum sample volume of 8 mL can be diluted to 40 mL

Item	Size	Approx. constant mm ² /s ² (cSt/s)	Kinematic viscosity range mm ² /s (cSt)
356/25	25	0.002	0.5-2
356/50	50	0.004	0.8-4
356/75	75	0.008	1.6-8
356/100	100	0.015	3-15
356/150	150	0.035	7-35
356/200	200	0.1	20-100
356/300	300	0.25	50-250
356/350	350	0.5	100-500
356/400	400	1.2	240-1200
356/450	450	2.5	500-2500
356/500	500	8	1600-8000
356/600	600	20	4000-20000

On request uncalibrated with item 356/.../U, where "..." is the size

ACCESSORIES ON REQUEST

10-0356 VISCOMETER HOLDER, , pack of 5 pcs
SH80 rubber

CANNON-UBBELOHDE SEMI-MICRO

ASTM D445 D446 IP 71 ISO 3104 ISO 3105

For transparent liquids, with certificate

Require liquid bath depth of 240 mm, sample volume 1 mL.

Item	Size	Approx. constant mm ² /s ² (cSt/s)	Kinematic viscosity range mm ² /s (cSt)
358/25	25	0.002	0.5-2
358/50	50	0.004	0.8-4
358/75	75	0.008	1.6-8
358/100	100	0.015	3-15
358/150	150	0.035	7-35
358/200	200	0.1	20-100
358/300	300	0.25	50-250
358/350	350	0.5	100-500
358/400	400	1.2	240-1200
358/450	450	2.5	500-2500
358/500	500	8	1600-8000
358/600	600	20	4000-20000

On request uncalibrated with item 358/.../U, where "..." is the size

ACCESSORIES ON REQUEST

10-0356 VISCOMETER HOLDER, , pack of 5 pcs
SH80 rubber

VISCOSITY

BS/IP/RF U-TUBE A SCOLAMENTO ROVESCIATO ASTM D445 D446 IP 71 ISO 3104 ISO 3105

For opaque liquids, with certificate.

Require liquid bath depth of 280 mm, sample volume 7 ml.

Item	Size	Approx. constant mm ² /s ² (cSt/s)	Kinematic viscosity range mm ² /s (cSt)
361/1	1	0.003	0.6-3
361/2	2	0.01	2-10
361/3	3	0.03	6-30
361/4	4	0.1	20-100
361/5	5	0.3	60-300
361/6	6	1	200-1000
361/7	7	3	600-3000
361/8	8	10	2000-10000
361/9	9	30	6000-30000
361/10	10	100	20000-100000
361/11	11	300	60000-300000

ACCESSORIES ON REQUEST

10-0361 VISCOMETER HOLDER, pack of 5 pcs
SH80 rubber

ZEITFUCHS® CROSS-ARM

ASTM D445 D446 D2170 IP 71 ISO 3104 ISO 3105

For transparent and opaque liquids, with certificate.

With permanently attached round metal holder.

Require liquid bath depth of 230 mm, sample volume from 1 to 3 ml. minimum

Item	Size	Approx. constant mm ² /s ² (cSt/s)	Kinematic viscosity range mm ² /s (cSt)
364/1	1	0.003	0.6-3
364/2	2	0.01	2-10
364/3	3	0.03	6-30
364/4	4	0.1	20-100
364/5	5	0.3	60-300
364/6	6	1	200-1000
364/7	7	3	600-3000
364/8	8	10	2000-10000
364/9	9	30	6000-30000
364/10	10	100	20000-100000

VISCOSITY

ZEITFUCHS® TRANSPARENT

ASTM D445 D446 IP 71 ISO 3104 ISO 3105

For transparent liquids, with certificate and metallic viscometer holder

Require liquid bath depth of 292 mm, sample volume 15 ml.

Item	Size	Approx. constant mm ² /s ² (cSt/s)	Kinematic viscosity range mm ² /s (cSt)
366/1	1	0.003	0.6-3
366/2	2	0.01	2-10
366/3	3	0.03	6-30
366/4	4	0.1	20-100
366/5	5	0.3	60-300
366/6	6	1	200-1000
366/7	7	3	600-3000

On request uncalibrated with item 366/.../U, where "... " is the size

Solvent cleaning-unit for washing and drying capillary-glass-tube viscometers. Washes and dries up to 6 capillary tubes at a time. Stainless steel case with 6 independent regulation valves fitted with holding-down spring, air filters, pressure regulator and pressure gauge, to be feed from one external air source. 7.5 litres capacity internal solvent tank with level indicator. Protection cover in stainless steel and window check.

Technical specifications:

- Capacity: about 7.5 liters
- Dimensions: 72x34x82 cm
- Weight: 32 kg.

380 VISCOMETER TUBE CLEANER AND DRYER

ACCESSORIES ON REQUEST

2460/CA3 PUMP

SPARE PARTS

15-0381/MAN PRESSURE GAUGE 0/2.5 BAR
15-0381/REG REGULATION SYSTEM 2 BAR
15-0381/RUB SOLVENT/AIR SWITCH
15-2601 LEVEL INDICATOR
15-0382 SILICONE STOPPER, pack of 6 pcs



380

2012

CLOUD AND POUR POINT

ASTM D97 IP 15 ISO 3016 POUR POINT OF PETROLEUM PRODUCTS

This test method covers and is intended for use on any petroleum product. A procedure suitable for black specimens, cylinder stock, and nondistillate fuel oil

ASTM D2500 IP 219 EN 23015 ISO 3015 CLOUD POINT OF PETROLEUM PRODUCTS

This test method covers only petroleum products and biodiesel fuels that are transparent in layers 40 mm in thickness, and with a cloud point below 49°C (120°F)

ASTM D5853 IP 441 POUR POINT OF CRUDE OILS

This test method covers two procedures for the determination of the pour point temperatures of crude oils down to -36°C.

Resistant structure painted with anti-acid epoxidic products, fitted with 4 wheels with brake. Glossy-black PVC cover with small stand-by covers, aluminium blocks with holes for accommodate the graduated jars, equipped with a hole where the thermometer is placed. Temperature is controlled by digital thermoregulator fitted with a probe PT100 A. Automatic defrosting device under the cover, earth leakage circuit breaker, independent compressors CFC free refrigerant gases are used.

490/HS/140 CLOUD AND POUR POINT REFRIGERATOR UP TO -69°C (4 POSITIONS)

Heating element controlled by an independent switch for a quick return to a ambient temperature.

- Power supply: 230V ±10% 50Hz
- Power: 1300W
- Dimensions: 60x70x100 cm
- Weight: 110 kg

500/S CLOUD AND POUR POINT REFRIGERATOR 0° -18° -33° -51°C (4 POSITIONS FOR EACH TEMPERATURE)

- Power supply: 230V ±10% 50Hz
- Power: 2900W
- Dimensions: 133x72x100 cm
- Weight: 208 kg

510/S CLOUD AND POUR POINT REFRIGERATOR 0° -18° -33°C (4 POSITIONS FOR EACH TEMPERATURE)

- Power supply: 230V ±10% 50Hz
- Power: 2600W
- Dimensions: 104x72x100 cm
- Weight: 156 kg.

520/S CLOUD AND POUR POINT REFRIGERATOR 0° -18° -33° -51° -69°C (4 POSITIONS FOR EACH TEMPERATURE)

- Power supply: 230V ±10% 50Hz
- Power: 3700W
- Dimensions: 180x72x100 cm
- Weight: 285 kg

530/S CLOUD AND POUR POINT REFRIGERATOR +50° 0° -18° -33° -51° -69°C (4 POSITIONS FOR EACH TEMPERATURE)

- Power supply: 230V ±10% 50Hz
- Power: 3900W
- Dimensions: 210x72x100 cm
- Weight: 335 kg

ACCESSORIES ON REQUEST

10-0491	TEST JAR SET, pack of 4 pcs Graduated glassware ASTM. Complete with cork for thermometer, o-ring and cork disk for rest test jar
10-0490/S	FRAMEWORK FOR 490/HS/140 For lead up to 150 cm
10-0500/S	FRAMEWORK FOR cm 500/S For lead up to 150 cm
10-0510/S	FRAMEWORK FOR PER 510/S For lead up to 150 cm
10-0520/S	FRAMEWORK FOR PER 520/S For lead up to 150 cm
10-0530/S	FRAMEWORK FOR PER 530/S For lead up to 150 cm
10-0332	DIGITAL STOPWATCH 7 digit LCD, max.10 hours, 1/100 sec, digit h=8 mm
15-1441/A	SUPPORT FOR VESSEL ASTM D130 D5853 For 4 pressure vessel
10-1441/B	PRESSURE VESSEL ASTM D130 D5853 Made of stainless steel, tested at 10 bar/21 psi
1230	WATER/OIL BATH Structure made of stainless steel, temperature regulation by digital thermoregulator PID with PT100 probe class A and overtemperature alarm, stainless steel heater, cooling coil, motor stirrer, insulated double wall, safety internal level for low liquid with warning lamp. Technical specifications: - Temperature: from ambient to 120°C (248°F) ±0.1°C - Bath capacity: 5 about liters - Power supply: 230V ±10% 50/60Hz - Power: 1200W - Dimensions: 27x39x45 cm - Weight: 8 kg
T-AS5C	THERMOMETER ASTM 5C IP 1C
T-AS6C	THERMOMETER ASTM 6C IP 2C
T-AS61C	THERMOMETER ASTM 61C IP63C

CONSUMABLES x 2 YEARS

15-0491	TEST JAR, pack of 4 pcs x2
15-0492	CORK, pack of 4 pcs x2
15-0493	CORK DISC, pack of 4 pcs x2
15-0494	O-RING, pack of 4 pcs x2

SPARE PARTS

14-0006	PROBE PT100A
11-0490	HEATER (for 490/HS/140)
16-0005	DIGITAL THERMOREGULATOR
11-0017	DEFROSTING HEATER 10W
11-0018	DEFROSTING HEATER 15W
15-0016/220	RELAY
15-0021	TIMER
15-0004	BIPOLAR GREEN SWITCH
15-0019	EARTH LEAKAGE CIRCUIT BREAKER
15-2412	EARTH LEAKAGE CIRCUIT BREAKER (for 520/S and 530/S)

CLOUD AND POUR POINT



1 places conventional model with dry ice (CO₂) (not included) external cooling, consisting of Dewar flask fully silvered with metal protection and PVC cover, metal air jacket for support test jar.

Technical specifications:

- Temperature: up to -69°C (-92°F) with dry ice
- Dimensions: Ø130x310 mm
- Weight: 1.5 kg.

540 CONVENTIONAL CLOUD AND POUR POINT APPARATUS



ACCESSORIES ON REQUEST

- | | |
|---------|---|
| 10-0491 | TEST JAR SET, pack of 4 pcs
Graduated glassware ASTM.
Complete with cork for thermometer, o-ring and
cork disk for rest test jar |
| 10-0332 | DIGITAL STOPWATCH
7 digit LCD, max.10 hours, 1/100 sec,
digit h=8 mm |
| T-AS5C | THERMOMETER ASTM 5C IP 1C |
| T-AS6C | THERMOMETER ASTM 6C IP 2C |
| T-AS61C | THERMOMETER ASTM 61C IP 63C |

CONSUMABLES x 2 YEARS

- | | |
|---------|-----------------------------|
| 15-0491 | TEST JAR, pack of 4 pcs x2 |
| 15-0492 | CORK, pack of 4 pcs x2 |
| 15-0493 | CORK DISC, pack of 4 pcs x2 |
| 15-0494 | O-RING, pack of 4 pcs x2 |

SPARE PARTS

- | | |
|---------|----------------|
| 15-0540 | DEWAR Ø100x240 |
| 15-0541 | METAL JACKET |
| 15-0542 | BRASS SUPPORT |

BOILING POINT

ASTM D1120 BOILING POINT OF ENGINE COOLANTS

This test method covers the determination of the equilibrium boiling point of engine coolants. The equilibrium boiling point indicates the temperature at which the sample will start to boil in a cooling system under equilibrium conditions at atmospheric pressure.

Consisting of a heating mantle, a 100 ml flask having a neck with a 19/38 standard-taper, female ground-glass joint and a 10 mm outside diameter side-entering tube, so located as to permit the end of the thermometer device to be directly centered in the flask 6.5 mm from the bottom, a condenser having a jacket 200 mm in length with the bottom end of the condenser have a 19/38 standard-taper, drip-tip, male ground-glass joint.

Technical specifications:

- Power supply: 230V \pm 10% 50Hz
- Power: 100W
- Dimensions: 15x15x12 cm
- Weight: 3 kg

2320 BOILING POINT

ACCESSORIES ON REQUEST

10-2321	SILICON CARBIDE GRAINS, pack of 100 g
10-0332	DIGITAL STOPWATCH 7 digit LCD, max.10 hours, 1/100 sec, digit h=8 mm
T-AS2C	THERMOMETER ASTM 2C

SPARE PARTS

1290/100	HEATING MANTLE
15-2321	FLASK, 100 ml
15-2322	CONDENSER
15-2323	STOPPER FOR THERMOMETER



SOLIDIFICATION POINT

ASTM D852 SOLIDIFICATION POINT OF BENZENE

Consisting of: 1 cooling bath cup (1 liter dewar with Ertalon stand), 1 cover for dewar, 1 air jacket tube 25x150 mm, 1 inner test tube 15x125 mm, stoppers, stirrer wire in stainless steel Ø1 mm

2340 SOLIDIFICATION POINT OF BENZENE

ACCESSORIES ON REQUEST

T-AS112C THERMOMETER ASTM 112C

CONSUMABLES x 2 YEARS

15-2347 WIRE STIRRER x4

SPARE PARTS

15-2341 DEWAR

10-1441/D AIR JACKET 25x150 mm, pack of 10 pcs

15-2343 INNER CONTAINER 15x125 mm, pack of 3 pcs

15-2344 SERIES OF 3 STOPPERS



FREEZING POINT

ASTM D2386 IP 16 ISO 3013 DIN 51421 (obs) FREEZING POINT OF AVIATION FUELS

This test method covers the determination of the temperature below which solid hydrocarbon crystals may form in aviation turbine fuels and aviation gasoline.

2370 MANUAL FREEZING POINT

Consisting of: tripod stand with clamp the jacketed sample tube into the Dewar flask at the level required from method; Dewar flask Ø75x280 mm. int. for cooling medium, with stainless steel support; jacketed sample tube Dewar Ø20x234 mm. int.; silicone stopper with hole for thermometer and supporting the brass moisture-proof collar (with silica gel and glass wool) through which the manual brass stirrer passes.

2370/SEM SEMI-AUTOMATIC FREEZING POINT

Base painted with anti-acid epoxidic products supporting Dewar flask Ø75x280 mm. int. for cooling medium, with stainless steel support; jacketed sample tube Dewar Ø20x234 mm. int.; cork stopper with two holes one for thermometer and one for supporting the brass moisture-proof collar (with silica gel and glass wool) through which the manual brass stirrer passes joined to a geared motor for automatic stirrer at 70 rpm. The base accommodate the stirrer switch.

Technical specifications:

- Power supply: 230V ±10% 50 Hz
- Dimensions: 26x35x115 cm
- Weight: 11 kg

2370/SEM/2 SEMI-AUTOMATIC FREEZING POINT (2 POSITIONS)

2 places stand-alone with base painted with anti-acid epoxidic products supporting two Dewar flask Ø75x280 mm. int. for cooling medium, with stainless steel support, each with; jacketed sample tube Dewar Ø20x234 mm. int.; cork stopper with two holes one for thermometer and one for supporting the brass moisture-proof collar (with silica gel and glass wool) through which the manual brass stirrer passes joined to a geared motor for automatic stirrer at 70 rpm. The base accommodate two stirrer switch.

Technical specifications:

- Power supply: 230V ±10% 50 Hz
- Dimensions: 60x40x115 cm
- Weight: 38 kg



ACCESSORIES ON REQUEST

T-AS114C THERMOMETER ASTM 114C IP 14C

CONSUMABLES x 2 YEARS

15-2371 JACKETED SAMPLE TUBE x2
Internal Ø20x234 mm, similar Dewar
15-2372 WIRE STIRRER x4
Made of brass, with three-loop spiral at the bottom

SPARE PARTS

15-2374 STOPPER, PACK OF 2 PCS
Made of silicone with two holes: one for thermometer and one for stirrer
15-2375 MOISTURE-PROOF
Collar through which the stirrer passes
Made of brass, filled with silica gel and glass wool
15-2373 DEWAR Ø75x280 mm
15-2384 CLAMP
15-2070/MOR DOUBLE CLAMP
15-0004 BIPOLAR GREEN SWITCH
12-0014/M MOTOR
15-AZLAM3 CARD MOTOR, 3A



2006

FREEZING POINT

ASTM D1177 FREEZING POINT OF AQUEOUS ENGINE COOLANTS

This test method covers the determination of the freezing point of an aqueous engine coolant solution in the laboratory.

Base painted with anti-acid epoxidic products supporting Dewar flask Ø100x290mm. int. for cooling medium, fully silvered with metal protection; 200 mL freezing tube Dewar; cork with three holes one for PT100A probe one for stirrer and one for introducing wire for seeding; five coil stirrer made of stainless steel wire joined to a geared motor for automatic stirrer at 70 rpm.

The base accommodate the main switch, stirrer switch and digital thermometer plug in to PT100A probe.

2380 FREEZING POINT

Technical specifications:

- Power supply: 230V ±10% 50Hz
- Dimensions: 26x35x85 cm
- Weight: 8 kg

2380/2 FREEZING POINT (2 POSITIONS)

Technical specifications:

- Power supply: 230V ±10% 50Hz



CONSUMABLES x 2 YEARS

15-2381	FREEZING TUBE x2 200 ml., Dewar
15-2382	WIRE STIRRER x4 Made of stainless steel, with five-loop spiral at the bottom
15-2383	STOPPER, pack of 2 pcs Made of cork, with 3 holes

SPARE PARTS

15-2385	DEWAR
14-0002	PROBE PT100A
16-0005	DIGITAL THERMOMETER
15-0004	BIPOLAR GREEN SWITCH
15-0005	BIPOLAR YELLOW SWITCH
15-2384	CLAMP
12-0014/M	MOTOR
15-AZLAM3	CARD MOTOR, 3A

Resistant structure painted with anti-acid epoxidic products, fitted with 4 wheels with brake. Glossy-black PVC cover with small stand-by covers aluminium block with 1 hole for accommodate the 200ml freezing tube, equipped with a hole where the thermometer is placed, heating element controlled by a independent switch for a quick return to a ambient temperature. Temperature is controlled by digital thermoregulator fitted with a probe PT100 A. Automatic defrosting device under the cover, earth leakage circuit breaker, double stage compressor CFC free refrigerant gases are used.

Consisting of: 200ml freezing tuber; cork with three holes one for PT100A probe one for stirrer and one for introducing wire for seeding; five coil stirrer made of stainless steel wire joined to a geared motor for automatic stirrer at 70 rpm.

The temperature of sample is obtain by a PT100A probe plug in to a digital thermometer.

Technical specifications:

- Temperature: from ambient to -70°C (-94°F)
- Power supply: 230V ±10% 50Hz
- Power: 1300W
- Dimensions: 60x70x160 cm
- Weight: 118 kg

2380/SEM SEMI-AUTOMATIC FREEZING POINT

CONSUMABLES x 2 YEARS

15-2381	FREEZING TUBE x2 200 ml., Dewar
15-2382	WIRE STIRRER x4 Made of stainless steel, with five-loop spiral at the bottom
15-2383	STOPPER, pack of 2 pcs Made of cork, with 3 holes

SPARE PARTS

11-0490	HEATER
14-0002	PROBE PT100A
14-0006	PROBE PT100A (for refrigerator bench)
16-0005	DIGITAL THERMOMETER
11-0018	DEFROSTING HEATER 15W
15-0004	BIPOLAR GREEN SWITCH
15-0005	BIPOLAR YELLOW SWITCH
15-2384	CLAMP
12-0014/M	MOTOR
15-AZLAM3	CARD MOTOR, 3A
15-0019	EARTH LEAKAGE CIRCUIT BREAKER
15-0021	TIMER

COLD FILTER PLUGGING POINT

ASTM D6371 IP 309 EN 116 DIN 51428 (obs) COLD FILTER PLUGGING POINT OF DIESEL AND HEATING FUELS
This test method covers the determination of the cold filter plugging point (CFPP) temperature of diesel and domestic heating fuels

2540 COLD FILTER PLUGGING POINT - CFPP

PVC structure fitted with: dewar flask with cover, brass jacket Ø48x115 mm outside, test jar Ø31x125 mm flat bottomed and mark at 45 ml level, insulating ring thickness 6 mm, to be placed in the bottom of the jacket, two spacers to be placed as around the test jar to provide insulation for the test jar from the sides of the jacket, a supporting ring for suspend the jacket, a pipet with a calibration mark corresponding to a contained volume of 20 mL at a point 149 mm from the bottom of the pipet, a metallic unit filter, a stopper with three holes one for thermometer one for pipet and one for vent, two 5 liters bottle with stopper, stopcock and U-manometer.

Technical specifications:

- Dimensions: 330x500 mm (Øxh)
- Weight: 9 kg.

ACCESSORIES ON REQUEST

2460/RC4D	VACUUM PUMP
10-0332	DIGITAL STOPWATCH 7 digit LCD, max.10 hours, 1/100 sec, digit h=8 mm
T-AS5C	THERMOMETER ASTM 5C IP 1C
T-AS6C	THERMOMETER ASTM 6C IP 2C x2

CONSUMABLES x 2 YEARS

15-2541	TEST JAR, 45 ml x2
15-2544/F	FILTER DISK, pack of 5 pcs x4
15-2544/OF	O-RING FOR THE FILTER SIEVE, pack of 5 pcs x1
15-2544/OP	O-RING FOR PIPETTE, pack of 5 pcs x1

2540/SEM SEMI-AUTOMATIC COLD FILTER PLUGGING POINT - CFPP

Resistant structure painted with anti-acid epoxidic products, fitted with 4 wheels with brake. Glossy-black PVC cover with small stand-by covers aluminium block with 1 hole for accommodate the test jar, equipped with a hole where the thermometer is placed, heating element controlled by a independent switch for a quick return to a ambient temperature. Temperature is controlled by digital thermoregulator fitted with a probe PT100 A. Automatic defrosting device under the cover, earth leakage circuit breaker, double stage compressor CFC free refrigerant gases are used. Brass jacket Ø48x115 mm outside, test jar Ø31x125 mm flat bottomed and mark at 45 ml level, insulating ring thickness 6mm, to be placed in the bottom of the jacket, two spacers to be placed as around the test jar to provide insulation for the test jar from the sides of the jacket, a supporting ring for suspend the jacket, a pipet with a calibration mark corresponding to a contained volume of 20 mL at a point 149 mm from the bottom of the pipet, a metallic unit filter, a stopper with three holes one for thermometer one for pipet and one for vent, two 5 liters bottle with stopper, stopcock and U-manometer.

Technical specifications:

- Temperature: from ambient to -70°C (-94°F)
- Power supply: 230V ±10% 50Hz
- Power: 1300W
- Dimensions: 60x70x160 cm
- Weight: 118 kg

SPARE PARTS

15-2540	U-MANOMETER
15-2541/S	SPACE
15-2542	BRASS JACKET
15-2543	PIPET
15-2544	FILTER UNIT
15-2545	STOPPER FOR PIPET
15-2546	3-WAY GLASS STOPCOCK
15-2547	GLASS BOTTLE, 5 l
15-2548/2	2 HOLES STOPPER FOR BOTTLE
15-2548/3	3 HOLES STOPPER FOR BOTTLE
15-2549	GLASS LINK, pack of 4 pcs
15-2549/P	AIR VENT TUBE FOR BOTTLE
15-2541/D	DEWAR



DENSITY

ASTM D287 API GRAVITY OF CRUDE PETROLEUM AND PETROLEUM PRODUCTS

This test method covers the determination by means of a glass hydrometer in conjunction with a series of calculations of the API gravity of crude petroleum and petroleum products normally handled as liquids and having a Reid vapor pressure (ASTM D323) of 101.325 kPa (14.696 psi) or less.

ASTM D1298 IP 160 ISO 3675 DENSITY, RELATIVE DENSITY, OR API GRAVITY OF CRUDE PETROLEUM AND LIQUID PETROLEUM PRODUCTS BY HYDROMETER METHOD

This test method covers the laboratory determination using a glass hydrometer in conjunction with a series of calculations, of the density, relative density, or API gravity of crude petroleum, petroleum products, or mixtures of petroleum and nonpetroleum products normally handled as liquids, and having a Reid vapor pressure of 101.325 kPa (14.696 psi) or less.

Borosilicate glass jar with cover with 5 holes Ø55 mm. or 4 Ø66 mm, leakage protection vessel made of tempered glass, included with cork plate and stainless steel base. Stainless steel control box on the cover with digital thermoregulator PID with PT100 probe class A and overtemperature alarm, stainless steel heater, cooling coil, motor stirrer, safety internal level for low liquid with warning lamp, with test tubes blocking-system and stand-by stainless steel covers.

Technical specifications:

- Temperature: From ambient to +150°C (302°F)
- Stability: ±0.1°C
- Power supply: 230V ±10% 50/60Hz

550/300 DENSITY BATH

For hydrometer cylinders Ø54x300 mm

- Capacity: 16 liters about
- Power: 1200W
- Dimensions: 35x35x55 cm
- Weight: 20 kg

550/450 DENSITY BATH

For hydrometer cylinder Ø65x420 mm

- Capacity: 23 liters about
- Power: 2200W
- Dimensions: 35x35x70 cm
- Weight: 30 kg



550/300

2013

ACCESSORIES ON REQUEST

10-0485/20	CIRCULATION COOLER UP TO -20°C (-4°F)
10-0554	HYDROMETER CYLINDER Ø65x420 mm, pack of 4 pcs
10-0556	HYDROMETER CYLINDER Ø54x300 mm, pack of 5 pcs
10-0555	HYDROMETER CYLINDER Bench model with foot, 1000 ml.
T-AS12C	THERMOMETER ASTM 12C IP 64C
T-AS17C	THERMOMETER ASTM 17C
T-AS22C	THERMOMETER ASTM 22C
T-AS63C	THERMOMETER ASTM 63C

CONSUMABLES x 2 YEARS

10-0554	HYDROMETER CYLINDER Ø65x420 mm, pack of 4 pcs
10-0556	HYDROMETER CYLINDER Ø54x300 mm, pack of 5 pcs

SPARE PARTS

18-0001	JAR Ø270x330 mm., (for 550/300)
18-0002	JAR Ø270x450 mm., (for 550/450)
18-0003/CONT/330	LEAKAGE PROTECTION VESSEL, (for 550/300)
18-0003/CONT/450	LEAKAGE PROTECTION VESSEL, (for 550/450)
14-0002	PROBE PT100A L=200 mm
11-0012/19	HEATER (per 550/300)
11-0016	HEATER (per 550/450)
16-0005	DIGITAL THERMOREGULATOR
15-0015	STATIC RELAY
15-0004	BIPOLAR GREEN SWITCH
12-0001	MOTOR STIRRER

DENSITY

DENSITY HYDROMETER BS 718 DIN 12791 SERIES L20

Without thermometer, div.0.0002 g/cm³, ref. temperature 20°C, length 430 mm

Art.	Type	Range g/cm ³
550/L20/068	L20-068	0,6800-0,7000
550/L20/070	L20-070	0,7000-0,7200
550/L20/072	L20-072	0,7200-0,7400
550/L20/074	L20-074	0,7400-0,7600
550/L20/076	L20-076	0,7600-0,7800
550/L20/078	L20-078	0,7800-0,8000
550/L20/080	L20-080	0,8000-0,8200
550/L20/082	L20-082	0,8200-0,8400
550/L20/084	L20-084	0,8400-0,8600
550/L20/086	L20-086	0,8600-0,8800
550/L20/088	L20-088	0,8800-0,9000
550/L20/090	L20-090	0,9000-0,9200
550/L20/092	L20-092	0,9200-0,9400
550/L20/094	L20-094	0,9400-0,9600
550/L20/096	L20-096	0,9600-0,9800
550/L20/098	L20-098	0,9800-1,0000
550/L20/100	L20-100	1,0000-1,0200
550/L20/102	L20-102	1,0200-1,0400
550/L20/104	L20-104	1,0400-1,0600
550/L20/106	L20-106	1,0600-1,0800
550/L20/108	L20-108	1,0800-1,1000

DENSITY HYDROMETER BS 718 DIN 12791 SERIES L50

Without thermometer, div.0.0005 g/cm³, ref. temperature 20°C, length 335 mm

Art.	Type	Range g/cm ³
550/L50/060	L50-060	0,600-0,650
550/L50/065	L50-065	0,650-0,700
550/L50/070	L50-070	0,700-0,750
550/L50/075	L50-075	0,750-0,800
550/L50/080	L50-080	0,800-0,850
550/L50/085	L50-085	0,850-0,900
550/L50/090	L50-090	0,900-0,950
550/L50/095	L50-095	0,950-1,000
550/L50/100	L50-100	1,000-1,050
550/L50/105	L50-105	1,050-1,100
550/L50/110	L50-110	1,100-1,150
550/L50/115	L50-115	1,150-1,200
550/L50/120	L50-120	1,200-1,250
550/L50/125	L50-125	1,250-1,300
550/L50/130	L50-130	1,300-1,350
550/L50/135	L50-135	1,350-1,400
550/L50/140	L50-140	1,400-1,450
550/L50/145	L50-145	1,450-1,500
550/L50/150	L50-150	1,500-1,550
550/L50/155	L50-155	1,550-1,600
550/L50/160	L50-160	1,600-1,650
550/L50/165	L50-165	1,650-1,700
550/L50/170	L50-170	1,700-1,750
550/L50/175	L50-175	1,750-1,800
550/L50/180	L50-180	1,800-1,850
550/L50/185	L50-185	1,850-1,900
550/L50/190	L50-190	1,900-1,950
550/L50/195	L50-195	1,950-2,000

DENSITY HYDROMETER BS 718 DIN 12791 SERIES L50 SP

Without thermometer, div.0.0005 g/cm³, ref. temperature 15°C, length 335 mm.

Art.	Type	Range g/cm ³
550/L50BS/060	L50-060	0,600-0,650
550/L50BS/065	L50-065	0,650-0,700
550/L50BS/070	L50-070	0,700-0,750
550/L50BS/075	L50-075	0,750-0,800
550/L50BS/080	L50-080	0,800-0,850
550/L50BS/085	L50-085	0,850-0,900
550/L50BS/090	L50-090	0,900-0,950
550/L50BS/095	L50-095	0,950-1,000
550/L50BS/100	L50-100	1,000-1,050
550/L50BS/105	L50-105	1,050-1,100

DENSITY

DENSITY HYDROMETER BS 718 DIN 12791 SERIES M50

Without thermometer, div.0.001 g/cm³, ref. temperature 20°C, length 270 mm.

Art.	Type	Range g/cm ³
550/M50/060	M50-060	0,600-0650
550/M50/065	M50-065	0,650-0,700
550/M50/070	M50-070	0,700-0,750
550/M50/075	M50-075	0,750-0,800
550/M50/080	M50-080	0,800-0,850
550/M50/085	M50-085	0,850-0,900
550/M50/090	M50-090	0,900-0,950
550/M50/095	M50-095	0,950-1,000
550/M50/100	M50-100	1,000-1,050
550/M50/105	M50-105	1,050-1,100
550/M50/110	M50-110	1,100-1,150
550/M50/115	M50-115	1,150-1,200
550/M50/120	M50-120	1,200-1,250
550/M50/125	M50-125	1,250-1,300
550/M50/130	M50-130	1,300-1,350
550/M50/135	M50-135	1,350-1,400
550/M50/140	M50-140	1,400-1,450
550/M50/145	M50-145	1,450-1,500
550/M50/150	M50-150	1,500-1,550
550/M50/155	M50-155	1,550-1,600
550/M50/160	M50-160	1,600-1,350
550/M50/165	M50-165	1,650-1,700
550/M50/170	M50-170	1,700-1,750
550/M50/175	M50-175	1,750-1,800
550/M50/180	M50-180	1,800-1,850
550/M50/185	M50-185	1,850-1,900
550/M50/190	M50-190	1,900-1,950
550/M50/195	M50-195	1,950-2000

DENSITY HYDROMETER BS 718 DIN 12791 SERIES M100

Without thermometer, div.0.002 g/cm³, ref. temperature 20°C, length 250 mm.

Art.	Type	Range g/cm ³
550/M100/060	M100-060	0,600-0,700
550/M100/070	M100-070	0,700-0,800
550/M100/080	M100-080	0,800-0,900
550/M100/090	M100-090	0,900-1,000
550/M100/100	M100-100	1,000-1,100
550/M100/110	M100-110	1,100-1,200
550/M100/120	M100-120	1,200-1,300
550/M100/130	M100-130	1,300-1,400
550/M100/140	M100-140	1,400-1,500
550/M100/150	M100-150	1,500-1,600
550/M100/160	M100-160	1,600-1,700
550/M100/170	M100-170	1,700-1,800
550/M100/180	M100-180	1,800-1,900
550/M100/190	M100-190	1,900-2,000

DENSITY HYDROMETER BS 718 DIN 12791 SERIES M50 SP

Without thermometer, div.0.001 g/cm³, ref. temperature 15°C, length 270 mm.

Art.	Type	Range g/cm ³
550/M50SP/060	M50-060	0,600-0,650
550/M50SP/065	M50-065	0,650-0,700
550/M50SP/070	M50-070	0,700-0,750
550/M50SP/075	M50-075	0,750-0,800
550/M50SP/080	M50-080	0,800-0,850
550/M50SP/085	M50-085	0,850-0,900
550/M50SP/090	M50-090	0,900-0,950
550/M50SP/095	M50-095	0,950-1,000
550/M50SP/100	M50-100	1,000-1,050
550/M50SP/105	M50-105	1,050-1,100

DENSITY

DENSITY HYDROMETER BS 718 DIN 12791 SERIES S50

Without thermometer, div.0.002 g/cm³, ref. temperature 20°C, length 190 mm.

Art.	Type	Range g/cm ³
550/S50/060	S50-060	0,60-0,65
550/S50/065	S50-065	0,65-0,70
550/S50/070	S50-070	0,70-0,75
550/S50/075	S50-075	0,75-0,80
550/S50/080	S50-080	0,80-0,85
550/S50/085	S50-085	0,85-0,90
550/S50/090	S50-090	0,90-0,95
550/S50/095	S50-095	0,95-1,00
550/S50/100	S50-100	1,00-1,05
550/S50/105	S50-105	1,05-1,10
550/S50/110	S50-110	1,10-1,15
550/S50/115	S50-115	1,15-1,20
550/S50/120	S50-120	1,20-1,25
550/S50/125	S50-125	1,25-1,30
550/S50/130	S50-130	1,30-1,35
550/S50/135	S50-135	1,35-1,40
550/S50/140	S50-140	1,40-1,45
550/S50/145	S50-145	1,45-1,50
550/S50/150	S50-150	1,50-1,55
550/S50/155	S50-155	1,55-1,60
550/S50/160	S50-160	1,60-1,65
550/S50/165	S50-165	1,65-1,70
550/S50/170	S50-170	1,70-1,75
550/S50/175	S50-175	1,75-1,80
550/S50/180	S50-180	1,80-1,85
550/S50/185	S50-185	1,85-1,90
550/S50/190	S50-190	1,90-1,95
550/S50/195	S50-195	1,95-1,00

DENSITY HYDROMETER BS 718 DIN 12791 SERIES S50 SP

Without thermometer, div.0.001 g/cm³, ref. temperature 15°C, length 190 mm.

Art.	Type	Range g/cm ³
550/S50SP/060	S50-060	0,60-0,65
550/S50SP/065	S50-065	065-0,70
550/S50SP/070	S50-070	0,70-0,75
550/S50SP/075	S50-075	0,75-0,80
550/S50SP/080	S50-080	0,80-0,85
550/S50SP/085	S50-085	0,85-0,90
550/S50SP/090	S50-090	0,90-0,95
550/S50SP/095	S50-095	0,95-1,00
550/S50SP/100	S50-100	1,00-1,05
550/S50SP/105	S50-105	1,05-1,10

DENSITY

HYDROMETER API ASTM

Without thermometer, div.0,1°API, ref. temperature 60°F

Art.	Type	Range °API	Lenght mm.
550/1H/62	1H-62	-1 +11	330
550/2H/62	2H-62	9 +21	330
550/3H/62	3H-62	19 +31	330
550/4H/62	4H-62	29 +41	330
550/5H/62	5H-62	39 +51	330
550/6H/62	6H-62	49 +61	330
550/7H/62	7H-62	59 +71	330
550/8H/62	8H-62	69 +81	330
550/9H/62	9H-62	79+ 91	330
550/10H/62	10H-62	89 +101	330
550/21H/62	21H-62	0 +6	163
550/22H/62	22H-62	5 +11	163
550/23H/62	23H-62	10 +16	163
550/24H/62	24H-62	15 +21	163
550/25H/62	25H-62	20 +26	163
550/26H/62	26H-62	25 +31	163
550/27H/62	27H-62	30 +36	163
550/28H/62	28H-62	35 +41	163
550/29H/62	29H-62	40 +46	163
550/30H/62	30H-62	45 +51	163
550/31H/62	31H-62	50 +56	163
550/32H/62	32H-62	55 +61	163
550/33H/62	33H-62	60 +66	163
550/34H/62	34H-62	65 +71	163
550/35H/62	35H-62	70 +76	163
550/36H/62	36H-62	75 +81	163
550/37H/62	37H-62	80 +86	163
550/38H/62	38H-62	85 +91	163
550/39H/62	39H-62	90 +96	163
550/40H/62	40H-62	95 +101	163

HYDROMETER API ASTM

With thermometer 0 +150°F, div.0,1°API, ref. temperature 60°F

Art.	Type	Range °API	Lunghezza mm.
550/51H/62	51H-62	-1 +11	380
550/52H/62	52H-62	9 +21	380
550/53H/62	53H-62	19 +31	380
550/54H/62	54H-62	29 +41	380
550/55H/62	55H-62	39 +51	380
550/56H/62	56H-62	49 +61	380
550/57H/62	57H-62	59 +71	380
550/58H/62	58H-62	69 +81	380
550/59H/62	59H-62	79 +91	380
550/60H/62	60H-62	89 +101	380

DENSITY

HYDROMETER ASTM

Without thermometer, div.0,0005 sp gr, ref. temperature 60/60°F, length 330 mm.

Art.	Type	Range
550/82H/62	82H-62	0.650-0.700
550/83H/62	83H-62	0.700-0.750
550/84H/62	84H-62	0.750-0.800
550/85H/62	85H-62	0.800-0.850
550/86H/62	86H-62	0.850-0.900
550/87H/62	87H-62	0.900-0.950
550/88H/62	88H-62L	0.950-1.000
550/89H/62	89H-62L	1.000-1.050
550/90H/62	90H-62L	1.050-1.100
550/98H/62	98H-62 alcohol	0.950-1.000
550/111H/62	111H-62H	1.000-1.050
550/112H/62	112H-62H	1.050-1.100
550/113H/62	113H-62	1.100-1.150
550/114H/62	114H-62	1.150-1.200
550/115H/62	115H-62	1.200-1.250
550/116H/62	116H-62	1.250-1.300
550/117H/62	117H-62	1.300-1.350
550/118H/62	118H-62	1.350-1.400
550/119H/62	119H-62	1.400-1.450
550/120H/62	120H-62	1.450-1.500

HYDROMETER ASTM

Without thermometer, div.0,001 sp gr, ref. temperature 60/60°F, length 260 mm.

Art.	Type	Range
550/102H/62	102H-62	0.650-0.700
550/103H/62	103H-62	0.700-0.750
550/104H/62	104H-62	0.750-0.800
550/105H/62	105H-62	0.800-0.850
550/106H/62	106H-62	0.850-0.900
550/107H/62	107H-62	0.900-0.950
550/108H/62	108H-62	0.950-1.000
550/125H/62	125H-62	1.000-1.050
550/126H/62	126H-62	1.050-1.100
550/127H/62	127H-62	1.100-1.150
550/128H/62	128H-62	1.150-1.200
550/129H/62	129H-62	1.200-1.250
550/130H/62	130H-62	1.250-1.300
550/131H/62	131H-62	1.300-1.350
550/132H/62	132H-62	1.350-1.400
550/133H/62	133H-62	1.400-1.450
550/134H/62	134H-62	1.450-1.500
550/135H/62	135H-62	1.500-1.550
550/136H/62	136H-62	1.550-1.600
550/137H/62	137H-62	1.600-1.650
550/138H/62	138H-62	1.650-1.700
550/139H/62	139H-62	1.700-1.750
550/140H/62	140H-62	1.750-1.800
550/141H/62	141H-62	1.800-1.850

HYDROMETER ASTM

With thermometer -20 +65°C div.1°, div.0.5 kg/m³, ref. temperature 15°C, length 380 mm

Art.	Type	Range
550/300H/82	300H-82	600-650
550/301H/82	301H-82	650-700
550/302H/82	302H-82	700-750
550/303H/82	303H-82	750-800
550/304H/82	304H-82	800-850
550/305H/82	305H-82	850-900
550/306H/82	306H-82	900-950
550/307H/82	307H-82	950-1000
550/308H/82	308H-82	1000-1050
550/309H/82	309H-82	1050-1100

HYDROMETER ASTM

Without thermometer, div.0.5 kg/m³, ref. temperature 15°C, length 330 mm

Art.	Type	Range
550/311H/82	311H-82	600-650
550/312H/82	312H-82	650-700
550/313H/82	313H-82	700-750
550/314H/82	314H-82	750-800
550/315H/82	315H-82	800-850
550/316H/82	316H-82	850-900
550/317H/82	317H-82	900-950
550/318H/82	318H-82	950-1000
550/319H/82	319H-82	1000-1050
550/320H/82	320H-82	1050-1100

PENETRATION

PENETROMETER

ASTM D5 IP 49 PENETRATION OF BITUMINOUS MATERIAL

This test method covers determination of the penetration of semi-solid and solid bituminous materials

EN 1426 BITUMEN AND BITUMINOUS BINDERS - DETERMINATION OF NEEDLE PENETRATION

For determining the consistency of bitumen and bituminous binders. Normal procedure is described for penetrations up to 330 but for penetrations above this value, up to 500, different operating parameters are necessary

ASTM D217 IP 50 CONE PENETRATION LUBRICATING GREASE

These test methods cover four procedures for measuring the consistency of lubricating greases by the penetration of a cone of specified dimensions, mass, and finish.

ASTM D937 IP 179 ISO 2137 DIN 51580 CONE PENETRATION OF PETROLATUM

This test method covers measuring with a penetrometer the penetration of petrolatum as an empirical measure of consistency

ASTM D1321 IP 376 DIN 51579 NEEDLE PENETRATION OF PETROLEUM WAXES

This test method covers the empirical estimation of the consistency of waxes derived from petroleum by measurement of the extent of penetration of a standard needle. This test method is applicable to waxes having a penetration of not greater than 250

ASTM D1403 IP 310 ISO 2137 CONE PENETRATION OF LUBRICATING GREASE USING 1/4 AND 1/2 SCALE CONE EQUIPMENT

These test methods cover two procedures for measuring the consistency of small samples of lubricating greases by penetration of a 1/4-scale cone or a 1/2-scale cone. These test methods include procedures for the measurement of unworked and worked penetrations.

ASTM D2884 YIELD STRESS OF HETEROGENEOUS PROPELLANTS BY CONE PENETRATION METHOD

This test method covers determination of the yield stress of heterogeneous propellants, both of the gel and emulsion types, containing from 0 to 70 % solid additives

Aluminum anodized base with inset spirit level and adjustable feet, solid stainless steel column supporting a calibrated dial with 360 divisions corresponding to 1/10 of millimeter for penetration up to 720, release button with manual halting function. Micrometric regulation, magnifying glass and check light.

Technical specifications:

- Dimensions: 26x26x51 cm
- Weight: 7 kg

650 MANUAL PRECISION PENETROMETER

Aluminum anodized base with inset spirit level and adjustable feet, solid stainless steel column supporting a calibrated dial with 360 divisions corresponding to 1/10 of millimeter for penetration up to 720, release button by a low voltage solenoid, controlled on its turn by a timer. Micrometric regulation, magnifying glass and check light.

Technical specifications:

- Power supply: 230V ±10% 50Hz
- Power: 100W
- Dimensions: 26x26x62 cm
- Weight: 9 kg

650/SEM SEMI-AUTOMATIC PRECISION PENETROMETER



PENETRATION

TEST SETS	
ASTM D5 <350	10-0652, 10-0661/47, 10-0651/50, 10-0651/100, 10-0660/5535, 10-0660/7570, 10-0660/M, 722/PEN, T-AS63C, T-AS64C, T-AS17C
ASTM D5 >350	10-0652/60, 10-0661/47, 10-0651/50, 10-0651/100, 10-0660/5570, 10-0660/M, 722/PEN, T-AS63C, T-AS64C, T-AS17C
EN 1426	10-0652, 10-0661/47, 10-0660/5535, 10-0660/7045, 10-0660/7060, 10-0660/AN20, 10-0660/AN30, 10-0660/M, 722/PEN, T-AS63C, T-AS64C, T-AS17C
ASTM D217	≤400 10-0654, ≤450 10-0655, 10-0661/47, 10-0660/765635, 670, 10-0671/ASTM, 10-0672, 722/PEN, T-0672
ASTM D937	10-0654, 10-0661/47, 10-0660/10065
ASTM D1321	10-0653, 10-0661/47, 10-0651/50, 10-0660/2532, 10-0660/BC, 10-0660/V, 722/PEN, T-AS64C
ASTM D1403	10-0656+10-0661/15, 10-0657+10-0661/8, 680/½, 680/¼
ASTM D2884	10-0658/MG, 10-0661/15, 10-0660/7664
ACCESSORIES ON REQUEST	
10-0652	PENETRATION NEEDLE ASTM D5 IP 49 EN 1426 2.5 g., brass / stainless steel
10-0652/C	CERTIFICATE PENETRATION NEEDLE ASTM D5 IP 49 EN 1426,
10-0652/60	PENETRATION NEEDLE For penetration >350 and up to 500
10-0653	NEEDLE PENETRATION ASTM D1321 IP 376 DIN 51579 2.5 g., stainless steel
10-0654	CONE PENETRATION "OPTIONAL" ASTM D217 D937 IP 50 IP 179 DIN 51804 ISO 2137 102.5 g, Ø65 mm., brass body, stainless steel tip.
10-0655	CONE PENETRATION "STANDARD" ASTM D217 D937 IP 50 IP 179 ISO 2137 102.5 g., Ø69 mm., aluminum body, stainless steel tip
10-0656	CONE PENETRATION ½ ASTM D1403 IP 310 22.5 g., stainless steel body and tip.
10-0657	CONE PENETRATION ¼ ASTM D1403 IP 310 1.20 g., PMMA body, stainless steel tip.
10-0658/MG	CONE PROPELLANTS ASTM D2884 15 g., Ø65 mm., magnesium
10-0658/PX	CONE 15 g., Ø65 mm., PMMA
10-0658/5	MICRO-CONE ASTM 5 g., aluminum
10-0658/10	MICRO-CONE ASTM 10 g., stainless steel
10-0659/70	PERFORATED DISK 102.5 g., Ø70 mm., aluminum
10-0659/35	PERFORATED DISK 19.5 g., Ø35 mm., aluminum
10-0659/39	PERFORATED DISK 10 g., Ø39 mm., aluminum
10-0662/BALL	BALL PENETRATION ASTM D3407 D3408 D5329 Made of stainless steel
10-0661/47	PLUNGER 47.5 g., stainless steel
10-0661/97	PLUNGER 97.5 g., stainless steel
10-0661/15	PLUNGER ½ 15 g., aluminum (per 10-0656)
10-0661/8	PLUNGER ¼ 8.18 g., magnesium (per 10-0657)
10-0661/10	PLUNGER 10 g., aluminum
10-0651/50	LOAD WEIGHT, 50 g
10-0651/100	LOAD WEIGHT, 100 g
10-0660/M	TRANSFER DISH Ø160x90 mm., metal, with internal serpentine heat exchanger and hose sockets, spacer plate with holes
10-0660/V	TRANSFER DISH Ø185x90 mm., glass, with hose sockets, spacer plate with holes
10-0660/338	SAMPLE JAR Ø33x8 mm, pack of 5 pcs For bitumen, penetration up to 40, steel
10-0660/5016	SAMPLE JAR Ø50x16 mm, pack of 5 pcs For bitumen, penetration up to 40, steel
10-0660/5535	SAMPLE JAR Ø55x35 mm, pack of 5 pcs For bitumen, penetration up to 200, steel
10-0660/5545	SAMPLE JAR Ø55x45 mm, pack of 5 pcs For bitumen, penetration from 200 to 350, steel
10-0660/7570	SAMPLE JAR Ø75x70 mm, pack of 5 pcs For bitumen, penetration from 200 to 350, steel
10-0660/7045	SAMPLE JAR Ø70x45 mm, pack of 5 pcs For bitumen, penetration from 200 to 350, steel
10-0660/5570	SAMPLE JAR Ø55x70 mm, pack of 5 pcs For bitumen, penetration from 350 to 500, steel
10-0660/7060	SAMPLE JAR Ø70x60 mm, pack of 5 pcs For bitumen, penetration from 350 to 500, steel
10-0660/10065	SAMPLE JAR Ø100x65 mm, pack of 3 pcs Steel, with cover
10-0660/765635	SAMPLE JAR Ø76.5x63.5 mm, pack of 3 pcs Steel
10-0660/7664	SAMPLE JAR Ø76x64 mm, pack of 3 pcs 2-sections
10-0660/2532	WAX TEST CYLINDER Ø25x32 mm, pack of 2 pcs
10-0660/BC	BASE PLATE 63.5x38 mm, pack of 2 pcs Brass
10-0660/AL	SAMPLE JAR Ø55x35 mm, pack of 100 pcs Aluminum
10-0660/AN20	REDUCTION RING "20" EN 1426 Ring insert for reduce sample volume, for use on sample jar, ext. Ø53 int. Ø36 20 mm high, anodized aluminum
10-0660/AN30	REDUCTION RING "30" EN 1426 Ring insert for reduce sample volume, for use on sample jar, ext. Ø53 int. Ø36 30 mm high, anodized aluminum
722/PEN	CIRCULATING BATH Water bath for maintaining samples at constant temperature. Working temperature up to 80°C with decimal resolution. Digital thermoregulator with probe PT100, stainless steel heater, coiling coil, motor pump allowing the liquid circulation with sockets to connect at transfer dish, stainless steel plate for tempering directly in the bath the sample jar. Technical specifications: - Temperature: ambient to 80°C (176°F) - Stability: ±0.1° C - Power supply: 220V ±10% 50/60 Hz - Power: 1200W. - Dimensions: 30x35x27 cm - Weight: 7 Kg - Bath capacity: 5 about liters
10-0332	DIGITAL STOPWATCH 7 digit LCD, max.10 hours, 1/100 sec, digit h=8 mm
T-AS17C	THERMOMETER ASTM 17C
T-AS63C	THERMOMETER ASTM 63C
T-AS64C	THERMOMETER ASTM 64C

PENETRATION

GREASE WORKER

Metal body, screw cover with air valve and thermometer pass, piston with ground-slideway brass handle.

670/MAN MANUAL GREASE WORKER ASTM D217 IP 50 ISO 2137 FTM 791-373

With base with lever

670/AUT AUTOMATIC GREASE WORKER ASTM D217 IP 50 ISO 2137 FTM 791-373

Automatic grease worker machine. Heavy base plate with monofase gear motor preset to make 60 strokes per minute, 6-digit counting mechanism and automatic stroke count and shut-off device. With one grease worker.

Technical specifications:

- Power supply: 230V ±10% 50Hz
- Power: 800W
- Dimensions: 41x30x50 cm
- Weight: 37 kg

670/AUT/2 AUTOMATIC GREASE WORKER 2 POSITIONS ASTM D217 IP 50 ISO 2137 FTM 791-373

With two grease workers.

Technical specifications:

- Power supply: 230V ±10% 50Hz
- Power: 800W

680/¼ ¼ SCALE GREASE WORKER ASTM D1403 IP 310 ISO 2137

8 holes Ø3.17 mm plate, stainless steel

680/½ ½ SCALE GREASE WORKER ASTM D1403 IP 310 ISO 2137

8 holes Ø6.35 mm plate, stainless steel

SPARE PARTS

- | | |
|-----------|------------------------------|
| 15-0681/¼ | PLATE ¼
8 holes Ø3.17 mm. |
| 15-0681/½ | PLATE ½
8 holes Ø6.35 mm. |



ACCESSORIES ON REQUEST

- | | |
|--------------|--|
| 10-0671/ASTM | ASTM WORKER PLATE
With 51 holes Ø6.35 mm, brass nickel-plated |
| 10-0671/FTM | FTM WORKER PLATE
With 270 holes Ø1.58 mm, brass nickel-plated |
| 10-0672 | GREASE CUTTER |
| 10-0673 | OVERFLOW RING |
| T-0672 | BI-METAL THERMOMETER
Range 0 +60°C |

SPARE PARTS

- | | |
|---------|---|
| 15-0670 | GREASE WORKER
Metal body, screw cover with air valve and thermometer pass, piston with ground-slideway brass handle. |
| 15-0672 | AUTOMATIC STROKE COUNT
6 digit |



670/MAN + T-0672

2013

670/AUT

2013

PENETRATION

ROLL STABILITY

ASTM D1831 ROLL STABILITY OF LUBRICATING GREASE

This test method covers determination of the changes in the consistency, as measured by cone penetration, of lubricating greases when worked in the roll stability test apparatus

ASTM D7342 SHEAR STABILITY OF LUBRICATING GREASE IN PRESENCE OF WATER (WATER STABILITY TEST)

This test method covers two procedures for determining the shear stability of lubricating grease in the presence of water (wet shear stability) by a full scale grease worker or a roll stability test apparatus. Both procedures can be used to determine the relative wet shear stability of greases, but the results between procedures are not directly comparable. This test method is also known as the water stability test

Thermostatic cabin for up to 4 test cylinders, temperature is controlled by a PID digital thermoregulator with overtemperature alarm and PT100A, digital timer, 160 rpm speed geared motor, base with roller supports allowing the rotation.

Technical specifications:

- Temperature: from ambient to +200°C (392°F)
- Power supply: 230V ±10% 50/60Hz
- Power: 2000W
- Dimensions: 62x62x48 cm
- Weight: 39 kg

700 ROLL STABILITY TESTER

ACCESSORIES ON REQUEST

- 10-0701 TEST CYLINDER WITH ROLLER
Made of stainless steel

CONSUMABLES x 2 YEARS

- 15-0702 GASKET FOR TEST CYLINDER, pack of 5 pcs
- 15-0703 O-RING, pack of 10 pcs

SPARE PARTS

- 15-0701/C TEST CYLINDER
Made of stainless steel
- 15-0701/R ROLLER
Made of stainless steel



FLASH POINT

PENSKY-MARTENS

ASTM D93 E502 IP 34 EN 22719 ISO 15267 ISO 2719 DIN 51758 FLASH POINT BY PENSKY-MARTENS CLOSED CUP TESTER

This test method covers the determination of the flash point of petroleum products in the temperature range from 40 to 360°C by a manual Pensky-Martens closed-cup apparatus or an automated Pensky-Martens closed-cup apparatus, and the determination of the flash point of biodiesel in the temperature range of 60 to 190°C by an automated Pensky-Martens closed cup apparatus.

Procedure A is applicable to distillate fuels (diesel, biodiesel blends, kerosene, heating oil, turbine fuels), new and in-use lubricating oils, and other homogeneous petroleum liquids not included in the scope of Procedure B or Procedure C.

Procedure B is applicable to residual fuel oils, cutback residual, used lubricating oils, mixtures of petroleum liquids with solids, petroleum liquids that tend to form a surface film under test conditions, or are petroleum liquids of such kinematic viscosity that they are not uniformly heated under the stirring and heating conditions of Procedure A.

Procedure C is applicable to biodiesel (B100). Since a flash point of residual alcohol in biodiesel is difficult to observe by manual flash point techniques, automated apparatus with electronic flash point detection have been found suitable

Electrically heated by electronic regulator, mounted on a case painted with anti-acid epoxidic products. Calibrated brass test cup, cover with gas or electric ignition device allowing to ignite the testing sample by a manual trip-opening. Motor stirrer for Procedure "A" and "B", air bath and cooling fan

Technical specifications:

- Temperature: from 40 to 360°C (104 +680°F)
- Power supply: 230V ±10% 50Hz
- Power: 700W
- Dimensions: 40x33x52 cm
- Weight: 11 kg.

750/E PENSKY-MARTENS

With gas ignition

750/E/IE PENSKY-MARTENS

With electric ignition

ACCESSORIES ON REQUEST

10-0748	GAS CYLINDER 2 kg. (for 750/E) Empty
10-0749	GAS REDUCER 30 mbar (for 750/E)
10-0747	GAS TUBE, L=5 m (for 750/E)
10-0751	STAINLESS STEEL TEST CUP
T-AS9C	THERMOMETER ASTM 9C IP 15C
T-AS10C	THERMOMETER ASTM 10C IP 16C
T-AS88C	THERMOMETER ASTM 88C IP 101C

CONSUMABLES x 2 YEARS

15-CAN/IE	ELECTRIC IGNITION x4
-----------	----------------------

SPARE PARTS

15-0750/S	TUBE, L=3 m
15-0751	BRASS TEST CUP
15-0752	COVER WITH MOVEMENT
15-0753/CT	THERMOMETER COLLAR
15-0753/FM	STIRRER FLEXIBLE DRIVE
15-0754/I	3-WAY SWITCH
15-0755	GAS IGNITION
17-0003	TRASFORMER (for 750/E)
17-0010	TRASFORMER (for 750/E/IE)
15-0756	COOLING FAN
11-0750	HEATER
15-0004	BIPOLAR GREEN SWITCH
15-0005	BIPOLAR YELLOW SWITCH
15-0110	ELECTRONIC REGULATOR
12-0750/MOT	GEARED MOTOR



750/E

2014

FLASH POINT

Electrically heated by electronic regulator, mounted on a case painted with anti-acid epoxidic products. Calibrated brass test cup, cover with gas or electric ignition device allowing to ignite the testing sample by a manual trip-opening. Motor stirrer for Procedure "A" and "B", digital thermometer with glass PT100A probe, air bath and cooling fan

Technical specifications:

- Temperature: from 40 to 360°C (104 +680°F)
- Power supply: 230V ±10% 50Hz
- Power: 700W
- Dimensions: 40x33x52 cm
- Weight: 11 kg.

750/BIS **DIGITAL PENSKY-MARTENS**

With gas ignition

750/BIS/IE **DIGITAL PENSKY-MARTENS**

With electrical ignition

ACCESSORIES ON REQUEST

10-0748	GAS CYLINDER 2 kg (for 750/BIS) Empty
10-0749	GAS REDUCER 30 mbar (for 750/BIS)
10-0747	GAS TUBE, L=5 m (for 750/BIS)
10-0751	STAINLESS STEEL TEST CUP

CONSUMABLES x 2 YEARS

15-CAN/IE	ELECTRIC IGNITOR x4
-----------	---------------------

SPARE PARTS

15-0750/S	TUBE L=3 m
15-0751	BRASS TEST CUP
15-0752	COVER WITH MOVEMENT
15-0753/CS	PROBE COLLAR
15-0753/FM	STIRRER FLEXIBLE DRIVE
15-0754/I	3-WAY SWITCH
15-0755	GAS IGNITION
17-0003	TRASFORMER (for 750/BIS)
17-0010	TRASFORMER (for 750/BIS/IE)
15-0756	FAN
11-0750	HEATER
15-0004	BIPOLAR GREEN SWITCH
15-0005	BIPOLAR YELLOW SWITCH
15-0110	ELECTRONIC REGULATOR
16-0005	DIGITAL THERMOMETER
14-0007	GLASS PT100A PROBE
12-0750/BIS/MOT	GEARED MOTOR



FLASH POINT

Analyzer capable to perform ASTM D93 test standard including all test procedures, custom test feature that permits the user to perform its own test with its own test parameters such as start temperature, end temperature, rise rate stirring speed etc. The analyzer has also many safety features such as fire hazard detection with test shutdown and warning, ignition system control and many more.

The analyzer has included test profiling with the capability to add, edit, use and delete any test profile, included also the "unknown flash" mode with user defined test temperature range.

Various sample types support including CRM with single or multiple test feature capable to perform special test with repeatability and tolerance.

The analyzer is equipped with a high precision made in glass temperature sensor, fire hazard and ignition sensor, USB 2.0 and ethernet socket with remote control feature, 7" touch screen LCD, high performance CPU.

Over 500.000 guarantee test results memory, long life electric igniter.

Technical specifications::

- Temperature: from 40 to 360°C (104 to 680°F)
- Power supply: 230V ±10% 50Hz
- Power: 800W
- Dimensions: 33x46x57 cm
- Weight: 26 kg

750/SEM PENSKY-MARTENS SEMI-AUTOMATIC

Without automatic flash point sensor and atmospheric pressure sensor

750/AUT PENSKY-MARTENS AUTOMATIC

With high response and accuracy flash detector and atmospheric pressure sensor with ±0.1 Kpa precision.

ACCESSORIES ON REQUEST

10-0748	GAS CYLINDER 2 kg Empty
10-0749	GAS REDUCER 30 mbar
10-0747	GAS TUBE, L=5 m
10-0751	STAINLESS STEEL TEST CUP
14-0007/C	GLASS PT100 PROBE CERTIFIED

CONSUMABLES x 2 YEARS

15-CAN/AUT	ELECTRIC IGNITOR x4
------------	---------------------

SPARE PARTS

15-0750/S	TUBE, L=3 m
15-0751	BRASS TEST CUP
15-0752/AUT	COVER WITH MOVEMENT
15-0753/CS	PROBE COLLAR
15-0753/FA	STIRRER FLEXIBLE DRIVE
15-0755	GAS IGNITION
17-0750	TRANSFORMER
15-0756	FAN
11-0750	HEATER
15-0004	BIPOLAR GREEN SWITCH
14-0750/AUT/ION	THERMOCOUPLE (for 750/AUT)
14-0007	GLASS PT100A PROBE
12-0750/BIS/MOT	GEARED MOTOR



750/AUT

2013

FLASH POINT

SMALL SCALE FLASH POINT

ASTM D3278 IP 534 FLASH POINT OF LIQUIDS BY SMALL SCALE CLOSED-CUP APPARATUS

These test methods cover procedures for determining whether a material does or does not flash at a specified temperature or for determining the lowest finite temperature at which a material does flash when using a small scale closedcup apparatus. The test methods are applicable to paints, enamels, lacquers, varnishes, and related products having a flash point between 0 and 110°C (32 and 230°F) and viscosity lower than 150 cSt at 25°C (77°F).

ASTM D3828 FLASH POINT BY SMALL SCALE CLOSED CUP TESTER

These test methods cover procedures for flash point tests, within the range of -30 to 300°C, of petroleum products and biodiesel liquid fuels, using a small scale closed cup tester. The procedures may be used to determine, whether a product will or will not flash at a specified temperature (flash/no flash Method A) or the flash point of a sample (Method B). When used in conjunction with an electronic thermal flash detector, these test methods are also suitable for flash point tests on biodiesels such as fatty acid methyl esters (FAME).

ASTM D7236 FLASH POINT BY SMALL SCALE CLOSED CUP TESTER (RAMP METHOD)

This test method covers the determination of the flash point of aviation turbine fuel, diesel fuel, kerosine and related products in the temperature range of 40 to 135°C by a small scale closed cup apparatus.

ASTM E502 SELECTION AND USE OF ASTM STANDARDS FOR THE DETERMINATION OF FLASH POINT OF CHEMICALS BY CLOSED CUP METHODS

IP 303 (obs)

IP 523 ISO 3679 DETERMINATION OF FLASH POINT - RAPID EQUILIBRIUM CLOSED CUP METHOD

This International Standard specifies a method for the determination of the closed cup flash point of paints (including water-borne paints), varnishes, paint binders, adhesives, solvents, petroleum, and related products having closed cup flash points within the range of -30 °C to 300 °C

IP 524 ISO 3680 DETERMINATION OF FLASH/NO FLASH - RAPID EQUILIBRIUM CLOSED CUP METHOD

This International Standard specifies a method for the determination of the ability of paints (including waterborne paints), varnishes, paint binders, adhesives, solvents and petroleum and related products, when maintained at a selected test temperature within the range of -30 °C to 300 °C, and under the conditions of test, to yield sufficient flammable vapour at this temperature to cause ignition on the application of a test flame in a standard manner.

Electrically heated by electronic regulator, mounted on a case painted with anti-acid epoxidic products. Aluminum block for 2 and 4 ml samples, cover with manual opening system, gas ignition with pilot flame, digital thermometer with PT100 probe. Thermal insulating with cooling coil for circulation of cooling fluid with optional cryostat

Technical specifications:

- Temperature: -10 to 300°C (572°F)
- Power supply: 220V 50Hz
- Power: 700W
- Dimensions: 29x33x30 cm
- Weight: 10 Kg

ACCESSORIES ON REQUEST

10-0748	GAS CYLINDER 2 kg Empty
10-0749	GAS REDUCER 30 mbar
10-0747	GAS TUBE, L=5 m

780 SMALL-SCALE FLASH POINT APPARATUS



780

2015

FLASH POINT

ABEL

IP 170 ISO 13736 DETERMINATION OF FLASH POINT - ABEL CLOSED CUP METHOD

For determination of the closed-cup flash point of combustible liquids having flash point between -30 and 70°C (-22 and 158°F)

Electrically heated by electronic regulator, mounted on a case painted with anti-acid epoxidic products. Calibrated brass crucible, cover with gas or electrical ignition device allowing to ignite the testing sample by a manual glide-opening. Motor stirrer, air bath and water bath are made in chromium-plated copper, internal cooling coil with external connection for possible cooling bath

Technical specifications:

- Temperature: from ambient to 70°C (158°F) (up to -30°C (-22°F) with external unit)
- Power supply: 230V ±10% 50Hz
- Power: 300W
- Dimensions: 26x32x37 cm
- Weight: 7 kg

820 ABEL

With gas ignition

820/IE ABEL

With electrical ignition

ACCESSORIES ON REQUEST

10-0748	GAS CYLINDER 2 kg Empty
10-0749	GAS REDUCER 30 mbar
10-0747	GAS TUBE, L=5 m
10-0821	STAINLESS STEEL TEST CUP
T-IP74C	THERMOMETER IP 74C
T-IP75C	THERMOMETER IP 75C

CONSUMABLES x 2 YEARS

15-CAN/IE	ELECTRIC IGNITOR x2
-----------	---------------------

SPARE PARTS

15-0750/S	TUBE, L=3 M.
15-0821	BRASS TEST CUP
15-0822	COVER WITH MOVEMENT
15-0828/CT	THERMOMETER COLLAR
15-0824/FM	STIRRER FLEXIBLE DRIVE
11-0820	HEATER
15-0755	GAS IGNITION
17-0003	TRASFORMER (for 820)
17-0010	TRASFORMER (for 820/IE)
15-0004	BIPOLAR GREEN SWITCH
15-0005	BIPOLAR YELLOW SWITCH
15-0113	ELECTRONIC REGULATOR
12-0013	MOTOR STIRRER 30 RPM 24V



FLASH POINT

Mounted on a case painted with anti-acid epoxidic products. Automatic temperature rise and fall, temperature control system with PID algorithm and SSR drive, both electric and gas ignition support automatically controlled, automatic opening system, peltier heat and cool system cooled with tap water circulation, Aluminum block with brass test cup and cover block, temperature reading and control by glass PT100 class A sensor, detection system by ionization with mV electrostatic charge/discharge system, RTOS with S.D.M. system software operator panel with 32bit CPU, Ethernet with remote control support using integrated VNC server and backup/network printer server, USB with memory device support, keyboard, mouse, external device, Bar code reader, printer with PCL support, additional 8Gb SD card with 500.000 test results guaranteed, long life electric igniter for about 10000 cycles, internal atmospheric absolute pressure sensor with 0.1kPa precision, automated calculated results, 10 usable test presets, predefined standards, custom standard with custom parameters, internal RTC, dual scale operation: Celsius/Fahrenheit, 3 selectable languages: English, French, Italian, operating range -30 to +75°C (-22 +167°F), Power consumption: 700W with 20A.

The automatic version, 820/AUT model, is supplied with a automatic sensor for flash point and atmospheric pressure sensor with ±0.1 Kpa precision

Technical specifications:

- Temperature: from -30°C (-22°F) to 70°C (158°F)
- Power supply: 230V ±10% 50Hz
- Power: 700W
- Dimensions: 33X46X57 cm
- Weight: 28 kg

820/SEM ABEL SEMI-AUTOMATIC

Without automatic flash point sensor and atmospheric pressure sensor

820/AUT ABEL AUTOMATIC

With automatic flash point sensor and atmospheric pressure sensor

Automatic apparatus with automatic temperature rise and fall, automatic detection and temperature control system with PID algorithm and SSR drive, both electric and gas ignition support automatically controlled, automatic opening system, peltier heat and cool system cooled with tap water circulation, Aluminum block with brass test cup and cover block, temperature reading and control by glass PT100 class A sensor, detection system by ionization with mV electrostatic charge/discharge system, RTOS with S.D.M. system software operator panel with 32bit CPU, Ethernet with remote control support using integrated VNC server and backup/network printer server, USB with memory device support, keyboard, mouse, external device, Bar code reader, printer with PCL support, additional 8Gb SD card with 500.000 test results guaranteed, long life electric igniter, internal atmospheric absolute pressure sensor with 0.1kPa precision, automated calculated results, 10 usable test presets, predefined standards, custom standard with custom parameters, internal RTC, dual scale operation: Celsius/Fahrenheit, 3 selectable languages: English, French, Italian, operating range -30 to +75°C (-22 +167°F), Power consumption: 700W with 20A.

ACCESSORIES ON REQUEST

10-0748	GAS CYLINDER 2 kg Empty
10-0749	GAS REDUCER 30 mbar
10-0747	GAS TUBE, L=5 m
10-0821	STAINLESS STEEL TEST CUP
14-0007/C	GLASS PT100 PROBE CERTIFIED

CONSUMABLES x 2 YEARS

15-CAN/AUT	ELECTRIC IGNITOR x2
------------	---------------------

SPARE PARTS

15-0750/S	TUBE L=3 m
15-0821	BRASS TES CUP
15-0822/AUT	COVER WITH MOVEMENT
15-0828/CS	PROBE COLLAR (only for 820/SEM)
15-0824/FA	STIRRER FLEXIBLE DRIVE
11-0820	HEATER
15-0755	GAS IGNITION
15-0750/AUT/ION	THERMOCOUPLE (for 820/AUT)
15-0004	BIPOLAR GREEN SWITCH
14-0007	GLASS PT100 PROBE
12-0013	MOTOR STIRRER 30 RPM 24V

FLASH AND FIRE POINT

CLEVELAND - COC

ASTM D92 IP 36 EN 22592 (obs.) ISO 2592 DIN 51376 (obs) FLASH AND FIRE POINTS BY CLEVELAND OPEN CUP TESTER

This test method describes the determination of the flash point and fire point of petroleum products by a manual Cleveland open cup apparatus or an automated Cleveland open cup apparatus.

This test method is applicable to all petroleum products with flash points above 79°C (175°F) and below 400°C (752°F) except fuel oils.

Electrically heated by electronic regulator, mounted on a case painted with anti-acid epoxidic products. Calibrated brass cup, gas ignition device fitted with a pivot manually or automatic passing on the cup. Fitted with pincers for thermometer.

Technical specifications:

- Temperature: from 79 to 400°C (from 175 to 752°F)
- Power supply: 230V ±10% 50Hz
- Power: 700W
- Dimensions: 29x33x30 cm
- Weight: 8 kg

880 CLEVELAND

With manually passing on the cup

890 CLEVELAND

With automatic passing on the cup by internal timer

ACCESSORIES ON REQUEST

10-0748	GAS CYLINDER 2 kg Empty
10-0749	GAS REDUCER 30 mbar
10-0747	GAS TUBE, L=5 m
T-AS11C	THERMOMETER ASTM 11C IP 28C

SPARE PARTS

15-0750/S	TUBE, L=3 m
15-0881	BRASS TEST CUP
15-0882	CENTERING RING FOR TEST CUP
15-0883	TEST FLAME APPLICATOR
15-0889	CLAMP FOR THERMOMETER
11-0022	HEATER
15-0004	BIPOLAR GREEN SWITCH
15-0005	BIPOLAR YELLOW SWITCH
15-0110	ELECTRONIC REGULATOR
15-0020	TIMER



890

2011

FLASH AND FIRE POINT

Mounted on a case painted with anti-acid epoxidic products. Calibrated brass cup, gas ignition device fitted with a pivot automatic passing on the cup. two electrical ignitor for automatic turn on of pivot.

Apparatus with automatic temperature ramp, flash sensor, glass PT100, electrical and gas ignition system, ramp precision of 0.1°C, Real time operating system with S.D.M. software application, network connection and remote control of the instrument, 2xUSB host+client ports, serial RS232 port, USB, ethernet and serial printer with PCL support, Custom method, ramp and setpoint test procedure, TFT touch screen display with 800x480 screen resolution. Dual scale with °C and °F of choice, Tested with certified product. Friendly and easy to use application. Safe use and diagnostics of the components and sensors.

Over 500.000 guarantee test results memory, long life electric igniter.

The automatic version, 880/AUT model, is supplied with a automatic sensor for flash point and atmospheric pressure sensor with ±0.1 Kpa precision

Technical specifications:

- Temperature: from 79 to 400°C (from 175 to 752°F)
- Power supply: 230V ±10% 50Hz
- Power: 700W
- Dimensions: 46x31x57 cm
- Weight: 20 kg

880/SEM CLEVELAND SEMI-AUTOMATIC

Without automatic flash point sensor and atmospheric pressure sensor

880/AUT CLEVELAND AUTOMATIC

With automatic flash point sensor and atmospheric pressure sensor

ACCESSORIES ON REQUEST

10-0748	GAS CYLINDER 2 kg Empty
10-0749	GAS REDUCER 30 mbar
10-0747	GAS TUBE, L=5 m
14-0007/C	GLASS PT100 PROBE CERTIFIED

CONSUMABLES x 2 YEARS

15-CAN/CL	ELECTRIC IGNITOR x4
-----------	---------------------

SPARE PARTS

15-0750/S	TUBE, L=3 m
15-0881	BRASS TEST CUP
15-0882	CENTERING RING FOR TEST CUP
15-0883	TEST FLAME APPLICATOR
11-0022	HEATER
14-0880/AUT/FIRE	SAFETY PIVOT THERMOCOUPLE (For 880/AUT)
14-0880/AUT/TEMP	TEMPERATURE THERMOCOUPLE (For 880/AUT)
17-0010	TRANSFORMER
15-0004	BIPOLAR GREEN SWITCH
14-0007	GLASS PT100 PROBE
14-0880	THERMOCOUPLE (For 880/AUT)



880/SEM

2013

FLASH POINT

TAG CLOSED CUP

ASTM D56 IP 491 IP 492 ISO 1516 ISO 1523 FLASH POINT BY TAG CLOSED CUP TESTER

This test method covers the determination of the flash point, by tag manual and automated closed testers, of liquids with a viscosity below 5.5 mm²/s (cSt) at 40°C (104°F), or below 9.5 mm²/s (cSt) at 25°C (77°F), and a flash point below 93°C (200°F)

ASTM D3934 FLASH/NO FLASH TEST-EQUILIBRIUM METHOD BY A CLOSED-CUP APPARATUS

This test method covers the determination of whether a liquid complies with the closed-cup flash point requirements in government regulations, or in specifications, or as agreed between the purchaser and the seller.

This test method is limited to a temperature range between 0 and 110°C (32 and 230°F)

ASTM D3941 FLASH POINT BY THE EQUILIBRIUM METHOD WITH A CLOSED-CUP APPARATUS

This test method covers the determination of the flash point of liquids in which the specimen and the air/vapor mixture above it are approximately in temperature equilibrium.

This test method is limited to a temperature range from 0 to 110°C (32 to 230°F)

ASTM E502

Electrically heated by electronic regulator, mounted on a case painted with anti-acid epoxidic products. Test copper cup equipped with glide device and gas or electrical ignition. Waterbath and support-jacket made in brass. With internal cooling coil.

Technical specifications:

- Temperature: from ambient to 110°C (230°F) (up to -30°C (-22°F) with external unit)
- Power supply: 230V ±10% 50Hz
- Power: 700W
- Dimensions: 18x20x20 cm
- Weight: 6 kg

930 TAG CLOSED

With gas ignition

930/IE TAG CLOSED

With electrical ignition

ACCESSORIES ON REQUEST

10-0748	GAS CYLINDER 2 kg Empty
10-0749	GAS REDUCER 30 mbar
10-0747	GAS TUBE, L=5 m
T-AS57C	THERMOMETER ASTM 57C
T-AS9C	THERMOMETER ASTM 9C IP 15C

CONSUMABLES x 2 YEARS

15-CAN/IE	ELECTRIC IGNITOR x2
-----------	---------------------

SPARE PARTS

15-0750/S	TUBE, L=3 m
15-0932	COPPER TEST CUP, pack of 2 pcs
15-0933	COVER WITH MOVEMENT
15-0753/CT	COLLAR FOR THERMOMETER
11-0022	HEATER
15-0934	GAS IGNITION
17-0750	TRASFORMER (for 930/IE)
15-0004	BIPOLAR GREEN SWITCH
15-0110	ELECTRONIC REGULATOR



930

2012

FLASH POINT

Mounted on a case painted with anti-acid epoxidic products. Test copper cup equipped with glide device with gas and electrical ignition. Heat and cool: Double action contrast PID algorithm; cooling system made by 2Xpeltier cells, up to -15°C ; heating by contrast (reverse cooling).

Apparatus with automatic temperature ramp, sensor flash point, atmospheric pressure sensor with ± 0.1 Kpa precision, glass PT100, electrical and gas ignition system, ramp precision of 0.3°C ,

Real time operating system with S.D.M. software application, network connection and remote control of the instrument, 1xUSB, ethernet and PCL support, Ramp and setpoint test procedure, TFT touch screen display with 800x480 screen resolution. Dual scale with $^{\circ}\text{C}$ and $^{\circ}\text{F}$ of choice, Tested with certified product. Friendly and easy to use application. Safe use and diagnostics of the components and sensors.

Over 500.000 guarantee test results memory, long life electric igniter for about 10000 cycles.

Technical specifications:

- Temperature: -15°C up to 110°C ($5 + 230^{\circ}\text{F}$)

- Power supply: $230\text{V} \pm 10\%$ 50Hz

- Power: 800W

930/SEM TAG CLOSED SEMI-AUTOMATIC

Without automatic flash point sensor and atmospheric pressure sensor

930/AUT TAG CLOSED AUTOMATIC

With automatic flash point sensor and atmospheric pressure sensor

ACCESSORIES ON REQUEST


10-0748	GAS CYLINDER 2 kg Empty
10-0749	GAS REDUCER 30 mbar
10-0747	GAS TUBE, L=5 m
14-0007/C	GLASS PT100 PROBE CERTIFIED

CONSUMABLES x 2 YEARS

15-CAN/AUT	ELECTRIC IGNITOR x2
------------	---------------------

SPARE PARTS

15-0750/S	TUBE, L=3 m
15-0932	COPPER TEST CUP, pack of 2 pcs
15-0933/AUT	COVER WITH MOVEMENT
11-0022	HEATER
15-0934	GAS IGNITION
15-0750/AUT/ION	THERMOCOUPLE (for 930/AUT)
17-0010	TRANSFORMER
15-0004	BIPOLAR GREEN SWITCH
14-0007	GLASS PT100 PROBE

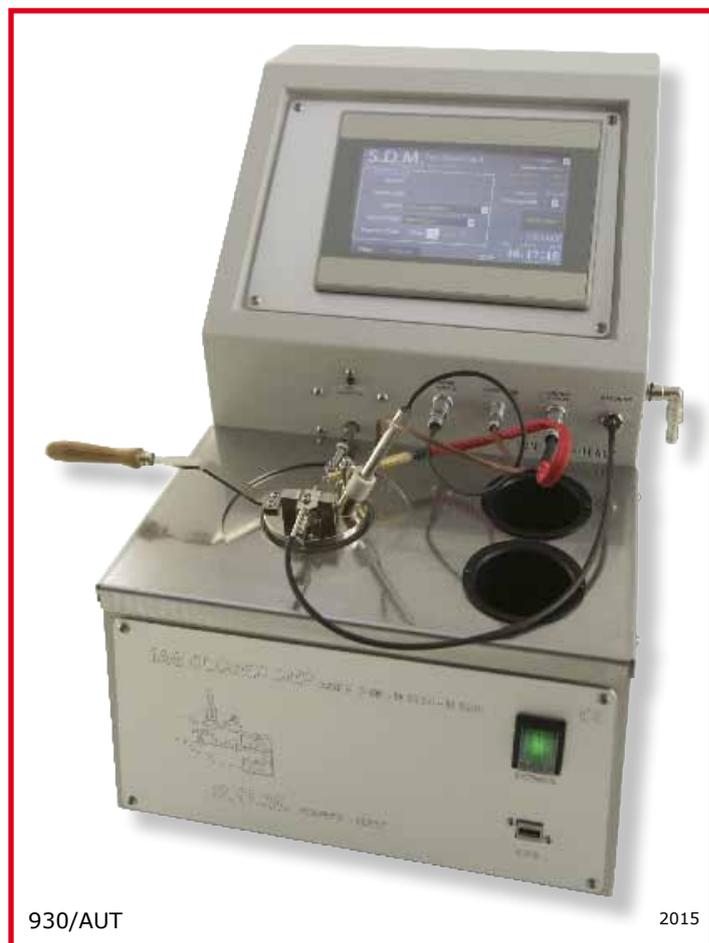

930/AUT

2015

FLASH POINT

TAG OPEN CUP

ASTM D1310 FLASH POINT AND FIRE POINT OF LIQUIDS BY TAG OPEN-CUP APPARATUS

This test method covers the determination by Tag Open-Cup Apparatus of the flash point and fire point of liquids having flash points between 18 and 165°C (0 and 325°F) and fire points up to 325°F.

ASTM D3143 FLASH POINT OF CUTBACK ASPHALT

This test method covers the determination of flash points by the Tag Open-Cup Apparatus of cutback asphalts having flash points of less than 93°C (200°F)

Electrically heated by electronic regulator, mounted on a case painted with anti-acid epoxidic products. Test cup made in moulded glass, gas ignition device with pivot passing manually over the cup. This item has a water bath fitted with pincers for thermometer

Technical specifications:

- Temperature: from ambient 180°C (356°F)
- Power supply: 230V ±10% 50Hz
- Power: 700W
- Dimensions: 26x20x33 cm
- Weight: 8 kg

950 TAG OPEN

ACCESSORIES ON REQUEST

10-0748	GAS CYLINDER 2 kg Empty
10-0749	GAS REDUCER 30 mbar
10-0747	GAS TUBE, L=5 m
T-AS9C	THERMOMETER ASTM 9C IP 15C
T-AS33C	THERMOMETER ASTM 33C IP 20C
T-AS34C	THERMOMETER ASTM 34C IP 21C
T-AS35C	THERMOMETER ASTM 35C IP 59C

CONSUMABLES x 2 YEARS

15-0951	GLASS CUP, pack of 2 pcs x1
---------	-----------------------------

SPARE PARTS

15-0750/S	TUBE, L=3 m
15-0952	TEST FLAME APPLICATOR, pack of 2 pcs
11-0022	HEATER
15-0004	BIPOLAR GREEN SWITCH
15-0110	ELECTRONIC REGULATOR
15-0953	WATER BATH



DISTILLATION

DISTILLATION UNIT

ASTM D86 DISTILLATION OF PETROLEUM PRODUCTS AT ATMOSPHERIC PRESSURE

This test method covers the atmospheric distillation of petroleum products using a laboratory batch distillation unit to determine quantitatively the boiling range characteristics of such products as light and middle distillates, automotive spark-ignition engine fuels with or without oxygenates (see Note 1), aviation gasolines, aviation turbine fuels, diesel fuels, biodiesel blends up to 20%, marine fuels, special petroleum spirits, naphthas, white spirits, kerosines, and Grades 1 and 2 burner fuels.

ASTM D216 (obs) METHOD OF TEST FOR DISTILLATION OF NATURAL GASOLINE

ASTM D447 (obs) TEST METHOD FOR DISTILLATION OF PLANT SPRAY OILS

ASTM D850 DISTILLATION OF INDUSTRIAL AROMATIC HYDROCARBONS AND RELATED MATERIALS

This test method covers the distillation of industrial aromatic hydrocarbons and related materials of relatively narrow boiling ranges from 30 to 250°C (86 to 482°F)

ASTM D1078 IP 195 ISO 4626 DISTILLATION RANGE OF VOLATILE ORGANIC LIQUIDS

This test method covers the determination of the distillation range of liquids boiling between 30 and 350°C (86 to 662°F), that are chemically stable during the distillation process, by manual or automatic distillation procedures.

This test method is applicable to organic liquids such as hydrocarbons, oxygenated compounds, chemical intermediates, and blends thereof.

ASTM E133, IP 123, ISO 3405, DIN 51751 DISTILLATION STANDARD SPECIFICATION

Consisting of: an electric heating for temperature up 400°C (752°F) (distillation group 0-4), mounting on left side, made of stainless steel with inspection tempered window can be opened, electronic regulator, adjustable flask support with external control knob.

Stainless steel cooling bath with nickel-plated condenser tube inclined to the right, glossy-black PVC cover, connections allowing water circulation, drain valve.

Technical specifications:

- Temperature: from ambient to 400°C (752°F)
- Power supply: 230V ±10% 50Hz
- Power: 1000W
- Dimensions: 39x65x60 cm
- Weight: 9 kg

990 DISTILLATION UNIT

Consisting of: two electric heating for temperature up to 400°C (752°F) (distillation group 0-4), made of stainless steel with inspection tempered window can be opened, electronic regulator, adjustable flask support with external control knob.

Stainless steel cooling bath with nickel-plated condenser tube, glossy-black PVC cover, connections allowing water circulation, drain valve.

Technical specifications:

- Temperature: from ambient to 400°C (752°F)
- Power supply: 230V ±10% 50Hz
- Power: 2000W
- Dimensions: 80x65x60 cm
- Weight: 20 kg

1000 DISTILLATION UNIT (2 POSITIONS)

Consisting of: an electric heating for temperature up 400°C (752°F) (distillation group 0-4), mounting on left side, made of stainless steel with inspection tempered window can be opened, electronic regulator, adjustable flask support with external control knob.

Refrigerated and heated stainless steel cooling bath with temperature range 0-60°C (32-140°F), with nickel-plated, condenser tube inclined to the right, glossy-black PVC cover, drain valve.

990/R REFRIGERATED DISTILLATION UNIT



Consisting of: two electric heating for temperature up to 400°C (752°F) (distillation group 0-4), made of stainless steel with inspection tempered window can be opened, electronic regulator, adjustable flask support with external control knob. Refrigerated and heated stainless steel cooling bath with temperature range 0-60°C (32-140°F), with nickel-plated, condenser tube inclined to the right, glossy-black PVC cover, drain valve.

1000/R REFRIGERATED DISTILLATION UNIT (2 POSITIONS)

DISTILLATION

ACCESSORIES ON REQUEST

For ASTM D86

10-1175/100	CENTERING DEVICE THERMOMETER AND STOPPER CONDENSER PTFE centering device for thermometer and PTFE stopper link to condenser bath. For flask 100 and 125 ml
10-1176	FLASK TYPE A 100 ml, pack of 3 pcs
10-1177	FLASK TYPE B 125 ml, pack of 3 pcs
10-1187/P	PRECISION CYLINDER TYPE B 100 ml Graduated 1-100:0.1 ml
10-1192	GLASS CERAMIC FLASK SUPPORT BOARD Ø32 mm
10-1193	GLASS CERAMIC FLASK SUPPORT BOARD Ø38 mm
10-1194	GLASS CERAMIC FLASK SUPPORT BOARD Ø50 mm
T-AS7C	THERMOMETER ASTM 7C IP 5C
T-AS8C	THERMOMETER ASTM 8C IP 6C

For ASTM D850

10-1175/200	CENTERING DEVICE THERMOMETER AND STOPPER CONDENSER PTFE centering device for thermometer and PTFE stopper link to condenser bath. For flask 200 ml
10-1179	FLASK TYPE C 200 ml, pack of 3 pcs
10-1187/P	PRECISION CLINDER TYPE B 100 ml Graduated 1-100:0.1 ml
10-1191	GLASS CERAMIC FLASK SUPPORT BOARD Ø25 mm
10-1193	GLASS CERAMIC FLASK SUPPORT BOARD Ø38 mm
10-1194	GLASS CERAMIC FLASK SUPPORT BOARD Ø50 mm
T-AS39C	THERMOMETER ASTM 39C IP 79C
T-AS40C	THERMOMETER ASTM 8C IP 80C
T-AS41C	THERMOMETER ASTM 41C IP 81C
T-AS42C	THERMOMETER ASTM 42C IP 82C

For ASTM D1078

10-1175/200	CENTERING DEVICE THERMOMETER AND STOPPER CONDENSER PTFE centering device for thermometer and PTFE stopper link to condenser bath. For flask 200 ml
10-1179	FLASK TYPE C 200 ML, pack of 3 pcs
10-1187/P	PRECISION CLINDER TYPE B 100 ML Graduated 1-100:0.1 ml
10-1192	GLASS CERAMIC FLASK SUPPORT BOARD Ø32 mm
10-1193	GLASS CERAMIC FLASK SUPPORT BOARD Ø38 mm
T-AS2C	THERMOMETER ASTM 2C IP 62C
T-AS3C	THERMOMETER ASTM 3C IP 73C
T-AS14C	THERMOMETER ASTM 14C
T-AS37C	THERMOMETER ASTM 37C IP 77C
T-AS38C	THERMOMETER ASTM 38C IP 78C
T-AS39C	THERMOMETER ASTM 39C IP 79C
T-AS40C	THERMOMETER ASTM 8C IP 80C
T-AS41C	THERMOMETER ASTM 41C IP 81C
T-AS42C	THERMOMETER ASTM 42C IP 82C
T-AS102C	THERMOMETER ASTM 102C IP 83C
T-AS103C	THERMOMETER ASTM 103C IP 84C
T-AS104C	THERMOMETER ASTM 104C IP 85C
T-AS105C	THERMOMETER ASTM 105C IP 86C
T-AS106C	THERMOMETER ASTM 106C IP 87C
T-AS107C	THERMOMETER ASTM 107C IP 88C

SPARE PARTS

11-0990	HEATER ELEMENT
15-0111	ELECTRONIC REGULATOR
15-0990/VET	TEMPERED GLASS
15-0991	STATIC RELAY
17-0990	TRANSFORMER

DISTILLATION

PARAFFIN WAX CONTENT - METOD BY DISTILLATION

IP 459-1 EN 12606-1 DETERMINATION OF PARAFFIN WAX CONTENT BY DISTILLATION

Procedure for determining the paraffin wax content of bitumen and bituminous binder.

Consisting of a distillation unit with a 100 ml distillation flask with cork stopper, 100 ml Erlenmeyer flask with a bored cork stopper, glass vessel, gas burner, support stand and adjustable table; liquid cooling bath with sockets for external cooling unit or adding directly in the bath with solid carbon dioxide, cover for accomodate: 3 test tubes Ø38x160 mm 29/32 with wash bottle, 3 test tubes Ø38x160 mm with a spout and bored cork stopper, two openings one for insertion for solid carbon dioxide and one for insertion of thermometer; filtration unit with a 500 ml suction flask, 500 ml glass wash bottle, funnel Ø70x200 mm and vacuum manometer with valve

1040 DISTILLATION UNIT FOR DETERMINATION OF PARAFFIN WAX CONTENT

ACCESSORIES ON REQUEST

10-1041	ROUND FILTER, pack of 100 pcs Ø110 mm
10-0332	DIGITAL STOPWATCH 7 digit LCD, max.10 hours, 1/100 sec, digit h=8 mm
2460/1040	VACUUM PUMP
2470/BC160	ELECTRONIC BALANCE Range 160 g., readout 0.001, pan Ø110
T-1040/B	BATH THERMOMETER Scale -30 +50°C, div.0.5°, L=360 mm, imm. total
T-1040/S	SAMPLE THERMOMETER Scale -38 +50°C, div.1°, L=360 mm, imm.180 mm
T-1040/C	CONGEALING POINT THERMOMETER Scale 0 +100°C, div.0.5°, L=300 mm, total imm.

CONSUMABLES x 2 YEARS

10-1041	ROUND FILTER, pack of 100 pcs
---------	-------------------------------

SPARE PARTS

15-1156/V	FILTRATION FLASK, 500 ml
15-1041	DISTILLATION FLASK, 100 ml
15-1042	ERLENMEYER FLASK, 100 ml
15-1043	EVAPORATION BASIN
15-1044	TEST TUBE, pack of 3 pcs
15-1045	TEST TUBE WITH WASH BOTTLE, pack of 3 pcs
15-1046	FUNNEL
15-1047	STOPPERS SERIES
15-1048	CONNECTION TUBES SERIES
15-1049	GLASS WASH BOTTLE, 500 ml

1040

2014



DISTILLATION

CUTBACK ASPHALTIC

ASTM D402 IP 27 DISTILLATION OF CUTBACK ASPHALTIC (BITUMINOUS) PRODUCTS

Consisting of: 500 ml side arm distillation flask, Ø117 mm chimney with insulated metal shield, insulated cover split in two halves, Ø100 mm lamp screen, two sheets of 16 mesh gauze, 100 ml cylinder lamp, empty tube glass cooler, nozzle extensor made in glass. Supported on a height adjustable platform. Gas or electrical heated suitable model.

1050/G GAS DISTILLATION OF CUT-BACK ASPHALTIC APPARATUS

Technical specifications:
 - Temperature: up to 360°C (680°F)
 - Weight: 6 kg

1050/E ELECTRIC DISTILLATION OF CUT-BACK ASPHALTIC APPARATUS

Technical specifications:
 - Temperature: up to 360°C (680°F)
 - Power supply: 230V ±10% 50/60Hz
 - Power: 700W
 - Weight: 8 kg

ACCESSORIES ON REQUEST

T-AS8C THERMOMETER ASTM 8C IP 6C

CONSUMABLES x 2 YEARS

15-1059 SHEETS OF 16 mesh, pack of 6 pcs

SPARE PARTS

15-1187 GRADUATED CYLINDER 100 ml, pack of 2 pcs
 15-1050 FLASK 500 ml, pack of 2 pcs
 15-1051 SHIELD
 15-1051/C COVER TWO PARTS
 15-1052 CLAMP
 15-1054 RING
 15-1055 WATER JACKET CONDENSER
 15-1056 ADAPTER
 15-1057 INTERNAL TUBE
 15-0823 MEKER LAMP (for 1050/G)
 15-0110 ELECTRONIC REGULATOR (for 1050/E)
 11-0022 HEATER (for 1050/E)
 15-0004 BIPOLAR GREEN SWITCH



GASOLINE DILUENT

ASTM D322 IP 23 GASOLINE DILUENT IN USED GASOLINE ENGINE OILS BY DISTILLATION

This test method covers determination of the amount of dilution in crankcase oils of engines when gasoline has been used as the fuel.

Consisting of a mantle heater with steel rod and clamp, 1000 ml flask, 400 mm condenser Liebig and graduated 5 ml trap graduated tube 0-5.0:0.1, tapered joints 29/32

1120 GASOLINE DILUENT DISTILLATION

Technical specifications:
 - Power supply: 230V ±10% 50Hz
 - Power: 300W

RICAMBI

15-1101 FLASK, 1000 ml 29/32, pack of 3 pcs
 15.1092 LIEBIG CONDENSER, 400 mm., 29/32,
 15-1124/5 TRAP, 5 ml
 Joint 29/32, graduated to 0-5.0:0.1
 1290/1000 HEATING MANTLE
 For 1000 ml flask

DISTILLATION

DISTILLATION AT REDUCED PRESSURE

ASTM D1160 DISTILLATION OF PETROLEUM PRODUCTS AT REDUCED PRESSURE

This test method covers the determination, at reduced pressures, of the range of boiling points for petroleum products that can be partially or completely vaporized at a maximum liquid temperature of 400°C (752°F).

Consisting of 500 ml distillation flask with insulating mantle, vacuum jacketed distillation column with fused and condenser, a 200 ml jacket receiver, vacuum connections and cold trap. Electric heater with electronic regulator, digital indicator temperature with thermocouple for measurement vapor temperature, vacuum pump, manostate, vacuum gauge with mercury manometer (without mercury), transfer bath. The instrument is enclosed in a anodized aluminum structure with PMMA protection.

Technical specifications:

- Temperature: up to 400°C (752°F)

1070 DISTILLATION UNIT AT REDUCED PRESSURE

Consisting of 500 ml distillation flask with insulating mantle, vacuum jacketed distillation column with fused and condenser, a 200 ml jacket receiver, vacuum connections and cold trap. Electric heater with electronic regulator, digital indicator temperature with thermocouple for measurement vapor temperature, vacuum pump, vacuum sensor range 100-1 mmHg ± 0.1 mmHg, vacuum digital display, manually vacuum control valve, transfer bath. The instrument is enclosed in a anodized aluminum structure with PMMA protection.

1070/SEM SEMI-AUTOMATIC DISTILLATION UNIT AT REDUCED PRESSURE

CONSUMABLES x 2 YEARS

15-1073	ANTI-DRIP CHAIN x2
15-1074	FLASK, 500 ml., with insulating mantle x2

SPARE PARTS

15-1071	MERCURY MANOVACUOMETER (without mercury) (<i>only for 1070</i>)
15-1075	SILVERED VACUUM JACKETED COLUMN
15-1077	RECEIVER, 200 ml
15-1078	COLD TRAP
15-1079	MANOSTATE (<i>only for 1070</i>)
14-1070/150	THERMOCOUPLE
14-1070/250	THERMOCOUPLE
16-0005	DIGITAL THERMOREGULATOR
15-0004	BIPOLAR GREEN SWITCH
15-0110	ELECTRONIC REGULATOR
11-0990/3	QUARTZ HEATER, pack of 2 pcs
2460/RC4D	VACUUM PUMP



1070/SEM

2015

DISTILLATION

DEAN & STARK

ASTM D95 IP 74 EN 1428 WATER IN PETROLEUM PRODUCTS AND BITUMINOUS MATERIALS BY DISTILLATION

This test method covers the determination of water in the range from 0 to 25 % volume in petroleum products, tars, and other bituminous materials by the distillation method

ASTM D244 STANDARD TEST METHODS AND PRACTICES FOR EMULSIFIED ASPHALTS

This test method measures the amount of water present in the emulsified asphalt, as distinguished from either bitumen or petroleum solvent.

Consisting of a mantle heater with steel rod and clamp, 500 ml flask, 400 mm condenser Liebig and graduated 10 ml receiver type "A" conical bottom graduated tube 0-1.0:0.1 1.0-10:0.2, tapered joints 29/32.

Technical specifications:

- Power supply: 230V \pm 10% 50/60Hz

1090 DEAN & STARK APPARATUS

- Power: 300W

1090/2 DEAN & STARK APPARATUS (2 POSITIONS)

- Power: 600W

1090/3 DEAN & STARK APPARATUS (3 POSITIONS)

- Power: 900W

ACCESSORIES ON REQUEST

- 10-1093/25A RECEIVER TYPE "A", 25 ml
Conical joint 29/32, conical bottom, graduated to 0-1.0:0.1, 1.0-25:0.2
- 10-1093/5E RECEIVER TYPE "E", 5 ml
Conical joint 29/32, round bottom, graduated to 0-5.0:0.1
- 10-1093/5EP RECEIVER TYPE "E", 5 ml
Conical joint 29/32, round bottom, graduated to 0-5.0:0.05
- 10-1093/10A RECEIVER TYPE "A" 10 ml
Conical joint 29/32, conical bottom, with syphon, graduated to 0-1.0:0.1, 1.0-10:0.2
- 10-1093/10E RECEIVER TYPE "E", 10 ml
Conical joint 29/32, round bottom, graduated to 0-10:0.1
- 10-1093/2F RECEIVER TYPE "F", 2 ml
Conical joint 29/32, round bottom, graduated to 0-2.0:0.05
- 10-1093/244 RECEIVER 25 ml ASTM D244
Conical joint 29/32, conical bottom, graduated to 0-2.0:0.1, 2.0-25:0.2

SPARE PARTS

- 15-1091 FLASK, 500 ml 29/32, pack of 3 pcs
- 15.1092 LIEBIG CONDENSER, 400 mm., 29/32
- 15-1093/10A RECEIVER TYPE "A" 10 ml
Conical joint 29/32, conical bottom, graduated to 0-1.0:0.1, 1.0-10:0.2
- 1290/500 HEATING MANTLE
For 500 ml flask



WATER IN CRUDE OIL

ASTM D4006 IP 358 ISO 9029 WATER IN CRUDE OIL BY DISTILLATION

Consisting of a mantle heater with steel rod and clamp, 1000 ml flask, 400 mm condenser Liebig and graduated 5 ml receiver type "E" round bottom graduated tube 0-5.0:0.05, tapered joints 29/32 and drying tube.

Technical specifications:

- Power supply: 230V \pm 10% 50Hz

- Power: 300W


- Dimensions: \varnothing 35x135 cm

- Weight: 4 kg

1100 WATER IN CRUDE OIL DISTILLATION UNIT

SPARE PARTS

- 15-1101 FLASK, 1000 ml 29/32, pack of 3 pcs
- 15-1102 DRYING TUBE, pack of 3 pcs
- 15-1092 LIEBIG CONDENSER, 400 mm., 29/32,
- 15-1103 RECEIVER TYPE "E", 5 ml
Joint 29/32, round bottom, graduated to 0-5.0:0.05
- 1290/1000 HEATING MANTLE
For 1000 ml flask

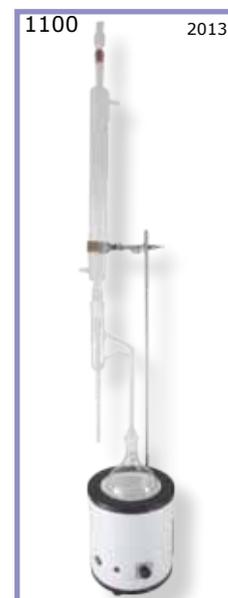

EXTRACTION RESIDUES SEDIMENT


CRUDE OIL AND FUEL OIL SEDIMENT

ASTM D473 IP 53 ISO 3735 SEDIMENT IN CRUDE OILS AND FUEL OILS BY THE EXTRACTION METHOD

This test method covers the determination of sediment in crude oils and fuel oils by extraction with toluene. The precision applies to a range of sediment levels from 0.01 to 0.40 % mass, although higher levels may be determined.

Consisting of: 1000 ml Erlenmeyer flask, stainless steel basket supporting an extraction thimble of alundum, cooling metal coil, glass water cup.

1130 SEDIMENT IN CRUDE AND FUEL OILS BY EXTRACTION APPARATUS

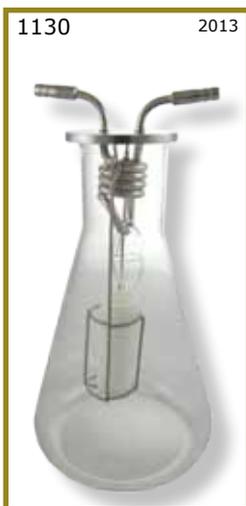

ACCESSORIES ON REQUEST

1280/S6 HEATING DEVICE
2470/BCA120 ANALYTICAL BALANCE
Range 120 g., readout 0.0001, pan Ø80

CONSUMABLES x 2 YEARS

15-1133 EXTRACTION THIMBLE, pack of 3 pcs x2

SPARE PARTS

15-1131 STAINLESS STEEL BASKET
15-1132/1000 ERLENMEYER FLASK, 1000 ml
15-1134 WATER CUP, pack of 3 pcs
15-1135 CONDENSER

ASPHALTENES

ASTM D6560 IP 143 DIN 51595 DETERMINATION OF ASPHALTENES (HEPTANE INSOLUBLES) IN CRUDE PETROLEUM AND PETROLEUM PRODUCTS

This test method covers a procedure for the determination of the heptane insoluble asphaltene content of gas oil, diesel fuel, residual fuel oils, lubricating oil, bitumen, and crude petroleum that has been topped to an oil temperature of 260°C (500°F)

Consisting of: an electric heater with support rod and clamps, a reflux extractor with 24/40 and 34/45 ground-glass joint, an 500 ml Erlenmeyer flask 24/40 and a condenser 34/45 and one glass stopper.

1140 DETERMINATION ASPHALTENES APPARATUS

Technical specifications:

- Power supply: 230V ±10% 50/60Hz
- Power: 700W



ACCESSORIES ON REQUEST

10-1141 FILTER PAPER, pack of 100 pcs
Grade 42, Ø110 mm
15-1132/1000 ERLENMEYER FLASK, 1000 ml 24/40
15-1132/250 ERLENMEYER FLASK, 250 ml 24/40
15-1132/150 ERLENMEYER FLASK, 150 ml 24/40
15-1132/100 ERLENMEYER FLASK, 100 ml 24/40
2470/BCA250 ANALYTICAL BALANCE
Range 250 g., readout 0.0001, pan Ø80
10-0332 DIGITAL STOPWATCH
7 digit LCD, max.10 hours, 1/100 sec,
digit h=8 mm

CONSUMABLES x 2 YEARS

10-1141 FILTER PAPER, pack of 100 pcs x4
Grade 42, Ø110 mm

SPARE PARTS

15-1141 REFLUX EXTRACTOR
15-1142 GLASS STOPPER
15-1144 CONDENSER
15-0110 ELECTRONIC REGULATOR
11-0022 HEATER
15-0004 BIPOLAR GREEN SWITCH

EXTRACTION RESIDUES SEDIMENT

LEAD AND SALT

ASTM D2547 (obs) IP 248 ISO 2083 LEAD IN GASOLINE, VOLUMETRIC CHROMATE METHOD

This method covers the volumetric determination of the total lead content of gasoline and other volatile distillates blended with lead alkyls within the concentration range of 0.2 to 4.2 g of lead/US gal or 0.04 to 1.1 g of lead/litre.

IP 77 DETERMINATION OF SALT CONTENT - EXTRACTION AND VOLUMETRIC TITRATION METHOD

This method is intended for the determination of total halide concentration of 0.002 to 0.02% wt, in crude petroleum, topped crude, residual cracking stock, and fuel oil. It may also be applied to the estimation of seawater contamination of used turbine oil and of marine diesel fuel.

IP 182 DETERMINATION OF INORGANIC ACIDITY OF PETROLEUM PRODUCTS - COLOUR INDICATOR TITRATION METHOD

This standard specifies a method for determining the water soluble inorganic (strong) acid content of used and unused lubricating oils, fuel oils, and petrolatum

Dual extractor apparatus with structure supports two independent sets of glassware: 2x boiling flask, 2x reflux condenser, 2x graduated funnel, 2x 600 ml beaker; controlled by two independent electronic regulator and cooling water supply.

2440 LEAD AND SALT EXTRACTION APPARATUS

Technical specifications:

- Power supply: 230V \pm 10% 50Hz
- Power: 500W
- Dimensions: 36x43x72 cm
- Weight: 15 kg

SPARE PARTS

- 11-2441 HEATER, pack of 2 pcs
- 15-2442 BOILING FLASK, 500 ml
- 15-2443 REFLUX CONDENSER
- 15-2444 THISTLE TUBE
- 15-2172 BEAKER, 600 ml
- 15-0110 ELECTRONIC REGULATOR
- 15-0004 BIPOLAR GREEN SWITCH

CONRADSON - CCR

ASTM D189 IP 13 ISO 6615 DIN 51551 CONRADSON CARBON RESIDUES OF PETROLEUM PRODUCTS

This test method covers the determination of the amount of carbon residue left after evaporation and pyrolysis of an oil, and is intended to provide some indication of relative coke-forming propensities

LPG-heated by Meker lamp fitted with safety valve. Insulating ring block, metal tripod holder with Nichrome triangle, stainless steel chimney. Inner porcelain crucible, middle iron crucible fitted with Skidmore lid and external iron crucible fitted with lid.

960 GAS CONRADSON

ACCESSORIES ON REQUEST

- 2470/BC160 ELECTRONIC BALANCE
Range 160 g., readout 0.001, pan \varnothing 110

CONSUMABLES x 2 YEARS

- 15-0961 PORCELAIN CRUCIBLE, pack of 5 pcs x2
- 15-0964 SKIDMORE COVER, pack of 2 pcs x2

SPARE PARTS

- 15-0962 MEDIUM IRON CRUCIBLE
- 15-0963 EXTERNAL IRON CRUCIBLE
- 15-0966 WIRE SUPPORT, NiCr
- 15-0967 COVER FOR EXTERNAL IRON CRUCIBLE
- 15-0968 MEKER LAMP

ASTM D2416 COKING VALUE OF TAR AND PITCH

This test method covers the determination of the coking value of tar and pitch having an ash content not over 0.5%

Muffle furnace, insulating ring block, stainless steel chimney. Inner porcelain crucible, middle iron crucible fitted with Skidmore lid and external iron crucible fitted with lid.

970 ELECTRIC CONRADSON

Technical specifications:

- Temperature: up to 1100°C (2012°F)
- Power supply: 230V \pm 10% 50/60Hz
- Power: 4500W
- Dimensions: 56x66x65+34 cm
- Weight: 75 kg



EXTRACTION RESIDUES SEDIMENT

RAMSBOTTOM - RCRT

ASTM D524 IP 14 ISO 4262 RAMSBOTTOM CARBON RESIDUES OF PETROLEUM PRODUCTS

This test method covers the determination of the amount of carbon residue left after evaporation and pyrolysis of an oil, and it is intended to provide some indication of relative coke-forming propensity.



Heating block made of casting iron to 5 cells, external structure made of stainless steel, heating unit controlled by a digital thermoregulator PID with thermocouple J and overtemperature alarm., front digital thermometer with ceramic thermocouple J into a stainless steel crucible control. Cavity insulation with high efficiency.

Technical specifications:

- Temperature: from ambient to 600°C (1112°F)
- Stability: ±1°C
- Power supply: 230V ±10% 50Hz
- Power: 1700W
- Dimensions: 50x50x70 cm
- Weight: 38 kg

980 RAMSBOTTOM

ACCESSORIES ON REQUEST

- | | |
|-------------|---------------------------------------|
| 2470/BCA200 | ANALYTICAL BALANCE |
| | Range 220 g., readout 0.0001, pan Ø80 |
| 10-0981 | COKING BULB, pack of 10 pcs |
| | Borosilicate glass |
| 10-0982 | LUER-LOCK SYRINGE |
| | 10 ml |
| 10-0983 | TONG |
| | To handle glass coking bulb |
| 10-0984 | FILLING DEVICE |
| | 5 positions, for filling coking bulb |

CONSUMABLES x 2 YEARS

- | | |
|---------|---------------------------------|
| 10-0981 | COKING BULB, pack of 10 pcs x10 |
|---------|---------------------------------|

SPARE PARTS

- | | |
|------------|-----------------------------------|
| 15-0982/A | NEEDLE |
| 15-0982/S | SYRINGE, 10 ml |
| 15-0985 | CONTROL BULB |
| | Made of stainless steel |
| 14-0980 | THERMOCOUPLE TYPE J |
| 14-0980/CR | CONTROL THERMOCOUPLE TYPE J |
| | Made of ceramic, for control bulb |
| 11-0980 | HEATER |
| 15-0015 | STATIC RELAY |
| 15-0004 | BIPOLAR GREEN SWITCH |

ASTM D4072 TOULENE-INSOLUBLE CONTENT OF TAR AND PITCH

Flask with metal cap condenser, wire support, extraction thimble of alundum. Without filter paper.

1110 DETERMINATION OF TOULENE IN TAR AND PITCH APPARATUS

ACCESSORIES ON REQUEST

- | | |
|------------|------------------|
| 10-1112/30 | ASTM SIEVE NO.30 |
| | 600 µm, Ø200 mm |
| 10-1112/60 | ASTM SIEVE NO.60 |
| | 250 µm, Ø200 mm |
| 1280/S6 | HEATING DEVICE |

CONSUMABLES x 2 YEARS

- | | |
|---------|-----------------------------------|
| 15-1111 | ALUNDUM THIMBLE, pack of 2 pcs x2 |
|---------|-----------------------------------|

SPARE PARTS

- | | |
|---------|-------|
| 15-1112 | FLASK |
|---------|-------|

EXTRACTION RESIDUES SEDIMENT

TOTAL SEDIMENT

ASTM D4870 IP 375 IP 390 (PROC.A) ISO 10307-1-2 DETERMINATION OF TOTAL SEDIMENT IN RESIDUAL FUELS

This test method covers the determination of total sediment up to 0.40% m/m for distillate fuel oils containing residual components and to 0.50% m/m in residual fuel oils having a maximum viscosity of 55 cSt (mm²/s) at 100°C (212°F)

Stainless steel structure with two filtration groups comprises two sintered brass disk, circuit of heating with steam and cooling with water; vacuum circuit complete with regulation valve, 500 ml flask fitted with protection mesh and vacuum manometer.

Technical specifications:

- Temperature: from ambient to 100°C (212°F)
- Dimensions: 635x220x456cm
- Weight: 15Kg

1150 TOTAL SEDIMENT

CONSUMABLES x 2 YEARS

- 10-1153 GFA FILTER, pack of 100 pcs. x2
- 15-1158 SINTERED DISC, pack of 2 pcs x2

Only for IP 390 ISO 10307-2

- 10-1156 CONICAL FLASK, pack of 10 pcs x1
- 10-1157 AIR CONDENSER TUBE, pack of 10 pcs x1

SPARE PARTS

- 15-1156 VACUUM FLASK, 500 ml, pack of 2 pcs
With protection mesh
- 15-1157 VACUUM GAUGE
- 15-1159/T SETS OF TUBES
For vacuum and water/steam

ACCESSORIES ON REQUEST

- 2470/BCA200 ANALYTICAL BALANCE
Range 220 g., readout 0.0001, pan Ø80
- 10-1152 PETRI DISH, pack of 2 pcs
Ø60x20 mm
- 10-1153 GFA FILTER, pack of 100 pcs
Ø47 mm
- 10-1154 STEAM GENERATOR
2460/SC5
- VACUUM PUMP
T-4870
- THERMOMETER
Scale 95° +105°C, div.0.5°

Only for IP 390 ISO 10307-2

- 10-1155 AGEING BATH
With 6 air wells
- 10-1156 CONICAL FLASK, pack of 10 pcs
50 ml, with cork
- 10-1157 AIR CONDENSER TUBE, pack of 10 pcs
Made of glass
- T-AS22C THERMOMETER ASTM 22C IP 24C
- T-AS1C THERMOMETER ASTM 1C



2016

EXTRACTION RESIDUES SEDIMENT

ANILINE

ASTM D611 (MET.A) IP 2 (MET.A) ANILINE POINT AND MIXED ANILINE POINT OF PETROLEUM PRODUCTS AND HYDROCARBON SOLVENTS

Test Method A is suitable for transparent samples with an initial boiling point above room temperature and where the aniline point is below the bubble point and above the solidification point of the aniline-sample mixture.

Consisting of: electric heater device with rod and clamp, Pyrex jacket Ø40x175 mm, Pyrex test tube Ø25x150 mm, manual stirrer, two corks.

Technical specifications:

- Temperature: from ambient to 200°C (392°F)
- Power supply: 230V ±10% 50/60Hz
- Power: 700W
- Dimensions: 13x21x55 cm
- Weight: 3 kg

2150/A ANILINE POINT METHOD "A"



ACCESSORIES ON REQUEST

- | | |
|------------|---------------------------------------|
| 2470/BC160 | ANALYTICAL BALANCE |
| | Range 160 g., readout 0.001, pan Ø110 |
| T-AS33C | THERMOMETER ASTM 33C IP 20C |
| T-AS34C | THERMOMETER ASTM 34C IP 21C |
| T-AS35C | THERMOMETER ASTM 35C IP 59C |

CONSUMABLES x 2 YEARS

- | | |
|-----------|----------------------------------|
| 10-1441/D | TEST TUBE, pack of 10 pcs x1 |
| | Ø25x150 mm |
| 15-2153 | MANUAL STIRRER, pack of 3 pcs x1 |
| 15-2154 | CORK, pack of 2 pcs, x2 |

SPARE PARTS

- | | |
|---------|----------------------------|
| 15-2151 | JACKET TUBE, pack of 2 pcs |
| 15-0110 | ELECTRONIC REGULATOR |
| 11-0022 | HEATER |

ASTM D611 (MET.B) IP 2 (MET.B) ANILINE POINT AND MIXED ANILINE POINT OF PETROLEUM PRODUCTS AND HYDROCARBON SOLVENTS

Test Method B, a thin-film method, is suitable for samples too dark for testing by Test Method A.

ACCESSORIES ON REQUEST

- | | |
|------------|---------------------------------------|
| 2470/BC160 | ANALYTICAL BALANCE |
| | Range 160 g., readout 0.001, pan Ø110 |
| T-AS33C | THERMOMETER ASTM 33C IP 20C |
| | (2 thermometers request for working) |
| T-AS34C | THERMOMETER ASTM 34C IP 21C |
| | (2 thermometers request for working) |
| T-AS35C | THERMOMETER ASTM 35C IP 59C |
| | (2 thermometers request for working) |

Consisting of: electric heater device with electronic regulator, speed regulator for pumping and stirrer of sample and light low voltage regulator; 800 ml Pyrex jar, adjustable support for pumping motor, Pyrex tube, Pyrex pump body, stainless steel pump rotor. Blocking cover with manual bath stirrer and cooling coil for external connection.

Technical specifications:

- Temperature: from ambient to 200°C (392°F)
- Power supply: 230V ±10% 50Hz
- Power: 700W
- Dimensions: 26x26x62 cm
- Weight: 6 kg

2150/B ANILINE POINT METHOD "B"



CONSUMABLES x 2 YEARS

- | | |
|---------|-------------------------|
| 15-0033 | LAMP, pack of 10 pcs x1 |
|---------|-------------------------|

SPARE PARTS

- | | |
|-----------|----------------------------|
| 15-2155 | JAR, pack of 2 pcs |
| 15-2156 | TUBE |
| 15-2157 | MANUAL STIRRER FOR BATH |
| 15-2158 | STAINLESS STEEL PUMP ROTOR |
| 15-2159 | PUMP BODY |
| 15-0110 | ELECTRONIC REGULATOR |
| 15-2151/L | LIGHT REGULATOR |
| 15-2151/P | SPEED REGULATOR |
| 11-0022 | HEATER |

EXTRACTION RESIDUES SEDIMENT

ASTM D611 (MET.C) IP 2 (MET.C) ANILINE POINT AND MIXED ANILINE POINT OF PETROLEUM PRODUCTS AND HYDROCARBON SOLVENTS

Test Methods C is for samples that may vaporize appreciably at the aniline point.

ACCESSORIES ON REQUEST

T-AS33C	THERMOMETER ASTM 33C IP 20C (2 thermometers request for working)
T-AS34C	THERMOMETER ASTM 34C IP 21C (2 thermometers request for working)
T-AS35C	THERMOMETER ASTM 35C IP 59C (2 thermometers request for working)

Consisting of: electric heater device, test tube Ø22x150 mm, corks, support and clamp.

Technical specifications:

- Temperature: from ambient to 200°C (392°F)
- Power supply: 230V ±10% 50/60Hz
- Power: 700W

2150/C

ANILINE POINT METHOD "C"

CONSUMABLES x 2 YEARS

15-2152/C	TEST TUBE, pack of 2 pcs x1
15-2151/C	THERMOMETER TUBE
15-2154/C	CORK x2

SPARE PARTS

15-0110	ELECTRONIC REGULATOR
11-0022	HEATER

ASTM D611 (MET.D) IP 2 (MET.D) ANILINE POINT AND MIXED ANILINE POINT OF PETROLEUM PRODUCTS AND HYDROCARBON SOLVENTS

Test Methods C and D are for samples that may vaporize appreciably at the aniline point; particularly suitable where only small quantities of sample are available.

ACCESSORIES ON REQUEST

T-AS33C	THERMOMETER ASTM 33C IP 20C
T-AS34C	THERMOMETER ASTM 34C IP 21C
T-AS35C	THERMOMETER ASTM 35C IP 59C

Consisting of: electric heater device, 2 ml bulb, corks, support and clamp

Technical specifications:

- Temperature: from ambient to 200°C (392°F)
- Power supply: 230V ±10% 50/60Hz
- Power: 700W

2150/D

ANILINE POINT METHOD "D"

CONSUMABLES x 2 YEARS

15-2152/D	BULB, pack of 2 pcs x1
15-2154/D	CORK x2

SPARE PARTS

15-0110	ELECTRONIC REGULATOR
11-0022	HEATER

IP 2 (MET.F) - Ed. 1956 - ANILINE POINT AND MIXED ANILINE POINT OF PETROLEUM PRODUCTS AND HYDROCARBON SOLVENTS

ACCESSORIES ON REQUEST

2470/BC160	ELECTRONIC BALANCE Range 160 g., readout 0.001, pan Ø110
------------	---

For IP 2 (Ed.1956). Electric heater device with electric motor stirrer, 600 ml Pyrex jar, "U-tube" in glass with metallic screen, low voltage lamp, cover in material plastic resistant to the heat, auction with helix helical inox, cooling coil, manual stirrer for the bath.

Technical specifications:

- Temperature: from ambient to 200°C (392°F)
- Power supply: 230V ±10% 50/60Hz
- Power: 700W

2150/F

ANILINE POINT METHOD "F"

CONSUMABLES x 2 YEARS

15-0033	LAMP, pack of 10 pcs
15-2152/F	U-TUBE, pack of 2 pcs

SPARE PARTS

15-2155	JAR, 600 ml
15-0110	ELECTRONIC REGULATOR
11-0022	HEATER

EXTRACTION RESIDUES SEDIMENT

FIA

ASTM D1319 IP 156 ISO 3837 HYDROCARBON TYPES IN LIQUID PETROLEUM PRODUCTS BY FLUORESCENT INDICATOR ADSORPTION

This test method covers the determination of hydrocarbon types over the concentration ranges from 5 to 99 volume % aromatics, 0.3 to 55 volume % olefins, and 1 to 95 volume % saturates in petroleum fractions that distill below 315°C (599°F).

Flat support made in black material equipped with spring connections that block the standard column with spherical joint 28/12 with analyzer replaceable, 1000 mm stainless steel ruler with sliding pointers, socket places fitted with a reducer and manometer for controlling the nitrogen pumped into the columns, stainless steel lamps holder with 365nm UV light source.

2240/S/2 FIA STANDARD (2 POSITIONS)

Technical specifications:

- Power supply: 230V ±10% 50/60Hz
- Power: 36W

2240/S/4 FIA STANDARD (4 POSITIONS)

Technical specifications:

- Power supply: 230V ±10% 50/60Hz
- Power: 72W
- Dimensions: 78x40x216 cm
- Weight: 37 kg

Flat support made in black material equipped with spring connections that block the precision bore column with spherical joint 28/12 with analyzer, 1000 mm stainless steel ruler with sliding pointers, socket places fitted with a reducer and manometer for controlling the nitrogen pumped into the columns, stainless steel lamps holder with 365nm UV light source.

2240/P/2 FIA PRECISION (2 POSITIONS)

Technical specifications:

- Power supply: 230V ±10% 50/60Hz
- Power: 36W

2240/P/4 FIA PRECISION (4 POSITIONS)

Technical specifications:

- Power supply: 230V ±10% 50/60Hz
- Power: 72W
- Dimensions: 78x40x216 cm
- Weight: 37 kg

ACCESSORIES ON REQUEST

- 10-2241 PORTABLE VIBRATOR
- 10-2242 SYRINGE
1 ml., div. 0.01 ml.
- 10-2242/A NEEDLE , pack of 6 pcs
L=102 mm.
- 10-2243 SILICA GEL 923, pack of 2 kg
Grade 923, 100-200 mesh
- 10-2244 FLUORESCENT INDICATOR DYED GEL,
pack of 40 g
- 10-2245 ATTAPULGITE, pack of 2 kg
RVM 30-60 mesh
- 10-2246 CLEANING CAPILLARY
Made of stainless steel AISI 304 L=1.3 m

CONSUMABLES x 2 YEARS

- 10-2243 SILICA GEL 923, pack of 2 kg x1
- 10-2244 FLUORESCENT INDICATOR DYED GEL, x2
pack of 40 g
- 10-2245 ATTAPULGITE, pack of 2 kg x2
- 15-2240/S STANDARD COLUMN, pack of 2 pcs x2
- 15-2240/P PRECISION BORE COLUMN, pack of 2 pcs x2
- 15-2241 ANALYSER TUBE 1.5X1220 MM, conf.25 pz. x4

SPARE PARTS

- 15-2242 SPHERICAL JOINT "28", pack of 2 pcs
- 15-2244 CLAMP FOR SPHERICAL "28", pack of 2 pcs
- 15-2245 TIP OF PRECISION BORE "12",
pack of 2 pcs
- 15-2246 CLAMP FOR SPHERICAL "12", pack of 2 pcs
- 15-2247 REGULATOR
- 15-2243/L ULTRAVIOLET LIGHT LAMP
- 15-2243/S STARTER FOR LAMP, pack of 2 pcs
- 15-2248/R STAINLESS STEEL RULE, 1000 mm
- 15-2248/P POINT, pack of 4 pcs



EXTRACTION RESIDUES SEDIMENT

DEPENTANIZATION

ASTM D2001 DEPENTANIZATION OF GASOLINE AND NAPHTHAS

This test method covers the removal of pentanes and lighter hydrocarbons from gasolines, naphthas, and similar petroleum distillates to prepare samples suitable for the determination of hydrocarbon types in accordance with Test Method D2789. In addition, this test method determines the volume percent of bottoms remaining after depentanization.

Consisting of: distillation column, reflux condenser head, light-ends trap, 12.5ml graduated receiver, clamp for spherical pieces, Dewar jar, thermometer tapered cap, electric heater jacket.

Technical specifications:

- Power supply: 230V \pm 10% 50/60Hz
- Power: 300W

2280 DEPENTANIZATION "PONA"

ACCESSORIES ON REQUEST

- 10-2281 HELI-PAK B+C, pack of 100+100 ml.
- T-AS38C THERMOMETER ASTM 38C

CONSUMABLES x 2 YEARS

- 10-2281 HELI-PAK B+C, pack of 100+100 ml.. x2

SPARE PARTS

- 15-2282 DISTILLATION COLUMN
- 15-2283 REFLUX CONDENSER HEAD
- 15-2284 LIGHT-ENDS TRAP
- 15-2285 RECEIVER GRADUATED
- 15-2286 FLASK 100 ml
- 15-2287 CONICAL STOPPER FOR THERMOMETER
- 15-2288 CLAMP FOR SPHERICAL
- 15-2289 DEWAR



ISOLATION

ASTM D2002 (obs) ISOLATION OF REPRESENTATIVE SATURATES FRACTION FROM LOW-OLEFINIC PETROLUUM NAPHTHAS

Procedure for determination of isolation of representative saturates fraction from low-olefinic petroleum naphthas with distillation below at 240°C (400°F) with <1% olefinic petroleum



Consisting of: adsorption column with upper female tapered linkage and male tapered cap equipped with connection, structure made of aluminum.

2290 FRACTIONAL COLUMN

ACCESSORIES ON REQUEST

- 10-2291 RECEIVER GRADUATED, 11 ml
- 10-2241 PORTABLE VIBRATOR
- 10-2242 SYRINGE
1 ml., div. 0.01 ml.
- 10-2242/A NEEDLE, pack of 6 pcs
L=102 mm.
- 10-2243 SILICA GEL 923, pack of 2 kg
Grade 923, 100-200 mesh
- 10-2244 FLUORESCENT INDICATOR DYED GEL,
pack of 40 g
- 15-2243 ULTRAVIOLET LIGHT LAMP
- 15-2223 REDUCER GAUGE

CONSUMABLES x 2 YEARS

- 10-2243 SILICA GEL 923, pack of 2 kg x1
- 10-2244 FLUORESCENT INDICATOR DYED GEL, x2
pack of 40 g

SPARE PARTS

- 15-2292 ADSORPTION COLUMN
- 15-2293 CONICAL STOPPER

EXTRACTION RESIDUES SEDIMENT

ASH

ASTM D482 IP 4 ISO 6245 ASH FROM PETROLEUM PRODUCTS

This test method covers the determination of ash in the range 0.001–0.180 mass %, from distillate and residual fuels, gas turbine fuels, crude oils, lubricating oils, waxes, and other petroleum products, in which any ash-forming materials present are normally considered to be undesirable impurities or contaminants. The test method is limited to petroleum products which are free from added ash-forming additives, including certain phosphorus compounds.

ASTM D874 IP 163 ISO 3987 SULFATED ASH FROM LUBRICATING OILS AND ADDITIVES

This test method covers the determination of the sulfated ash from unused lubricating oils containing additives and from additive concentrates used in compounding. These additives usually contain one or more of the following metals: barium, calcium, magnesium, zinc, potassium, sodium, and tin. The elements sulfur, phosphorus, and chlorine can also be present in combined form. Application of this test method to sulfated ash levels below 0.02 mass % is restricted to oils containing ashless additives. The lower limit of the test method is 0.005 mass % sulfated ash.


ASTM D4422 ASH IN ANALYSIS OF PETROLEUM COKE

The heat insulation is made in ceramics fibre in order to get a speed heating with a limited energetic consumption. Heating muffle, unthreaded from the back, in an only cast of refractory cordieletic material to provide for thermic jolits. Resistors in KANTHAL screened. Lateral opening door with pressure wedge and with a stop device for electric feeding when it opens, allowing the worker, during the loading and unloading of the muffle, to act with the utmost safety avoiding the contact with the burning part. Natural draught posterior exhaust of the smokes. Control panel is positioned on the furnace bottom containing a digital visualized thermoregulator and magnetic thermic for protection system.

Technical specifications:

- Temperature: from ambient to 1100°C (2012°F)
- Power supply: 230V ±10% 50/60Hz
- Power: 2300W
- Dimensions: 40x58x54 cm external
14.5x25x10 cm internal
- Weight: 40 kg

2720 ASH DETERMINATION APPARATUS

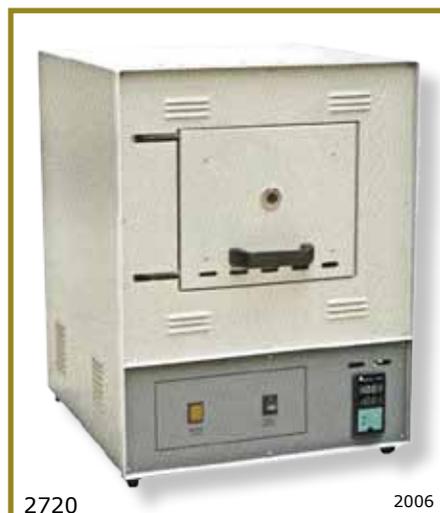

ACCESSORIES ON REQUEST

For ASTM D482 IP 4

- 2470/BCA200 ANALYTICAL BALANCE
Range 220 g., readout 0.0001, pan Ø80
- 10-2722 CRUCIBLE 100 ml, pack of 5 pcs
Made of porcelain
- 15-0745 MEKER LAMP

For ASTM D874 IP 163

- 2470/BCA200 ANALYTICAL BALANCE
Range 220 g., readout 0.0001, pan Ø80
- 10-2722 CRUCIBLE
Made of porcelain, 100 ml., pack of 5 pcs
- 10-2723 CRUCIBLE
Made of porcelain, 150 ml, pack of 5 pcs

For ASTM D4422

- 2470/BCA200 ANALYTICAL BALANCE
Range 220 g., readout 0.0001, pan Ø80
- 10-2724 CRUCIBLE
Made of porcelain, 30 ml., pack of 5 pcs

EXTRACTION RESIDUES SEDIMENT

CENTRIFUGE

ASTM D91 PRECIPITATION NUMBER OF LUBRICATING OILS

This test method covers the determination of the precipitation number of steam cylinder stocks and black oils, and can be used for other lubricating oils.

ASTM D96 (obs) WATER AND SEDIMENT IN CRUDE OIL BY CENTRIFUGE METHOD (FIELD PROCEDURE)

ASTM D893 INSOLUBLES IN USED LUBRICATING OILS

This test method covers the determination of pentane and toluene insolubles in used lubricating oils.

ASTM D1290 SEDIMENT IN WATER-EMULSION POLISHES BY CENTRIFUGE

ASTM D1796 WATER AND SEDIMENT IN FUEL OILS

This test method describes the laboratory determination of water and sediment in fuel oils in the range from 0 to 30 % volume by means of the centrifuge procedure.

ASTM D1966 (obs) FOOTS IN RAW LINSEED OIL (GRAVIMETRIC METHOD)

ASTM D2273 TRACE SEDIMENT IN LUBRICATING OILS

This test method covers the determination of trace amounts (less than 0.05 volume %) of sediment in lubricating oils.

ASTM D2709 WATER AND SEDIMENT IN MIDDLE DISTILLATE FUELS

This test method covers the determination of the volume of free water and sediment in middle distillate fuels having viscosities at 40°C (104°F) in the range of 1.0 to 4.1 mm²/s (1.0 to 4.1 cSt) and densities in the range of 770 to 900 kg/m³.

ASTM D2711 DEMULSIBILITY CHARACTERISTICS OF LUBRICATING OILS

This test method covers the measurement of the ability of oil and water to separate from each other. It is intended for use in testing medium and high-viscosity lubricating oils.

ASTM D4007 WATER AND SEDIMENT IN CRUDE OIL

This test method describes the laboratory determination of water and sediment in crude oils by means of the centrifuge procedure.

IP 75 (obs); IP 359; DIN 51793 WATER AND SEDIMENT IN CRUDE OIL BY CENTRIFUGE

Four places model for anti-vibration table, is equipped with a star wheel that has 4 rings swinging up to 90°, max. 2000 rpm speed, 482.6 mm maximum rotation diameter. Speed is regulated electronically and shown on a digital display. Centrifuging time is set by a digital timer which operates an electric brake (that can be excluded) when the test is finished, electric heating (that can be excluded) controlled by digital thermoregulator PID and overtemperature alarm. Max. temperature 80°C. The heater and the brake can be cut out. Lid fitted with safety device which stops the motor when the lid opens

Technical specifications:

- Temperature: from ambient to 80°C (176°F)
- Stability: ±1°C
- Power supply: 230V ±10% 50/60Hz
- Power: 2200W
- Dimensions: 60x76x62 (120 with cover open) cm
- Weight: 75 kg

1220 CENTRIFUGE



EXTRACTION RESIDUES SEDIMENT

ACCESSORIES ON REQUEST

For ASTM D91

- 1230 WATER BATH
 10-1222 BUCKET FOR CONE-SHAPED TUBE, pack of 4 pcs
 For 10-1225 and 10-1226, made of aluminum, included Polyurethane support for tube
 10-1225 CENTRIFUGE TUBE CONE-SHAPED, pack of 4 pcs
 100 ml, 203 mm, div. from 0 to 0.5:0.05, from 0.5 to 2:0.1, from 2 to 3:0.2, from 3 to 5:0.5, from 5 to 10:1, from 10 to 25:5, from 25 to 100:25
 10-1225/W WATER BATH RACK
 For 10-1225, 4 positions

For ASTM D96

- 1230 WATER BATH
 10-1221 BUCKET FOR PEAR-SHAPED TUBE, pack of 4 pcs
 For 10-1224, made of aluminum, included Polyurethane support for tube
 10-1224 PEAR-SHAPED TUBE, pack of 4 pcs
 100 ml, div. from 0 to 1.5:0.1, from 2 to 10:0.1, from 10 to 25:5, 50, 100
 10-1222 BUCKET FOR CONE-SHAPED TUBE, pack of 4 pcs
 For 10-1225 and 10-1226, made of aluminum, included Polyurethane support for tube
 10-1225 CENTRIFUGE TUBE CONE-SHAPED, pack of 4 pcs
 100 ml, 203 mm, div. from 0 to 0.5:0.05, from 0.5 to 2:0.1, from 2 to 3:0.2, from 3 to 5:0.5, from 5 to 10:1, from 10 to 25:5, from 25 to 100:25
 10-1223 BUCKET FOR CONE-SHAPED TUBE, pack of 4 pcs
 For 10-1227, made of aluminum, included Polyurethane support for tube
 10-1227 CENTRIFUGE TUBE CONE-SHAPED, pack of 4 pcs
 100 ml, 152 mm, div. from 0 to 0.5:0.05, from 0.5 to 2:0.1, from 2 to 3:0.2, from 3 to 5:0.5, from 5 to 10:1, from 10 to 25:5, 50, 100
 10-1224/W WATER BATH RACK
 For 10-1224, 4 positions
 10-1225/W WATER BATH RACK
 For 10-1225, 4 positions
 10-1227/W WATER BATH RACK
 For 10-1227, 4 positions

For ASTM D893

- 2470/BC160 ELECTRONIC BALANCE
 Range 160 g., readout 0.001, pan Ø110
 10-1222 BUCKET FOR CONE-SHAPED TUBE, pack of 4 pcs
 For 10-1225 and 10-1226, made of aluminum, included Polyurethane support for tube
 10-1225 CENTRIFUGE TUBE CONE-SHAPED, pack of 4 pcs
 100 ml, 203 mm, div. from 0 to 0.5:0.05, from 0.5 to 2:0.1, from 2 to 3:0.2, from 3 to 5:0.5, from 5 to 10:1, from 10 to 25:5, from 25 to 100:25

For ASTM D1796

- 1230 WATER BATH
 10-1222 BUCKET FOR CONE-SHAPED TUBE, pack of 4 pcs
 For 10-1225 and 10-1226, made of aluminum, included Polyurethane support for tube
 10-1225 CENTRIFUGE TUBE CONE-SHAPED, pack of 4 pcs
 100 ml, 203 mm, div. from 0 to 0.5:0.05, from 0.5 to 2:0.1, from 2 to 3:0.2, from 3 to 5:0.5, from 5 to 10:1, from 10 to 25:5, from 25 to 100:25
 10-1225/W WATER BATH RACK
 For 10-1225, 4 positions

For ASTM D2273

- 1230 WATER BATH
 10-1222 BUCKET FOR CONE-SHAPED TUBE, pack of 4 pcs
 For 10-1225 and 10-1226, made of aluminum, included Polyurethane support for tube
 10-1226 CENTRIFUGE TUBE CONE-SHAPED, pack of 4 pcs
 100 ml, 203 mm, div. from 0 to 0.01:0.005,

- from 0.01 to 0.05:0.01, from 0.05 to 0.5:0.05, 50, 100
 10-1226/W WATER BATH RACK
 For 10-1226, 4 positions

For ASTM D2709

- 1230 WATER BATH
 10-1221 BUCKET FOR PEAR-SHAPED TUBE, pack of 4 pcs
 For 10-1224, made of aluminum, included Polyurethane support for tube
 10-1224 PEAR-SHAPED TUBE, pack of 4 pcs
 100 ml, div. from 0 to 1.5:0.1, from 2 to 10:0.1, from 10 to 25:5, 50, 100
 10-1222 BUCKET FOR CONE-SHAPED TUBE, pack of 4 pcs
 For 10-1225 and 10-1226, made of aluminum, included Polyurethane support for tube
 10-1226 CENTRIFUGE TUBE CONE-SHAPED, pack of 4 pcs
 100 ml, 203 mm, div. from 0 to 0.01:0.005, from 0.01 to 0.05:0.01, from 0.05 to 0.5:0.05, 50, 100
 10-1224/W WATER BATH RACK
 For 10-1224, 4 positions
 10-1226/W WATER BATH RACK
 For 10-1226, 4 positions

For ASTM D2711

- 10-1222 BUCKET FOR CONE-SHAPED TUBE, pack of 4 pcs
 For 10-1225 and 10-1226, made of aluminum, included Polyurethane support for tube
 10-1225 CENTRIFUGE TUBE CONE-SHAPED, pack of 4 pcs
 100 ml, 203 mm, div. from 0 to 0.5:0.05, from 0.5 to 2:0.1, from 2 to 3:0.2, from 3 to 5:0.5, from 5 to 10:1, from 10 to 25:5, from 25 to 100:25

For ASTM D4007

- 1230 WATER BATH
 10-1222 BUCKET FOR CONE-SHAPED TUBE, pack of 4 pcs
 For 10-1225 and 10-1226, made of aluminum, included Polyurethane support for tube
 10-1225 CENTRIFUGE TUBE CONE-SHAPED, pack of 4 pcs
 100 ml, 203 mm, div. from 0 to 0.5:0.05, from 0.5 to 2:0.1, from 2 to 3:0.2, from 3 to 5:0.5, from 5 to 10:1, from 10 to 25:5, from 25 to 100:25
 10-1225/W WATER BATH RACK
 For 10-1225, 4 positions

CONSUMABLES x 2 YEARS

- 15-1223 POLYURETHANE SUPPORT, pack of 4 pcs x2

SPARE PARTS

- 11-1220 HEATER
 16-0005 DIGITAL THERMOREGULATOR
 16-0039 DIGITAL RPM
 16-0080 DIGITAL TIMER
 15-0015 STATIC RELAY
 15-0004 BIPOLAR GREEN SWITCH
 15-0005 BIPOLAR YELLOW SWITCH

EXTRACTION RESIDUES SEDIMENT

SULFONATION

ASTM D1019 (obs) IP 145 (obs) ISO 3840 OLEFINIC PLUS AROMATIC HYDROCARBONS IN PETROLEUM DISTILLATES
This method covers the determination of olefinic plus aromatic hydrocarbons in gasolines, naphthas, kerosenes, and other petroleum distillates that are substantially free from butanes and butenes

Consisting of 4 places shaking machine, centrifuge, 4 standard sulfonation flask 100% graduated 2% (10 ml graduated 0.2ml), 4 buckets with rubber pads, 4 ice water jar.

1200 SULFONATION NUMBER APPARATUS

ACCESSORIES ON REQUEST

2470/BC160	ELECTRONIC BALANCE Range 160 g., readout 0.001, pan Ø110
480/40	CRYOSTAT UP TO -40°C
10-1230	PRECISION FLASK FOR SULFONATION 10 ml., pack of 4 pcs
10-1231	PRECISION FLASK FOR SULFONATION 5 ml., pack of 4 pcs
10-1232	BUCKET FOR PRECISION FLASK, pack of 4 pcs

CONSUMABLES x 2 YEARS

15-1223	POLYURETHANE SUPPORT, pack of 4 pcs x2
15-1233	STANDARD SULFONATION FLASK, pack of 4 pcs
15-1202	ICE WATER JAR, pack of 4 pcs x2

UNSULFONATED RESIDUE

ASTM D483 UNSULFONATED RESIDUE OF PETROLEUM PLANT SPRAY OILS

This test method covers the determination of unsulfonated residue in plant spray oils of petroleum origin and applies only to the petroleum oil content. It provides a measure of the degree of refinement of plant spray oils by determining the extent to which the oil is attacked by 98.61 % sulfuric acid under closely standardized conditions.

Consisting of:

- four places centrifuge model for anti-vibration table, is equipped with a star wheel that has 4 rings swinging up to 90°, max. 2000 rpm speed, 482.6 mm maximum rotation diameter. Speed is regulated electronically and shown on a digital display. Centrifuging time is set by a digital timer which operates an electric brake (that can be excluded) when the test is finished, electric heating (that can be excluded) controlled by digital thermoregulator PID and overtemperature alarm. Max. temperature 80°C. The heater and the brake can be cut out. Lid fitted with safety device which stops the motor when the lid opens
- Structure in painted sheet composed of a water bath in stainless steel for temperatures up to 100°C ± 0.1°, 4 positions shaker with removable media for a fast and easy transfer of sulfonation flask to and from the bathroom, adjustment cycles per minute from 300 to 500 ±10 cycles/min, stopwatch for setting the shaking time,
- 4 Sulfonation flask 50% graduated 0.5% (5 ml graduated 0.05 ml) 50 ±5 ml to base of neck
- 4 buckets with Polyurethane support

CONSUMABLES x 2 YEARS

15-1223	POLYURETHANE SUPPORT, pack of 4 pcs x2
15-1211	SULFONATION FLASK, pack of 4 pcs

ACCESSORIES ON REQUEST

2470/BC160	ELECTRONIC BALANCE Range 160 g., readout 0.001, pan Ø110
1230	WATER/OIL BATH Structure made of stainless steel, temperature regulation by digital thermoregulator PID with PT100 probe class A and overtemperature alarm, stainless steel heater, cooling coil, motor stirrer, insulated double wall, safety internal level for low liquid with warning lamp.

1210 UNSULFONATED RESIDUE



EXTRACTION RESIDUES SEDIMENT

HEAT OF COMBUSTION

ASTM D240 IP 12 HEAT OF COMBUSTION OF LIQUID HYDROCARBON FUELS BY BOMB CALORIMETER

This test method covers the determination of the heat of combustion of liquid hydrocarbon fuels ranging in volatility from that of light distillates to that of residual fuels.

ASTM D4809 ASTM D2382 (obs) HEAT OF COMBUSTION OF LIQUID HYDROCARBON FUELS BY BOMB CALORIMETER (PRECISION METHOD)

This test method covers the determination of the heat of combustion of hydrocarbon fuels. It is designed specifically for use with aviation turbine fuels when the permissible difference between duplicate determinations is of the order of 0.2 %. It can be used for a wide range of volatile and nonvolatile materials where slightly greater differences in precision can be tolerated.

ASTM D5865 ASTM D3286 (obs) GROSS CALORIFIC VALUE OF COAL AND COKE

This test method pertains to the determination of the gross calorific value of coal and coke by either an isoperibol or adiabatic bomb calorimeter.

ISO 1716 REACTION TO FIRE TESTS FOR PRODUCTS -- DETERMINATION OF THE GROSS HEAT OF COMBUSTION (CALORIFIC VALUE)

Method for the determination of the gross heat of combustion of products at constant volume in a bomb calorimeter.

ASTM D129 IP 61 DIN 51577 SULFUR IN PETROLEUM PRODUCTS (GENERAL BOMB METHOD)

This test method covers the determination of sulfur in petroleum products, including lubricating oils containing additives, additive concentrates, and lubricating greases that cannot be burned completely in a wick lamp. The test method is applicable to any petroleum product sufficiently low in volatility that it can be weighed accurately in an open sample boat and containing at least 0.1% sulfur.

ASTM D808 CHLORINE IN NEW AND USED PETROLEUM PRODUCTS (BOMB METHOD)

This test method covers the determination of chlorine in lubricating oils and greases, including new and used lubricating oils and greases containing additives, and in additive concentrates. Its range of applicability is 0.1 to 50 m% chlorine.

Capacity 300ml, completely made of stainless steel included the two electrodes, cover with threaded displacing ring, gasket around the cover edge, an automatic inlet valve, a pin exhaust valve. Tested at 200 bar/20 MPa.

Technical specifications:

- Dimensions: Ø10x22 cm
- Weight: 4.5 kg

2060 CYLINDER MAHLER

Handle for extraction, 2 sectors polycarbonate cover with holes for the passing of stirrer, blade stirrer, motor stirrer 100 rpm 24V with support, double pliers for thermometer, connection for Mahler bomb electrodes. The vessel is fitted with ignition device including: low voltage outlet, start pushbutton, 24V socket for motor stirrer, ammeter.

Technical specifications:

- Power supply: 230V ±10% 50/60Hz
- Dimensions: 40x40x82 cm
- Weight: 29 kg

2070 CALORIMETER VESSEL

CONSUMABLES x 2 YEARS

10-2061/A	QUARTZ DISH Cap.3 ml
10-2067	BENZOIC ACID FOR PASTILS, pack of 100 g
10-2068	BENZOIC ACID PASTILS, pack of 10 pcs 1 g ±0.1
10-2071/A	IGNITION WIRE CHROMEL C, 5 m., pack of 10 pcs
10-2071/B	PLATINUM IGNITION WIRE, 10 cm.

SPARE PARTS

15-PINR1	PLIERS
15-2070/VAS	INTERNAL VESSEL
15-2070/COP	POLYCARBONATE COVER
15-0004	BIPOLAR GREEN SWITCH
15-0005	BIPOLAR YELLOW SWITCH
12-0010	MOTOR STIRRER 100 RPM 24V
15-0044	AMMETER 0-5A

ACCESSORIES ON REQUEST

2470/BCA200	ANALYTICAL BALANCE Range 220 g., readout 0.0001, pan Ø80
10-2061/A	QUARTZ CRUCIBLE Cap.3 ml.
10-2061/B	STAINLESS STEEL CRUCIBLE
10-2061/C	CRUCIBLE IP 12 made of stainless steel AISI 316 (25/20) without rim
10-2063	REDUCER GEAR For O ₂ , with pressure gauge, safety valve and junction Hy-Flex for high pressure L=150 cm 1/4"-3/8"
10-2064	SUPPORT FOR COVER
10-2065	PRESS FOR PASTILS
10-2067	BENZOIC ACID FOR PASTILS, pack of 100 g
10-2068	BENZOIC ACID PASTILS, pack of 10 pcs 1 g ±0.1
10-2074	SIEVE ASTM 70 mesh, Ø100 mm
10-2071/A	IGNITION WIRE CHROMEL C, 5 m., pack of 10 pcs
10-2071/B	PLATINUM IGNITION WIRE, 10 cm.
10-0332	DIGITAL STOPWATCH 7 digit LCD, max.10 hours, 1/100 sec, digit h=8 mm
T-AS116C	THERMOMETER ASTM 116C
T-AS117C	THERMOMETER ASTM 117C
T-AS56C	THERMOMETER 56C
T-BECK	BECKMANN THERMOMETER 6-6.5:0.01, UPPER PART 420 mm

For ASTM D129 D808 pair with 2060

2470/BCA200	ANALYTICAL BALANCE Range 220 g., readout 0.0001, pan Ø80
10-2062	IGNITION DEVICE
10-2061/D	PLATINUM CRUCIBLE
10-2063	REDUCER GEAR For O ₂ , with pressure gauge, safety valve and junction Hy-Flex for high pressure L=150 cm 1/4"-3/8"
10-2064	SUPPORT FOR COVER
10-2071/B	PLATINUM IGNITION WIRE, 10 cm.
10-2071/D	COTTON WIRE, pack of 3 mt.

EXTRACTION RESIDUES SEDIMENT



SULFUR - QUARTZ TUBE METHOD

ASTM D1551 (obs) IP 63 DIN 51768 SULFUR IN PETROLEUM OILS (QUARTZ-TUBE METHOD)

Procedure for the determination of sulfur in petroleum oils and related materials. The method is applicable to sulfur in concentrations ranging from 0.01 to 5.0%.

This two-place instrument is mounted on a plate painted with epoxy products and consists of an electric stainless steel furnace with two independent places, two digital thermoregulators with thermocouple, two scrubbers, a trap equipped with two inlet cocks for air or oxygen and two outlet cocks for combustion tubes made in transparent quartz.

The tubes are provided with tapered connections at the inlet side and spherical connections at the delivery side. Set of primary and secondary absorbers on support, vacuum collector with two regulating valves, two flow-off valves, two LPG Meker lamps, flame filter mesh for combustion tubes.

Technical specifications:

- Temperature: up to 1100°C (2012°F)
- Power supply: 230V ±10% 50/60Hz

1460 APPARATUS QUARTZ TUBE

ACCESSORIES ON REQUEST

- 10-1464 COMBUSTION BOAT, pack of 3 pcs
- 2460/SC5 VACUUM PUMP

CONSUMABLES x 2 YEARS

- 10-1464 COMBUSTION BOAT, pack of 3 pcs x2

SPARE PARTS

- 15-1461 QUARTZ TUBE
- 15-1462/A PRIMARY ABSORBER
- 15-1462/B SECONDARY ABSORBER
- 15-1463 SCRUBBER
- 15-1465 SPRAY TRAP
- 16-0005 DIGITAL THERMOREGULATOR
- 14-0003 THERMOCOUPLE K
- 15-0004 BIPOLEAR GREEN SWITCH



EXTRACTION RESIDUES SEDIMENT

SULFUR - LAMP METHOD

ASTM D1266 IP 107 SULFUR IN PETROLEUM PRODUCTS (LAMP METHOD)

This test method covers the determination of total sulfur in liquid petroleum products in concentrations from 0.01 to 0.4 mass%. A special sulfate analysis procedure is described in Annex A1 that permits the determination of sulfur in concentrations as low as 5 mg/kg.

Consisting of: structure made in plate painted with epoxy products, lamps, Pyrex regulators, a valve on the vacuum regulator, metallic collectors for the vacuum lines, glass burners, chimneys, gate valves for vacuum and gas, valves on the vacuum lines, valves on the burners line, valve on the chimney line, traps for the chimney line, flowmeter on the vacuum line, 25 ml flask, absorber U tube, spray trap.

1490/A/2 SULFUR - LAMP METHOD FOR AROMATICS (2 POSITIONS)

1490/L/2 SULFUR - LAMP METHOD FOR NONAROMATICS (2 POSITIONS)

Technical specifications:
 - Dimensions: 57x60x102 cm
 - Weight: 26 kg

1490/A/6 SULFUR - LAMP METHOD FOR AROMATICS (6 POSITIONS)

1490/L/6 SULFUR - LAMP METHOD FOR NONAROMATICS (6 POSITIONS)

Technical specifications:
 - Dimensions: 110x60x102 cm
 - Weight: 45 kg

ACCESSORIES ON REQUEST


10-1500	CO ₂ O ₂ APPARATUS (SECTION A) CO ₂ reducer for very low pressures distribution, direct connection to commercial cylinders, primary manometer 0-315 bar, secondary manometer double stage 0-2.5 bar. O ₂ reducer low pressures distribution, direct connection to commercial cylinders, primary manometer 0-315 bar, secondary manometer double stage 0-2.5 bar. Electric heater for CO ₂ connectable to commercial cylinders.
10-1510	CO ₂ O ₂ APPARATUS (SECTION B) Central station completes of electric safety device that operates in absence of CO ₂ , flowmeter for O ₂ and for CO ₂ with relative valves of regulation.
2460/SC5	VACUUM PUMP
10-1507	DRECHSEL

CONSUMABLES x 2 YEARS

15-1492/A	COTTON WICKING FOR AROMATICS SAMPLES, pack of 10 m. x2
15-1492/L	COTTON WICKING FOR NONAROMATICS SAMPLES, pack of 10 m. x2

SPARE PARTS

15-1491/A	FLASK FOR AROMATICS SAMPLES
15-1491/L	FLASK FOR NONAROMATICS SAMPLES
15-1493/A	BURNER FOR AROMATICS SAMPLES
15-1493/L	BURNER FOR NONAROMATICS SAMPLES
15-1494	CHIMNEY
15-1495	ABSORBER
15-1496	SPRAY TRAP
15-1497	SCRUBBER
15-1497/T	SCRUBBER ONLY STOPPER
15-1498	LEVEL FLASK

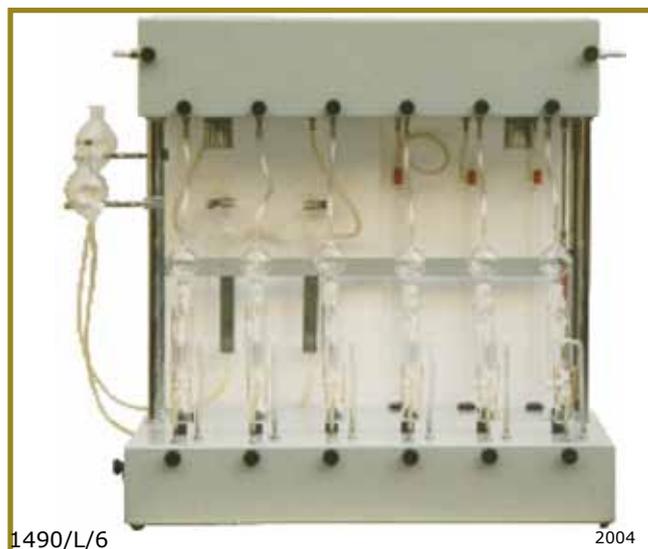

EXTRACTION RESIDUES SEDIMENT

CONTAMINATION

ASTM D5452 IP 423 PARTICULATE CONTAMINATION IN AVIATION FUELS BY LABORATORY FILTRATIONS

This test method covers the gravimetric determination by filtration of particulate contaminant in a sample of aviation turbine fuel delivered to a laboratory



Metallic structure conforming to method, metallic filter funnel supported by a base with support for closing of the tightness membrane, 5 litres filling container made in stainless steel with stopper for spillage, one receiving and one security 5 litres filtering flask. Connection flaske to flaske by vacuum tube nad the flask are provided with grounding system. Rubber stoppers and tubes for connection.

Technical specifications:

- Dimensions: 40x40x90 cm
- Weight: 13 kg

1550 PARTICULATE CONTAMINATION IN AVIATION FUELS

ACCESSORIES ON REQUEST

- | | |
|-------------|--|
| 2460/8103 | VACUUM PUMP |
| 10-1553 | MENBRANE FILTERS, pack of 100 pcs
Ø47 mm, 0.8 µm, cellulose acetate |
| 2470/BCA200 | ANALYTICAL BALANCE
Range 220 g., readout 0.0001, pan Ø80 |

CONSUMABLES x 2 YEARS

- | | |
|---------|--------------------------------------|
| 10-1553 | MENBRANE FILTERS, pack of 100 pcs x2 |
|---------|--------------------------------------|

SPARE PARTS

- | | |
|---------|---|
| 15-1551 | RECEIVING/SAFETY FLASK, 5 LITERS |
| 15-1552 | STAINLESS STEEL SAMPLE CONTAINER, 5 LITER |
| 15-1554 | METALLIC FILTER FUNNEL |
| 15-1555 | VACUUM HOSE, pack of 2 pcs |

IP 440 EN 12662 LIQUID PETROLEUM PRODUCTS - DETERMINATION OF CONTAMINATION IN MIDDLE DISTILLATES

For determining contamination as the content of undissolved substances in middle distillates containing up to 5% (V/V) fatty acid methyl esters (FAME) and in 100% (V/V) FAME. This method can be applied for contaminant content from 6 mg/kg to 30 mg/kg.

Consisting of: filtering apparatus with glass funnel 250 ml and flask 1000 ml., one pack of 100 pcs of membrane filter of cellulose nitrate Ø47 mm 0.8 µm.

1560 DETERMINATION OF CONTAMINATION IN MIDDLE DISTILLATES

ACCESSORIES ON REQUEST

- | | |
|-------------|---|
| 2460/8163 | VACUUM PUMP |
| 2470/BCA200 | ANALYTICAL BALANCE
Range 220 g., readout 0.0001, pan Ø80 |

CONSUMABLES x 2 YEARS

- | | |
|---------|--------------------------------------|
| 15-1563 | MENBRANE FILTERS, pack of 100 pcs x2 |
|---------|--------------------------------------|

ASTM D4176 FREE WATER AND PARTICULATE CONTAMINATION IN DISTILLATE FUELS

This test method covers two procedures for estimating the presence of suspended free water and solid particulate contamination in distillate fuels having distillation end points below 400°C and an ASTM color of 5 or less.

Beaker 1000 ml., high shape without spout, bar chart, haze rating chart.

1170 FREE WATER & PARTICULATE CONTAMINATION IN DISTILLATE FUELS

SPARE PARTS

- | | |
|---------|--------------------------------------|
| 15-1171 | BEAKER, 1000 ml |
| 15-1174 | DISTILLATE FUEL BAR CHART |
| 15-1175 | DISTILLATE FUEL HAZE RATING STANDARD |

ASTM D6468 HIGH TEMPERATURE STABILITY OF MIDDLE DISTILLATE FUELS

This test method covers relative stability of middle distillate fuels under high temperature aging conditions with limited air exposure.

Structure made of stainless steel, support for six aging tubes, temperature regulation by digital thermoregulator PID with PT100 probe class A and overtemperature alarm, stainless steel heater, cooling coil, motor stirrer, insulated double wall, safety internal level for low liquid with warning lamp.

Technical specifications:

- Temperature: from ambient to 150°C (302°F) ±0.1°C
- Bath capacity: 5 about liters
- Power supply: 230V ±10% 50/60Hz
- Power: 1200W
- Dimensions: 27x39x45 cm
- Weight: 8 kg

1180 BATH FOR HIGH TEMPERATURE STABILITY OF MD

SAMPLING

ASTM D270 (obs) D4057 IP 51 (obs) ISO 3170 DIN 51750 STANDARD PRACTICE FOR MANUAL SAMPLING OF PETROLEUM AND PETROLEUM PRODUCTS

All in brass, capacity 946 ml., Ø80 mm., total height 350 mm., cork stoppr with ring

Mde of brass, this item protects sampling glass bottles

1330/40 BRASS SAMPLING CANS 38

For heavy crude and heavy fuel oil, lubricating oils, heavy gas oils and non-transparent.
Opening Ø38 mm.

1330/20 BRASS SAMPLING CANS 19

For light crude oils, light lubricating oils, kerosene, gasoline, transparent gas oils.
Opening Ø19 mm.

All in stainless steel, capacity 946 ml., Ø80 mm., total height 350 mm., cork stoppr with ring

1335/40 STAINLESS STEEL SAMPLING CANS 38

For heavy crude and heavy fuel oil, lubricating oils, heavy gas oils and non-transparent.
Opening Ø38 mm.

1335/20 STAINLESS STEEL SAMPLING CANS 19

For light crude oils, light lubricating oils, kerosene, gasoline, transparent gas oils
Opening Ø19 mm.

1340 BACON SAMPLING VESSEL

Made of brass, capacity 1 l, Ø80 mm, total height 250 mm, weight 1750 g, bottom opening valve

710 ml overall capacity, 102 cm height , Ø3.2 cm

1350/O BRASS SAMPLING TUBE

1350/A STAINLESS STEEL SAMPLING TUBE

1390/700 WINDER, 700 g

Made in steel, support strut and carrying handle, fitted with stopping system. 30 m length, 700 g. brass counterweight that is millimeter graduated for measuring light products.

1390/1200 WINDER, 1200 g

Made in steel, support strut and carrying handle, fitted with stopping system. 30 m length, 1200 g. brass counterweight that is millimeter graduated for measuring light products.

1410 RED PASTE, pack of 10 pcs

To detect the height of water that is deposited on the bottom of the tanks of petroleum products

1420 GASOLINE PAPER, pack of 200 papers

Point out, with a test to the stain, the presence of oil in the gasoline

1430 LEVEL PASTE, pack of 10 pcs

50 g
To detect the level of liquids in tanks

1360 SAMPLING CAGE FOR SAMPLING BOTTLE

ACCESSORI ON REQUEST

- 10-1365/C CLEAR GLASS SAMPLING BOTTLE
Capacity 1 l, equipped with cork with ring.
- 10-1365/S DARK GLASS SAMPLING BOTTLE
Capacity 1 l, equipped with cork with ring.
- 10-1421 BRASS CHAIN, 5 m
- T-AS58C THERMOMETER ASTM 58C
- T-AS59C THERMOMETER ASTM 59C
- T-AS60C THERMOMETER ASTM 60C
- T-IP48C THERMOMETER IP 48C
- T-IP49C THERMOMETER IP 49C
- T-IP50C THERMOMETER IP 50C
- T-IP51C THERMOMETER IP 51C
- T-IP52C THERMOMETER IP 52C
- T-IP53C THERMOMETER IP 53C



SAMPLING

SAMPLING CYLINDER

ASTM D 1265 GPA 2140 SAMPLING LIQUEFIED PETROLEUM (LP) GASES, MANUAL METHOD

Produced from cold drawn AISI 316L stainless steel tube and seamless construction, 1/4" gas tapered connection and 1/4" gas charge, fitted with 2 stainless steel AISI 316 valves and a 20% outage tube. 124 bar/1800 PSI pressure certificate.

- 1630/50 SAMPLING CYLINDER 50 ML**
- 1630/75 SAMPLING CYLINDER 75 ML**
- 1630/150 SAMPLING CYLINDER 150 ML**
- 1630/300 SAMPLING CYLINDER 300 ML**
- 1630/400 SAMPLING CYLINDER 400 ML**
- 1630/500 SAMPLING CYLINDER 500 ML**
- 1630/1000 SAMPLING CYLINDER 1000 ML**
- 1630/2250 SAMPLING CYLINDER 2250 ML**

ACCESSORIES ON REQUEST

- 10-1631 HANDLE
For transport
- 10-1635 PROTECTION COLLAR
Prevents damage to valves and cylinder
- 10-1670 CONNECTOR FILTER
This item is to be connected to the cylinders. Its body is of brass and has a filtering Perlon mass with 1/4" connections.
- 10-1680 CONNECTOR PIPE
With two valves and connection

SPARE PARTS

- 15-1820 NEEDLE VALVE
Made of stainless steel AISI 316, 1/4" - 1/4"

CORROSION

COPPER AND SILVER CORROSION

ASTM D130 IP 154 ISO 2160 ISO 22160 DIN 51759 CORROSIVENESS TO COPPER FROM PETROLEUM PRODUCTS BY COPPER STRIP TEST

This test method covers the determination of the corrosiveness to copper of aviation gasoline, aviation turbine fuel, automotive gasoline, cleaners (Stoddard) solvent, kerosine, diesel fuel, distillate fuel oil, lubricating oil, and natural gasoline or other hydrocarbons having a vapor pressure no greater than 124 kPa (18 psi) at 37.8°C (100°F)

ASTM D4048 IP 112 DETECTION OF COPPER CORROSION FROM LUBRICATING GREASE

ASTM D4814 AUTOMOTIVE SPARK-IGNITION ENGINE FUEL

ASTM D7667 DETERMINATION OF CORROSIVENESS TO SILVER BY AUTOMOTIVE SPARK-IGNITION ENGINE FUEL—THIN SILVER STRIP METHOD

This test method covers the determination of the corrosiveness to silver by automotive spark-ignition engine fuel (for example, gasoline), as defined by Specification D4814 or similar specifications in other jurisdictions, having a vapor pressure no greater than 124 kPa (18 psi) at 37.8°C (100°F) by one of two procedures.

ASTM D7671 CORROSIVENESS TO SILVER BY AUTOMOTIVE SPARK-IGNITION ENGINE FUEL—SILVER STRIP METHOD

This test method covers the determination of the corrosiveness to silver by automotive spark-ignition engine fuel, as defined by Specification D4814, or similar specifications in other jurisdictions, having a vapor pressure no greater than 124 kPa (18 psi) at 37.8°C (100°F), by one of two procedures. Procedure A involves the use of a pressure vessel, whereas Procedure B involves the use of a vented test tube.

IP 227 (obs) SILVER CORROSION AVIATION TURBINE FUELS

This test method describes a procedure for the detection of corrosiveness of aviation turbine fuels towards silver

Fully made in stainless steel, this bath has a capacity of about 13 liters for 4 copper corrosion test vessel. The temperature control is a thermoregulator PID with PT100 probe class A and overtemperature alarm, stainless steel heater, cooling coil, motor stirrer, insulated double wall, safety internal level for low liquid with warning lamp. The bath includes a cover with 4 lids and hooks for suspending the corrosion test vessel.

Technical specifications:

- Temperature: from ambient to 150°C (302°F)
- Stability: $\pm 0.1^\circ$
- Capacity: about 13 liters
- Power supply: 230V $\pm 10\%$ 50/60Hz
- Power: 1200W
- Dimensions: 30x49x50 cm
- Weight: 10 kg

1440 "COPPER/SILVER" CORROSION BATH



1440

2016

CORROSION

ACCESSORIES ON REQUEST

For ASTM D130

10-1441/B	CORROSION VESSEL Made of stainless steel, supplied with testing certificate at 145 psi (10 bar)
10-1441/D	TEST TUBE, pack of 10 pcs Made of glass, Ø25x150 mm
10-1441/T	TEST TUBE HOLDER Made of brass nickel-plated
10-1441/E	RACK FOR 8 TEST TUBES
10-1441/F	VIEWING TEST TUBE For holding tarnished copper strips for inspection or for storage
10-1441/G	COPPER STRIPS, pack of 10 pcs 75x12.5x2 mm.
10-1441/I	3 POSITIONS POLISHING VISE
10-1441/M	COPPER STRIP CORROSION STANDARD
10-1441/O	SILICON CARBIDE GRAIN 150 MESH, pack of 1 kg
10-1441/S	SILICONE CARBIDE PAPER 220 GRIT, pack of 50 pcs
10-0332	DIGITAL STOPWATCH 7 digit LCD, max.10 hours, 1/100 sec, digit h=8 mm
T-AS12C	THERMOMETER ASTM 12C IP 64C

For ASTM D7667

10-1441/B	CORROSION VESSEL Made of stainless steel, supplied with testing certificate at 145 psi (10 bar)
10-1441/D	TEST TUBE, pack of 10 pcs Made of glass, Ø25x150 mm
10-1441/E	RACK FOR 8 TEST TUBES
10-1441/R	SILVER STRIPS, pack of 5 pcs 38x6.30x0.53 mm, 99.9%
10-0332	DIGITAL STOPWATCH 7 digit LCD, max.10 hours, 1/100 sec, digit h=8 mm
T-AS12C	THERMOMETER ASTM 12C IP 64C

For ASTM D7671

10-1441/B	CORROSION VESSEL Made of stainless steel, supplied with testing certificate at 145 psi (10 bar)
10-1441/D	TEST TUBE, pack of 10 pcs Made of glass, Ø25x150 mm
10-1441/E	RACK FOR 8 TEST TUBES
10-1442/A	SILVER STRIPS, pack of 5 pcs 19x12.7x2.5 mm., 99.9%
10-1442/E	SILVER STRIP SUSPENSION ASSEMBLY PROCEDURE "A"
10-1441/F	VIEWING TEST TUBE For holding tarnished copper strips for inspection or for storage
10-1441/I	3 POSITIONS POLISHING VISE
10-1442/D	SILVER STRIP CORROSION STANDARD ASTM D1660 D3241 IP 323
10-0332	DIGITAL STOPWATCH 7 digit LCD, max.10 hours, 1/100 sec, digit h=8 mm
T-AS12C	THERMOMETER ASTM 12C IP 64C

For IP 227 ASTM D4814

10-1442/A	SILVER STRIPS, pack of 5 pcs 19x12.7x2.5 mm.
10-1442/B	GLASSWARE Test tube 350 ml made of heat resistant amber glass, cold finger condenser fitted trough a stopper with a glass hook from which the silver strip can be suspended, glass cradle for suspension of the silver strip
10-1442/C	SUSPENSION COVER Made of stainless steel, 6 positions with spring clip
10-1442/D	SILVER STRIP CORROSION STANDARD ASTM D1660 D3241 IP 323

CONSUMABLES x 2 YEARS

10-1441/G	COPPER STRIPS, pack of 10 pcs x5
10-1441/R	SILVER STRIPS, pack of 5 pcs x5
10-1441/O	SILICON CARBIDE GRAIN 150 MESH, x2 pack of 1 kg
10-1441/S	SILICONE CARBIDE PAPER 220 GRIT, x4 pack of 50 pcs
15-1441/R	O-RING, pack of 10 pcs x1

SPARE PARTS

15-1441/A	SUPPORT FOR CORROSION VESSEL For 4
15-1442/BT	AMBER TEST TUBE, 350 ml
15-1442/BS	CONDENSER STOPPER
15-1442/BC	CRADLE
14-0001	PROBE PT100A
11-0012/19	HEATER
16-0005	DIGITAL THERMOREGULATOR
15-0015	STATIC RELAY
15-0004	BIPOLAR GREEN SWITCH
12-0001	MOTOR STIRRER

CORROSION

HYDROCARBONS CORROSION

ASTM D849 COPPER STRIP CORROSION BY INDUSTRIAL AROMATIC HYDROCARBONS

Structure made of stainless steel, bath with capacity of about 26 liters. Temperature regulation by digital thermoregulator PID with PT100 probe class A and overtemperature alarm, stainless steel heater, cooling coil, motor stirrer, insulated double wall, external level indicator and safety internal level for low liquid with warning lamp.

Technical specifications:

- Temperature: from ambient to 150°C (302°F)
- Stability: $\pm 0.1^\circ\text{C}$
- Power supply: 230V $\pm 10\%$ 50/60Hz
- Power: 1200W

1450 COPPER CORROSION BATH OF INDUSTRIAL AROMATIC HYDROCARBONS (2 POSITIONS)

- Capacity: about 18 liters
- Dimensions: 45x30x56 cm
- Weight: 17 kg

1450/4 COPPER CORROSION BATH OF INDUSTRIAL AROMATIC HYDROCARBONS (4 POSITIONS)

- Capacity: about 26 liters
- Dimensions: 45x40x56 cm
- Weight: 21 kg

ACCESSORIES ON REQUEST

10-1452	250 ml FLASK
10-1453	250 mm CONDENSER
10-1454	COPPER WIRE $\varnothing 1.6$ mm x 1 m.
10-1441/F	VIEWING TEST TUBE For holding tarnished copper strips for inspection or for storage
10-1441/G	COPPER STRIPS, pack of 10 pcs 75x12.5x2 mm.
10-1441/I	3 POSITIONS POLISHING VISE
10-1441/L	SILICON CARBIDE PAPER 240 GRIT, conf.50 pz.
10-1441/M	COPPER STRIP CORROSION STANDARD
10-1441/O	SILICON CARBIDE GRAIN 150 MESH, conf.1 kg
T-AS12C	THERMOMETER ASTM 12C IP 64C

CONSUMABLES x 2 YEARS

10-1454	COPPER WIRE $\varnothing 1.6$ mm x 1 m. x4
10-1441/G	COPPER STRIPS, pack of 10 pcs x4
10-1441/L	SILICON CARBIDE PAPER 240 GRIT, pack of 50 pcs x4
10-1441/O	SILICON CARBIDE GRAIN 150 MESH, pack of 1 kg x2

SPARE PARTS

14-0001	PROBE PT100A, L=200
11-0012/19	HEATER
16-0005	DIGITAL THERMOREGULATOR
15-0015	STATIC RELAY
15-0004	BIPOLAR GREEN SWITCH
12-0001	MOTOR STIRRER

1450/4 + 10-1452 + 10-1453

2011



CORROSION

LPG CORROSION

ASTM D1838 IP 411 ISO 6251 COPPER STRIP CORROSION BY LIQUEFIED PETROLEUM (LP) GASES

This test method covers the detection of the presence of components in liquefied petroleum gases which can be corrosive to copper

Stainless steel vessel with two needle valves in stainless steel. Screwtop closure and O-ring sealing gasket. Tested at 1015 psi (70 bar)

1690 LPG CORROSION VESSEL

CONSUMABLES x 2 YEARS

10-1692 COPPER STRIPS, pack of 10 pcs x4
 10-1441/L SILICON CARBIDE PAPER 240 GRIT, pack of 50 pcs
 10-1441/O SILICON CARBIDE GRAIN 150 MESH, conf.1 kg
 15-1691 GASKET, pack of 10 pcs x1



ACCESSORIES ON REQUEST

1770 THERMOSTATIC BATH
 Stainless steel structure, capacity 90 liters about, insulated interspace. The temperature control is a thermoregulator PID with PT100 probe class A and overtemperature alarm, stainless steel heater, cooling coil, motor stirrer, insulated double wall, safety internal level for low liquid with warning lamp. Allows the immersion of 6 cylinders RVP, 6 cylinders corrosion or hydrometers 2, 6 cylinders Reid
 Technical specifications:
 - Temperature: from ambient to 90°C (194°F) ±0.1°C
 - Bath capacity: 90 liters about
 - Power supply: 230V ±10% 50/60Hz
 - Power: 3200W
 - Dimensions: 54x50x89 cm.
 - Weight: 39 kg.

10-1692 COPPER STRIPS, pack of 10 pcs
 75x12.5x2mm, with hole

10-1441/F VIEWING TEST TUBE
 For holding tarnished copper strips for inspection or for storage

10-1441/L SILICON CARBIDE PAPER 240 GRIT, pack of 50 pcs

10-1441/O SILICON CARBIDE GRAIN 150 MESH, conf.1 kg

10-1441/I 3 POSITIONS POLISHING VISE

10-1441/M COPPER STRIP CORROSION STANDARD

T-AS12C THERMOMETER ASTM 12C IP 64C



CAST IRON CORROSION

IP 125 DIN 51360-1 DETERMINATION OF CAST IRON CORROSION CHARACTERISTICS OF PETROLEUM PRODUCTS

100x100x6 mm thick cast-iron plate, 250 g 6x1.5-3 mm steel millings, desiccator test chamber, pipette, sieve 600 µm

2210/125 CAST IRON CORROSION

CONSUMABLES x 2 YEARS

15-2211 CAST IRON PLATE x1
 100x100x6 mm.
 15-2212 STEEL MILLINGS, pack of 250 g. x2

IP 287 DIN 51360-2 TESTING OF COOLING LUBRICANTS; DETERMINATION OF CORROSION PREVENTING CHARACTERISTICS OF COOLING LUBRICANTS MIXED WITH WATER; CHIP/FILTER PAPER METHOD

2 liters beaker, 120x19x1.5 mm stainless steel stirrer palette, 250 g. cast iron drillings, 50 ml syringe with needle, 70 mm filter with 40 mm centering ring, sieves: one 2 mm and one 4 mm

2210/287 CAST IRON CORROSION

CONSUMABLES x 2 YEARS

15-2215 CAST IRON DRILLING, conf.250 g. x2

SPARE PARTS

15-2216 SYRINGE, 50 ML
 15-2216/A NEEDLE
 15-2217 PALETTE

CORROSION

CORROSION OF CAST ALUMINUM ALLOYS

ASTM D4340 CORROSION OF CAST ALUMINUM ALLOYS IN ENGINE COOLANTS UNDER HEAT-REJECTING CONDITIONS

Apparatus composed of gearcase with electrical part thermoregulator a with thermocouple J and digital timer Safety screen surrounding cell, truss with plates and stainless steel tie rods at the center, which is placed in a Pyrex glass tube, with related fittings, safety valve, pressure manometer 0-400 KPa, tap and plug load, 950W heater.

Technical specifications:

- Temperature: from ambient to 160°C (320°F)
- Stability: $\pm 0.5^\circ\text{C}$
- Power supply: 230V $\pm 10\%$ 50/60Hz

2220 CORROSION CAST ALLUMINUM ALLOYS APPARATUS

- Power: 950W
- Dimensions: 26x34x110 cm
- Weight: 18 kg

2220/2 CORROSION CAST ALLUMINUM ALLOYS APPARATUS (2 POSITIONS)

Technical specifications:

- Power: 1900W
- Dimensions: 35x43x118 cm
- Weight: 35 kg

ACCESSORIES ON REQUEST

10-2221	ALUMINUM TEST SPECIMEN $\varnothing 6.5 \times 1.3$ cm
2460/2220	PUMP

CONSUMABLES x 2 YEARS

10-2221	ALUMINUM TEST SPECIMEN x2
15-2221	VITON GASKET, pack of 10 pcs x5

SPARE PARTS

15-2220	PYREX TUBE
15-2222	PRESSURE GAUGE 0-400 KPa
14-0004	THERMOCOUPLE J
11-2220	HEATER
16-0005	DIGITAL THERMOREGULATOR
16-0080	TIMER DIGITALE
15-0015	STATIC RELAY
15-0004	BIPOLAR GREEN SWITCH
15-0005	BIPOLAR YELLOW SWITCH



CORROSION

CORROSION ENGINE COOLANTS

ASTM D1384 CORROSION TEST FOR ENGINE COOLANTS IN GLASSWARE

This test method covers a simple beaker-type procedure for evaluating the effects of engine coolants on metal specimens under controlled laboratory conditions

Thermoregulated electric-plate heater, 1-liter beakers fitted with a rubber stopper, condenser, tube for air diffusion, flowmeter system complete with flowmeter 6 l/h air flow with pin valves and internal pump, clamp to support the glassware.

Technical specifications:

- Temperature: from ambient to 160°C (320°F)
- Stability: $\pm 1^\circ\text{C}$
- Power supply: 230V $\pm 10\%$ 50/60Hz

2330 CORROSION TESTER FOR ENGINE ANTIFREEZE

- Power: 700W
- Dimensions: 25x150 cm
- Weight: 6 kg

2330/4 CORROSION TESTER FOR ENGINE ANTIFREEZE (4 POSITIONS)

System at 4 independent positions

- Power: 2400W
- Dimensions: 75x25x150 cm
- Weight: 15 kg

ACCESSORIES ON REQUEST

10-2330	METAL TEST SPECIMENS SET Material: copper, solder, brass, steel, cast iron, cast aluminum
10-2331	DEWAR WITH TRAP For 2330
10-2331/4	DEWAR WITH 4 TRAP For 2330/4
T-AS1C	THERMOMETER ASTM 1C

CONSUMABLES x 2 YEARS

10-2330	METAL TEST SPECIMENS SET x2
---------	-----------------------------

SPARE PARTS

15-2331	CONDENSER
15-2331/T	RUBBER STOPPER
15-2332	AIR DIFFUSION TUBE
15-2333	TRAP
11-0022	HEATER
15-0110	ELECTRONIC REGULATOR
15-0015	STATIC RELAY
15-0004	BIPOLAR GREEN SWITCH



OXIDATION

OXIDATION STABILITY - TOST

ASTM D943 ISO 4263 DIN 51587 OXIDATION CHARACTERISTICS OF INHIBITED MINERAL OILS

This test method covers the evaluation of the oxidation stability of inhibited steam-turbine oils in the presence of oxygen, water, and copper and iron metals at an elevated temperature. This test method is limited to a maximum testing time of 10 000 h. This test method is also used for testing other oils, such as hydraulic oils and circulating oils having a specific gravity less than that of water and containing rust and oxidation inhibitors.

ASTM D2274 IP 388 OXIDATION STABILITY OF DISTILLATE FUEL OIL (ACCELERATED METHOD)

This test method covers the measurement of the inherent stability of middle distillate petroleum fuels under specified oxidizing conditions at 95°C (203°F)

ASTM D2893 OXIDATION CHARACTERISTICS OF EXTREME-PRESSURE LUBRICATION OILS

These test methods (a and b) cover the determination of the oxidation characteristics of extreme-pressure fluid lubricants, gear oils, or mineral oils.

ASTM D4310 IP 157 DETERMINATION OF SLUDGING AND CORROSION TENDENCIES OF INHIBITED MINERAL OILS

This test method covers and is used to evaluate the tendency of inhibited mineral oil based steam turbine lubricants and mineral oil based anti-wear hydraulic oils to corrode copper catalyst metal and to form sludge during oxidation in the presence of oxygen, water, and copper and iron metals at an elevated temperature. The test method is also used for testing circulating oils having a specific gravity less than that of water and containing rust and oxidation inhibitors.

ASTM D7462 IP 388 ISO 12205 OXIDATION STABILITY OF BIODIESEL (B100) AND BLENDS OF BIODIESEL WITH MIDDLE DISTILLATE PETROLEUM FUEL (ACCELERATED METHOD)

This test method covers a measurement of the oxidation stability of biodiesel (B100) blendstock as specified in Specification D6751 and blends of biodiesel with middle distillate petroleum fuels, including B6 to B20 blends as specified in Specification D7467 under specified oxidizing conditions at 95°C (203°F). Specifically, the oxidation stability is assessed by the formation and measurement of insoluble degradation materials.

6-places stainless steel, insulated double wall, double bottom for supporting the cells, a 6-place refrigerating system with pipelines for water inlet and outlet. The temperature control is a thermoregulator PID with PT100 probe class A and overtemperature alarm, stainless steel heater, cooling coil, motor stirrer, insulated double wall, safety internal level for low liquid with warning lamp.

Technical specifications:

- Temperature: from ambient to 130°C (266°F)
- Stability: $\pm 0.1^\circ\text{C}$
- Power supply: 230V $\pm 10\%$ 50/60Hz
- Power: 2200W
- Capacity: 55 liters
- Dimensions: 57x47x73cm
- Weight: 32Kg

1920 OXIDATION STABILITY BATH

1920/S/4 OXIDATION STABILITY DRY BATH (4 POSITIONS)

Aluminum block, 4 positions

Technical specifications:

- Temperature: from ambient to 130°C (266°F)
- Stability: $\pm 0.1^\circ\text{C}$
- Power supply: 230V $\pm 10\%$ 50/60Hz
- Power 2100W
- Dimensions: 51x55x66 cm
- Weight: 77 kg

1920/S/8 OXIDATION STABILITY DRY BATH (8 POSITIONS)

Aluminum block, 8 positions

Technical specifications:

- Temperature: from ambient to 130°C (266°F)
- Stability: $\pm 0.1^\circ\text{C}$
- Power supply: 230V $\pm 10\%$ 50/60Hz



OXIDATION

ACCESSORIES ON REQUEST

For ASTM D943

10-1983	FLOWMETER 0.6-4 l/h For oxygen at 3 l/h
10-1921	OXIDATION CELL Consisting of a test tube, condenser and oxygen delivery tube
10-1922	COPPER/STEEL CATALYST WIRES, L=3 m pack of 5 pcs
10-1922/CU	COPPER CATALYST WIRES, L=3 m, pack of 5 pcs
10-1922/SS	STEEL CATALYST WIRES, L=3 m, pack of 5 pcs
10-1923	OXIDATION CELL THERMOMETER BRACKET
10-1924/10	SYRINGE LUER-LOCK 10 ml. with needle L=560 mm, for sample
10-1924/50	SYRINGE LUER-LOCK 50 ml. with needle L=560 mm, for water
10-1925	SAMPLING TUBE SPACER Made of plastic, Ø3x50 mm
10-1926	SAMPLING TUBE HOLDER Made of PMMA, Ø38x76 mm
10-1927	MANDREL For winding catalyst coils
10-1928	REDUCER MANOMETER FOR O ₂ Cylinder fitting
10-1929	REDUCER MANOMETER FOR AIR Cylinder fitting
10-1441/P	SILICONE CARBIDE CLOTH 100 GRIT, pack of 25 m
10-0371/20	SILICONE OIL 20 cSt, pack of 25 kg For temperature from ambient to 120°C (248°F)
T-AS40C	THERMOMETER ASTM 40 IP 70C
T-AS137C	THERMOMETER ASTM 137C For oxidation cell

For ASTM D2274 IP 388

10-1983	FLOWMETER 0.6-4 l/h For oxygen at 3 l/h
10-1921	OXIDATION CELL Consisting of a test tube, condenser and oxygen delivery tube
10-1921/SUP	DARKENED OXIDATION TEST TUBE RACK 8 positions, made of black painted metallic structure with cover and ventilation
15-1560/F	FILTER ASSEMBLY With clamp
10-1560/2274	MEMBRANE FILTERS, pack of 100 pcs Ø47 mm., 0.8 µm, cellulose ester
15-1561/500	FILTERING FLASK, 500 ml
10-1560/2274/2	MATCHED WEIGHT PAIR FILTERS, pack of 50 pcs Ø47 mm., 0.8 µm, miste ester
10-1174/200	BEAKER, 200 ml Tall style
10-0371/20	SILICONE OIL 20 cSt pack of 25 kg For temperature from ambient to 120°C (248°F)
2460/8163	VACUUM PUMP
1280/S6	ELECTRICAL HEATER DEVICE
2470/BCA200	ANALYTICAL BALANCE Range 220 g., readout 0.0001, pan Ø80
T-AS40C	THERMOMETER ASTM 40 IP 70C

For ASTM D2893

10-1920/2893	FLOWMETER AIR 10 l/h
15-1921/T	TEST TUBE
10-1921/BA	AIR DELIVERY TUBE
T-AS40C	THERMOMETER ASTM 40C

For ASTM D4310

10-1983	FLOWMETER 0.6-4 l/h For oxygen at 3 l/h
10-1921	OXIDATION CELL Consisting of a test tube, condenser and oxygen delivery tube
10-1922	COPPER/STEEL CATALYST WIRES, L=3 m pack of 5 pcs
10-1922/CU	COPPER CATALYST WIRES, L=3 m, pack of 5 pcs
10-1922/SS	STEEL CATALYST WIRES, L=3 m, pack of 5 pcs
15-1560/F	FILTER ASSEMBLY

With clamp

10-1560/4310	MEMBRANE FILTERS, pack of 100 pcs Ø47 mm., 5 µm, miste ester, white, plain
15-1561/1000	FILTERING FLASK, 1000 ml
10-1923	OXIDATION CELL THERMOMETER BRACKET
10-1924/50	SYRINGE LUER-LOCK 50 ml. with needle L=560 mm, for water
10-1927	MANDREL For winding catalyst coils
10-1928	REDUCER MANOMETER FOR O ₂ Primary 0-250 bar, reducer 0-1 bar
10-1929	REDUCER MANOMETER FOR AIR Primary 0-250 bar, reducer 0-1 bar
10-1441/P	SILICONE CARBIDE CLOTH 100 GRIT, pack of 25 m
10-0371/20	SILICONE OIL 20 cSt pack of 25 kg For temperature from ambient to 120°C (248°F)
2460/8163	VACUUM PUMP
T-AS40C	THERMOMETER ASTM 40 IP 70C
T-AS137C	THERMOMETER ASTM 137C For oxidation cell

For ASTM D7462

10-1983	FLOWMETER 0.6-4 l/h For oxygen at 3 l/h
10-1921	OXIDATION CELL Consisting of a test tube, condenser and oxygen delivery tube
10-1921/SUP	DARKENED OXIDATION TEST TUBE RACK 8 positions, made of black painted metallic structure with cover and ventilation
15-1560/F	FILTER ASSEMBLY With clamp
10-1560/7462	MEMBRANE FILTERS, pack of 100 pcs Ø47 mm., 0.7 µm
15-1561/500	FILTERING FLASK, 500 ml
10-1174/200	BEAKER, 200 ml Tall style
10-0371/20	SILICONE OIL 20 cSt pack of 25 kg For temperature from ambient to 120°C (248°F)
2460/8163	VACUUM PUMP
1280/S6	ELECTRICAL HEATER DEVICE
2470/BCA200	ANALYTICAL BALANCE Range 220 g., readout 0.0001, pan Ø80
T-AS40C	THERMOMETER ASTM 40 IP 70C

For ISO 12205

10-1560/12205	MEMBRANE FILTERS, pack of 100 pcs Ø47 mm., 0.8 µm, nylon
---------------	---

CONSUMABLES x 2 YEARS

10-1922	COPPER/STEEL CATALYST WIRES, L=3 m pack of 5 pcs x4
10-1922/CU	COPPER CATALYST WIRES, L=3 m, pack of 5 pcs x4
10-1922/SS	STEEL CATALYST WIRES, L=3 m, pack of 5 pcs x4
10-1441/P	SILICONE CARBIDE CLOTH 100 GRIT, pack of 25 pcs x2
10-1560/2274	MEMBRANE FILTERS, pack of 100 pcs x4
10-1560/2274/2	MATCHED WEIGHT PAIR FILTERS, pack of 50 pc x8
10-1560/4310	MEMBRANE FILTERS, pack of 100 pcs x4
10-1560/7462	MEMBRANE FILTERS, pack of 100 pcs x4
10-1560/12206	MEMBRANE FILTERS, pack of 100 pcs x4
15-1924/A	SYRINGE SAMPLING TUBE, pack of 6 pcs Made of stainless steel, L=560 mm

SPARE PARTS

15-1921/B	OXYGEN DELIVERY TUBE
15-1921/F	MUSHROOMCONDENSER
15-1921/T	TEST TUBE
14-0002	PROBE PT100A
11-0012/13	HEATER 2200W (for oil bath)
11-1920	HEATER (for dry bath)
16-0005	DIGITAL THERMOREGULATOR
15-0015	STATIC RELAY
15-0004	BIPOLAR GREEN SWITCH
12-0001	MOTOR STIRRER

OXIDATION

OXIDATION STABILITY - RPVOT (RBOT)/TFOUT

ASTM D2112 OXIDATION STABILITY OF INHIBITED MINERAL INSULATING OIL BY PRESSURE VESSEL

This test method covers and is intended as a rapid method for the evaluation of the oxidation stability of new mineral insulating oils containing a synthetic oxidation inhibitor. This test is considered of value in checking the oxidation stability of new mineral insulating oils containing 2,6-ditertiary-butyl para-cresol or 2,6-ditertiary-butyl phenol, or both, in order to control the continuity of this property from shipment to shipment. The applicability of this procedure for use with inhibited mineral insulating oils of more than 12 cSt at 40°C (104°F) (approximately 65 SUS at 100F) has not been established.

ASTM D2272 OXIDATION STABILITY OF STEAM TURBINE OILS BY ROTATING PRESSURE VESSEL

This test method utilizes an oxygen-pressured vessel to evaluate the oxidation stability of new and in-service turbine oils having the same composition (base stock and additives) in the presence of water and a copper catalyst coil at 150°C (302°F)

ASTM D4742 OXIDATION STABILITY OF GASOLINE AUTOMOTIVE ENGINE OILS BY THIN-FILM OXYGEN UPTAKE (TFOUT)

This test method evaluates the oxidation stability of engine oils for gasoline automotive engines. This test, run at 160°C (320°F), utilizes a high pressure reactor pressurized with oxygen along with a metal catalyst package, a fuel catalyst, and water in a partial simulation of the conditions to which an oil may be subjected in a gasoline combustion engine. This test method can be used for engine oils with viscosity in the range from 4 mm²/s (cSt) to 21 mm²/s (cSt) at 100°C (212°F), including re-refined oils

ASTM D7098 OXIDATION STABILITY OF LUBRICANTS BY THIN-FILM OXYGEN UPTAKE (TFOUT) CATALYST B

IP 229 DETERMINATION OF THE RELATIVE OXIDATION STABILITY BY ROTATING BOMB OF MINERAL TURBINE OIL

This standard specifies a method for the estimation of the oxidation stability of unused turbine oils having the same composition (base stock and additives) and for controlling the continuity of this property from batch to batch

Available in two versions both two positions, bench version and floor version.

External frame painted with epoxy acid-proof stainless steel tank stainless 70 liters about where the oxidation vessels are turned at 100rpm with a 30° angle according to ASTM specifications.

The temperature control is a thermoregulator PID with PT100 probe class A and overtemperature alarm, stainless steel heater, cooling coil, motor stirrer, insulated double wall, safety internal level for low liquid with warning lamp.

Technical specifications:

- Temperature: from ambient to 180°C (356°F)
- Stability: ±0.1°C
- Capacity: 70 liters about
- Power supply: 230V ±10% 50Hz
- Power: 3200W

1970/B RPVOT BATH (RBOT)/TFOUT

Bench model

Technical specifications:

- Dimensions: 90x60x70 cm
- Weight: 85 kg

1970/P RPVOT BATH (RBOT)/TFOUT

Floor model

Technical specifications:

- Dimensions: 90x60x120 cm
- Weight: 105 kg



1970/B + 10-MANDIG/30

2014

OXIDATION

ACCESSORIES ON REQUEST

For ASTM D2112

10-1971	OXIDATION VESSEL RPVOT (RBOT)/TFOUT Made of stainless steel AISI 316L. Complete of a lid, cap, stem and needle valve ¼". Tested at 100 bar / 1450 psi @25°C
10-1973/A	RECORDING MANOMETER Chart, 0-200 psi
10-MANDIG/30	DIGITAL MANOMETER 30 bar / 435 psi / 3000 kPa, data logger, RS232C
10-MANDIG/30/C	CERTIFICATE DIGITAL MANOMETER 30 bar / 435 psi / 3000 kPa, data logger, RS232C
10-1974/A	SAMPLE CONTAINER Made of glass, 175 ml, for copper catalyst
10-1974/C	GLASS COVER Ø50.8 mm.
10-1922/CU	COPPER CATALYST, pack of 5 pcs L=3 m.
10-1441/P	SILICON CARBIDE ABRASIVE CLOTH 100 GRIT, pack of 25 m
10-0371/50	SILICONE OIL 50 cSt, pack of 25 kg For temperature from 100°C (212°F) to 200°C (392°F)
2470/EL200	ELECTRONIC BALANCE Range 200 g, readout 0.01, pan Ø130
T-AS96C	THERMOMETER ASTM 96C

For ASTM D2272

10-1971	OXIDATION VESSEL RPVOT (RBOT)/TFOUT Made of stainless steel AISI 316L. Complete of a lid, cap, stem and needle valve ¼". Tested at 100 bar / 1450 psi @25°C
10-1973/A	RECORDING MANOMETER Chart, 0-200 psi
10-MANDIG/30	DIGITAL MANOMETER 30 bar / 435 psi / 3000 kPa, data logger, RS232C
10-MANDIG/30/C	CERTIFICATE DIGITAL MANOMETER 30 bar / 435 psi / 3000 kPa, data logger, RS232C
10-1974/A	SAMPLE CONTAINER Made of glass, 175 ml, for copper catalyst
10-1974/B	PTFE DISK Ø57.2x1.6 mm., with 4 holes Ø3.2 mm.
10-1974/D	HOLD-DOWN SPRING Bwtween PTFE disk and oxidation vessele for ensure rotation of the sample container
10-1922/CU	COPPER CATALYST, pack of 5 pcs L=3 m.
10-1441/P	SILICON CARBIDE ABRASIVE CLOTH 100 GRIT, pack of 25 m
10-0371/50	SILICONE OIL 50 cSt, pack of 25 kg For temperature from 100°C (212°F) to 200°C (392°F)
2470/EL200	ELECTRONIC BALANCE Range 200 g., readout 0.01, pan Ø130
T-IP37C	THERMOMETER IP37C

For ASTM D4742 D7098

10-1971	OXIDATION VESSEL RPVOT (RBOT)/TFOUT Made of stainless steel AISI 316L. Complete of a lid, cap, stem and needle valve ¼". Tested at 100 bar / 1450 psi @25°C
10-1973/A	RECORDING MANOMETER Chart, 0-200 psi
10-MANDIG/30	DIGITAL MANOMETER 30 bar / 435 psi / 3000 kPa, data logger, RS232C
10-MANDIG/30/C	CERTIFICATE DIGITAL MANOMETER 30 bar / 435 psi / 3000 kPa, data logger, RS232C
10-1974/E	ALUMINUM INSERT Ø6.03x7.46 cm
10-1974/F	SAMPLE CONTAINER Made of glass
10-1974/G	PTFE COVER Ø57.2x0.8 mm., with central hole Ø3.2 mm.
10-1974/D	HOLD-DOWN SPRING Bwtween PTFE disk and oxidation vessele for ensure rotation of the sample container

10-1977/A	CATALYST "A", pack of 3 kit (ASTM D4742) For about 39 test
10-1977/B	CATALYST "B", pack of 3 kit (ASTM D7098) For about 39 test
10-0371/50	SILICONE OIL 50 cSt, pack of 25 kg For temperature from 100°C (212°F) to 200°C (392°F)
2470/BC160	ELECTRONIC BALANCE Range 160 g., readout 0.001, pan Ø110
T-AS102C	THERMOMETER ASTM 102C

CONSUMABLES x 2 YEARS

10-1922/CU	COPPER CATALYST, pack of 5 pcs x4
10-1977/A	CATALYST "A", pack of 3 kit (ASTM D4742) For about 39 test
10-1977/B	CATALYST "B", pack of 3 kit (ASTM D7098) For about 39 test
10-1441/P	SILICON CARBIDE ABRASIVE CLOTH 100 GRIT, pack of 25 m x2
15-1973/B	CHART FOR RECORDING MANOMETER, 0-200 psi pack of 100 pcs x4
15-1973/C	PENS FOR RECORDING MANOMETER, pack of 10 pcs x1
15-2066	O-RING VITON FOR COVER, pack of 10 pcs x1
15-1979/S	O-RING PTFE FOR STEM, pack of 10 pcs x1

SPARE PARTS

14-0002	PROBE PT100A
16-0005	DIGITAL THERMOREGULATOR
15-0015	STATIC RELAY
15-0004	BIPOLAR GREEN SWITCH
15-0005	BIPOLAR YELLOW SWITCH
12-0001	MOTOR STIRRER

OXIDATION

OXIDATION STABILITY - MINERAL INSULATING OIL

ASTM D2440 IP 307 (obs) ISO 7624 OXIDATION STABILITY OF MINERAL INSULATING OIL

This test method determines the resistance of mineral transformer oils to oxidation under prescribed accelerated aging conditions. Oxidation stability is measured by the propensity of oils to form sludge and acid products during oxidation. This test method is applicable to new oils, both uninhibited and inhibited, but is not well defined for used or reclaimed oils

IP 48 DETERMINATION OF OXIDATION CHARACTERISTICS OF LUBRICATING OIL

This method indicates the tendency of a lubricating oil to deteriorate on oxidation under specified conditions

IP 280 PETROLEUM PRODUCTS AND LUBRICANTS - INHIBITED MINERAL TURBINE OILS - DETERMINATION OF OXIDATION STABILITY

This International Standard specifies a method for the determination of the resistance to oxidation under specified conditions of unused inhibited mineral turbine oils. The method is also applicable to other types of oil, such as hydraulic oil.

IP 306 DETERMINATION OF OXIDATION STABILITY OF STRAIGHT MINERAL OIL

This method is designed to give a measure of the tendency of straight (i.e. plain) mineral lubricating oil to oxidise under specified conditions

IP 335 (obs) STABILITA' ALL' OSSIDAZIONE DEGLI OLI MINERALI ISOLANTI INIBITI

EN 61125-A TEST FOR EVALUATING THE OXIDATION STABILITY OF UNUSED UNINHIBITED MINERAL INSULATING OIL

EN 61125-B TEST FOR EVALUATING THE OXIDATION STABILITY OF UNUSED INHIBITED MINERAL INSULATING OILS BY MEASUREMENT OF THE INDUCTION PERIOD.

EN 61125-C TEST FOR EVALUATING THE OXIDATION STABILITY OF UNUSED HYDROCARBON BASED INSULATING LIQUIDS UNDER ACCELERATED CONDITIONS REGARDLESS OF WHETHER OR NOT ANTIOXIDANT ADDITIVES ARE PRESENT

6-positions oil bath with double bottom. Stainless steel structure with insulation double wall, cover with 6 holes. support for the flowmeters and absorption tubes. Temperature regulation by digital thermoregulator PID with PT100 probe class A and overtemperature alarm, stainless steel heater, motor stirrer, safety internal level for low liquid with warning lamp, drain cock

Technical specifications:

- Temperature: from ambient to 210°C (410°F)
- Stability: $\pm 0.1^\circ\text{C}$
- Power supply: 230V $\pm 10\%$ 50/60Hz
- Power: 2400W
- Dimensions: 60x57x52 cm
- Weight: 35 kg

1980 OXIDATION STABILITY BATH

1980/S/4 OXIDATION STABILITY DRY BATH (4 POSITIONS)

With aluminum block dry model, 4 positions

Technical specifications:

- Temperature: from ambient to 210°C (410°F)
- Stability: $\pm 0.5^\circ\text{C}$
- Power supply: 230V $\pm 10\%$ 50/60Hz

1980/S/8 OXIDATION STABILITY DRY BATH (8 POSITIONS)

With aluminum block dry model, 8 positions

Technical specifications:

- Temperature: from ambient to 210°C (410°F)
- Stability: $\pm 0.5^\circ\text{C}$
- Power supply: 230V $\pm 10\%$ 50/60Hz
- Power: 1900W
- Dimensions: 45x45x52 cm
- Weight: 45 kg



1980

2010



1980/S/8

2008

OXIDATION

ACCESSORIES ON REQUEST

10-1980	OXIDATION/ABSORPTION TUBE Borosilicate glass Ø26x210 mm with Drechsel head and inlet tube 24/29 ground joint The test method "B" and "C" required two oxidation tube
10-1981	CONNECTION SET For connections the oxidation tube and absorption tube and flowmeter. Consisting of: 3 m silicone tube and 10 glass tubing.
10-1983	FLOWMETER 0.6-4 l/h For oxygen at 1 l/h For methods: ASTM D2440, IP 280, IP 306, IP 307, IP 335, EN 61125-A EN 61125-B
10-1984	FLOWMETER 0.1-1.55 l/h For air at 0.15 l/h For method: EN 61125-C
10-1985	FLOWMETER 2.5-25 l/h For air at 15 l/h For method: IP 48
10-1987	SOAP BUBBLE FLOWMETER Graduated from 0 to 10 ml
10-1928	REDUCER MANOMETER FOR O ₂ Cylinder fitting
10-1929	REDUCER MANOMETER FOR AIR Primary 0-250 bar, reducer 0-1 bar
10-1988	COPPER CATALYST, pack of 5 pcs L=3 m., (not necessary for IP 48)
10-1441/P	SILICON CARBIDE ABRASIVE CLOTH 100 GRIT, pack of 25 m (not necessary for EN 61125)
10-1988/P	SILICON CARBIDE ABRASIVE CLOTH 220 GRIT, pack of 25 m (not necessary for EN 61125)
10-0371/20	SILICONE OIL 20 cSt pack of 25 kg For temperature from ambient to 120°C (248°F)
10-0371/50	SILICONE OIL 50 cSt, pack of 25 kg For temperature from 100°C (212°F) to 200°C (392°F)
10-1986	PORCELAIN CRUCIBLE, pack of 5 pcs 50 ml
10-BUR/10	BURETTE 10 ml., div.0.01 ml.
10-1989	FILTER FUNNEL 125 ml.
2470/BCA200	ANALYTICAL BALANCE Range 220 g., readout 0.0001, pan Ø80
10-0332	DIGITAL STOPWATCH 7 digit LCD, max.10 hours, 1/100 sec, digit h=8 mm
T-IP22C	THERMOMETER IP22C For method IP 48
T-AS9C	THERMOMETER ASTM 9C IP 15C For method IP 280, IP 307, IP 335
T-AS40C	THERMOMETER ASTM 40C IP 80C For method IP 307, IP 335, EN 61125-A,
T-AS41C	THERMOMETER ASTM 41C IP 81C For method ASTM D2440, IP 280, IP 306, IP 335, EN 61125-B, EN 61125-C

CONSUMABLES x 2 YEARS

10-1988	COPPER CATALYST, pack of 5 pcs x4
10-1441/P	SILICON CARBIDE ABRASIVE CLOTH 100 GRIT, pack of 25 m x2
10-1988/P	SILICON CARBIDE ABRASIVE CLOTH 220 GRIT, pack of 25 m x2

SPARE PARTS

15-1980/P	OXIDATION/ABSORPTION TUBE
15-1980/D	DRECHSEL HEAD With inlet tube
14-0002	PROBE PT100A
11-0016	HEATER (for oil bath)
11-1980/S	HEATER (for dry bath)
16-0005	DIGITAL THERMOREGULATOR
15-0015	STATIC RELAY
15-0004	BIPOLAR GREEN SWITCH
15-0005	BIPOLAR YELLOW SWITCH
12-0001	MOTOR STIRRER

OXIDATION

GREASE

ASTM D942 IP 142 DIN 51808 OXIDATION STABILITY OF LUBRICATING GREASES BY THE OXYGEN PRESSURE VESSEL METHOD

This test method determines resistance of lubricating greases to oxidation when stored statically in an oxygen atmosphere in a sealed system at an elevated temperature under conditions of test

Oil bath or dry bath with structure in stainless steel, insulated double wall, cover with two holes for oxidation pressure vessel. Temperature regulation by digital thermoregulator PID with PT100 probe class A and overtemperature alarm, stainless steel heater, motor stirrer, safety internal level for low liquid with warning lamp.

Technical specifications:

- Temperature: from ambient to 120°C (248°F)
- Stability: ±0.1°C
- Power supply: 230V ±10% 50/60Hz
- Power: 1200W
- Dimensions: 55x36x45 cm
- Weight: 26 kg

2020 OXIDATION STABILITY GREASES BATH

Oil bath

2020/S OXIDATION STABILITY GREASES BATH

Dry bath, with aluminum block

ACCESSORIES ON REQUEST

10-2020	OXIDATION PRESSURE VESSEL Polished 18/8 stainless steel, 185ml capacity, oxygen inlet steam connected to a cover through a suspension flange of the bath, O-ring gasket, screw-top closure. Tested to 13 bar / 180 PSI at 25°C
10-2021	DISH, pack of 5 pcs Made of glass, Ø41 mm.
10-2022	PRESSURE GAUGE Scale 0-160 psi / 1100 kPa, div.0.5
10-MANDIG/30	DIGITAL MANOMETER 30 bar / 435 psi / 3000 kPa, data logger, RS232C
10-2023	DISH HOLDER Made of stainless steel, for 5 dishes
10-0371/20	SILICONE OIL 20 cSt pack of 25 kg For temperature from ambient to 120°C (248°F)
15-2063/R	HY-FLEX JUNCTION FOR O ₂
2470/EL200	ELECTRONIC BALANCE Range 200 g., readout 0.01, pan Ø130
T-AS22C	THERMOMETER ASTM 22C IP 24C

CONSUMABLES x 2 YEARS

10-2021	DISH, pack of 5 pcs x2
---------	------------------------

SPARE PARTS

15-2021	O-RING, pack of 5 pcs
15-2022	O-RING IN PTFE, pack of 10 pcs



OXIDATION

OXIDATION STABILITY OF GASOLINE

ASTM D525 IP 40 ISO 7536 DIN 51780 OXIDATION STABILITY OF GASOLINE (INDUCTION PERIOD METHOD)

This test method covers the determination of the stability of gasoline in finished form only, under accelerated oxidation conditions.

ASTM D873 IP 138 DIN 51799 OXIDATION STABILITY OF AVIATION FUELS (POTENTIAL RESIDUE METHOD)

This test method covers the determination of the tendency of aviation reciprocating, turbine, and jet engine fuels to form gum and deposits under accelerated aging conditions

Completely made in stainless steel. Temperature regulation by thermoregulator PID with PT100 probe class A and overtemperature alarm, stainless steel heater, motor stirrer, insulated double wall, safety internal level for low liquid with warning lamp. The cover works as a condenser with connections for water circulation

2010/2 OXIDATION STABILITY BATH (2 POSITIONS)

Oil bath

Technical specifications:

- Temperature: from ambient to 120°C (248°F)
- Stability: $\pm 0.1^\circ\text{C}$
- Capacity: 30 liters
- Power supply: 230V $\pm 10\%$ 50/60Hz
- Power: 2400W
- Dimensions: 62x38x100 cm
- Weight: 35kg

2010/4 OXIDATION STABILITY BATH (4 POSITIONS)

Oil bath

Technical specifications:

- Temperature: from ambient to 120°C (248°F)
- Stability: $\pm 0.1^\circ\text{C}$
- Capacity: 50 liters
- Power supply: 230V $\pm 10\%$ 50/60Hz
- Power: 3000W
- Dimensions: 58x47x98 cm

2010/6 OXIDATION STABILITY BATH (6 POSITIONS)

Oil bath

Technical specifications:

- Temperature: from ambient to 120°C (248°F)
- Stability: $\pm 0.1^\circ\text{C}$
- Capacity: 60 liters
- Power supply: 230V $\pm 10\%$ 50/60Hz



2010/S/2 OXIDATION STABILITY BATH (2 POSITIONS)

Dry bath, with aluminum block

Technical specifications:

- Temperature: from ambient to 120°C (248°F)
- Stability: $\pm 0.5^\circ\text{C}$
- Power supply: 230V $\pm 10\%$ 50/60Hz

2010/S/4 OXIDATION STABILITY BATH (4 POSITIONS)

Dry bath, with aluminum block

Technical specifications:

- Temperature: from ambient to 120°C (248°F)
- Stability: $\pm 0.5^\circ\text{C}$
- Power supply: 230V $\pm 10\%$ 50/60Hz

2010/S/6 OXIDATION STABILITY BATH (6 POSITIONS)

Dry bath, with aluminum block

Technical specifications:

- Temperature: from ambient to 120°C (248°F)
- Stability: $\pm 0.5^\circ\text{C}$
- Power supply: 230V $\pm 10\%$ 50/60Hz
- Dimensions: 75x52x90 cm
- Weight: 45 kg



OXIDATION

ACCESSORIES ON REQUEST

For ASTM D525 D873

10-2010	OXIDATION PRESSURE VESSEL Made of stainless steel, with safety burst disc assembly and discharge tube with valve, quick connection, 15 bar / 220 psi burst disc.
10-2011/2	RECORDING MANOMETER, 2-IN 2 pens, 0-200 psi, div.2
10-2011/3	RECORDING MANOMETER, 3-IN 3 pens, 0-200 psi, div.2
10-MANDIG/30	DIGITAL MANOMETER 30 bar / 435 psi / 3000 kPa, data logger, RS232C
10-2002	GLASS SAMPLE CONTAINER With cover
10-2012	COPPER JUNCTION FROM RECORDER MANOMETER AND PRESSURE VESSEL
10-2013	HY-FLEX JUNCTION FOR O ₂
10-2014	PRESSURE REDUCER
2470/BCA200	ANALYTICAL BALANCE Range 220 g., readout 0.0001, pan Ø80
T-AS22C	THERMOMETER ASTM 22C IP 24C

Only for ASTM D873

10-2016	COOLING TANK
---------	--------------

CONSUMABLES x 2 YEARS

15-2005	BURST DISC 15 bar / 220 psi x1
15-2001/P	PEN FOR RECORDING MANOMETER, x2 pack of 10 pcs
15-2001/C	CHART FOR RECORDING MANOMETER, x4 pack of 100 pcs
15-2003	O-RING, pack of 10 pcs
15-2004	O-RING IN PTFE, pack of 10 pcs

SPARE PARTS

14-0002	PROBE PT100A
11-0016	HEATER (<i>for oil bath</i>)
11-2010/S	HEATER (<i>for dry bath</i>)
16-0005	DIGITAL THERMOREGULATOR
15-0015	STATIC RELAY
15-0004	BIPOLAR GREEN SWITCH
15-0005	BIPOLAR YELLOW SWITCH
12-0001	MOTOR STIRRER

OXIDATION

CORROSIVENESS AND OXIDATION STABILITY OF OILS

ASTM D4636 CORROSIVENESS AND OXIDATION STABILITY OF HYDRAULIC OILS, AIRCRAFT TURBINE ENGINE LUBRICANTS, AND OTHER HIGHLY REFINED OILS

This test method covers the testing of hydraulic oils, aircraft turbine engine lubricants, and other highly refined oils to determine their resistance to oxidation and corrosion degradation and their tendency to corrode various metals. Petroleum and synthetic fluids may be evaluated using moist or dry air with or without metal test specimens.

ASTM D5968 EVALUATION OF CORROSIVENESS OF DIESEL ENGINE OIL AT 121°C

This test method is used to test diesel engine lubricants to determine their tendency to corrode various metals, specifically alloys of lead and copper commonly used in cam followers and bearings

ASTM D6594 EVALUATION OF CORROSIVENESS OF DIESEL ENGINE OIL AT 135°C

This test method covers testing diesel engine lubricants to determine their tendency to corrode various metals, specifically alloys of lead and copper commonly used in cam followers and bearings

6 positions dry bath. Stainless steel structure with aluminum block with 6 holes for sample tubes, one digital thermoregulator PID with overtemperature alarm, 6 digital thermometers with 6 thermocouples for the sample tube, 6 flowmeters for air 10 l/h with relative valves of regulation, support for glasswares.

Technical specifications:

- Temperature: from ambient to 400°C (752°F)
- Stability: ±0.5°C
- Power supply: 230V ±10% 50/60Hz
- Power: 6000W
- Dimensioni: 86x32x120 cm
- Weight: 54 kg

1990 STABILITY OXIDATION AND CORROSION BATH



CONSUMABLES x 2 YEARS

- | | |
|-----------|-------------------------------------|
| 10-1992 | SQUARE SHAPED METAL SPECIMENS x4 |
| 10-1993 | WASHER SHAPED METAL SPECIMENS x4 |
| 10-1994 | SQUARE METAL SPECIMENS x4 |
| 0-1997 | SQUARE METAL SPECIMENS x4 |
| 10-1441/L | SILICON CARBIDE PAPER 240 GRIT, x4 |
| 10-1441/O | SILICON CARBIDE GRAINS 150 MESH, x2 |
| 10-1441/Q | SILICON CARBIDE PAPER 400 GRIT, x4 |
| 10-1996 | ALUMINUM OXIDE PAPER 240 GRIT. x4 |

SPARE PARTS

- | | |
|-------------|------------------------|
| 15-1991/AT | AIR TUBE |
| 15-1991/C | ALLIHN CONDESER |
| 15-1991/ST | MAIN SAMPLE TUBE |
| 15-1991/STH | SAMPLE TUBE HEAD |
| 15-1991/D | SPACERS, pack of 6 pcs |
| 14-1990/B | BATH THERMOCUPLE |
| 14-1990/T | TEST TUBE THERMOCUPLE |

ACCESSORIES ON REQUEST

- | | |
|---------|--|
| 10-1991 | SAMPLE TUBE |
| | Consisting of: main sample tube, air tube, Allihn condenser, 6x borosilicate glass spacers and sample tube head with 3 holes: one for air tube, one for condenser and one for thermocouple |

For ASTM D4636

- | | |
|-------------|--|
| 10-1992 | SQUARE SHAPED METAL SPECIMENS |
| | Consisting of: copper, steel grade 1010, aluminum alloy 2024, magnesium and cadmium |
| 10-1993 | WASHER SHAPED METAL SPECIMENS |
| | Consisting of: titanium, magnesium, steel M50, steel grade 1010, silicon-iron-bronze, silver, alluminum alloy 2024 |
| 1220 | CENTRIFUGE |
| 10-1222 | BUCKET FOR CONE-SHAPED TUBE, pack of 4 pcs |
| | For 10-1225 and 10-1226, made of aluminum, included Polyurethane support for tube |
| 10-1225 | CENTRIFUGE TUBE CONE-SHAPED, pack of 4 pcs |
| | 100 ml, 203 mm, div. from 0 to 0.5:0.05, from 0.5 to 2:0.1, from 2 to 3:0.2, from 3 to 5:0.5, from 5 to 10:1, from 10 to 25:5, from 25 to 100:25 |
| 10-1441/L | SILICON CARBIDE PAPER 240 GRIT, pack of 50 pcs |
| 10-1441/O | SILICON CARBIDE GRAINS 150 MESH, pack of 1 kg |
| 10-1441/Q | SILICON CARBIDE PAPER 400 GRIT, pack of 50 pcs |
| 2470/BCA250 | ANALYTICAL BALANCE |
| | Range 250 g., readout 0.0001, pan Ø80 |
| 2470/EL3000 | ELECTRONIC BALANCE |
| | Range 3000 g., readout 0.01, pan Ø130 |

For ASTM D5968

- | | |
|-------------|---|
| 10-1997 | SQUARE METAL SPECIMENS |
| | Set of 4 metals: copper, lead, tin, phosphor bronze |
| 10-1996 | ALUMINUM OXIDE PAPER 240 GRIT, pack of 50 pcs |
| 10-1441/Q | SILICON CARBIDE PAPER 400 GRIT, pack of 50 pcs |
| 2470/BCA250 | ANALYTICAL BALANCE |
| | Range 250 g., readout 0.0001, pan Ø80 |
| 2470/EL3000 | ELECTRONIC BALANCE |
| | Range 3000 g., readout 0.01, pan Ø130 |

For ASTM D6594

- | | |
|-----------|---|
| 10-1994 | SQUARE METAL SPECIMENS |
| | Set of 4 metals: copper, lead, tin, phosphor bronze |
| 10-1995 | HANGER |
| | Made of stainless steel |
| 10-2574 | SIRYNGE |
| | 100 ml, needle L=100 mm |
| 10-1996 | ALUMINUM OXIDE PAPER 240 GRIT, pack of 50 pcs |
| 10-1441/Q | SILICON CARBIDE PAPER 400 GRIT, pack of 50 pcs |

RUST

RUST-PREVENTING OF OILS

ASTM D665 IP 135 RUST-PREVENTING CHARACTERISTICS OF INHIBITED MINERAL OIL IN THE PRESENCE OF WATER

This test method covers the evaluation of the ability of inhibited mineral oils, particularly steam-turbine oils, to aid in preventing the rusting of ferrous parts should water become mixed with the oil. This test method is also used for testing other oils, such as hydraulic oils and circulating oils. Provision is made in the procedure for testing heavier-than-water fluids.

ASTM D3603 RUST-PREVENTING CHARACTERISTICS OF STEAM TURBINE OIL IN THE PRESENCE OF WATER (HORIZONTAL DISK METHOD)

This test method covers the ability of steam-turbine oils to prevent the rusting of horizontal and vertical ferrous surfaces when water becomes mixed with the oil.

ASTM D5534 VAPOR-PHASE RUST-PREVENTING CHARACTERISTICS OF HYDRAULIC FLUIDS

This test method covers the ability of hydraulic fluids to prevent the rusting of steel in the vapor phase over the hydraulic fluid and water

ISO 7120 PETROLEUM PRODUCTS AND LUBRICANTS -- PETROLEUM OILS AND OTHER FLUIDS -- DETERMINATION OF RUST-PREVENTING CHARACTERISTICS IN THE PRESENCE OF WATER

Defines a method for evaluating these products to indicate the effectiveness in preventing the rusting of ferrous parts should water becomes mixed the oil/fluid. The methods for application to inhibited oils including steam turbine oils, circulating oils and hydraulic oils and non-hydrocarbon fluids including fluids denser than water.

Oil bath completely made of stainless steel, with double insulated wall. Temperature regulation by digital thermoregulator PID with PT100 probe class A and overtemperature alarm, stainless steel heater, motor stirrer, safety internal level for low liquid with warning lamp.

T-shaped stainless steel stirrers rotate in their glasses at a constant speed of 1000 ±50 rpm. Transmission frame and upper weir with bearings block and pulley.

Technical specifications:

- Temperature: from ambient to 120°C (248°F)
- Stability: ±0.1°C
- Power supply: 230V ±10% 50/60Hz
- Power: 1800W

1940/4 RUST PREVENTION BATH (4 POSITIONS)

- Dimensions: 65x22x60 cm
- Weight: 35 kg

1940/6 RUST PREVENTION BATH (6 POSITIONS)

- Dimensions: 115x22x60 cm
- Weight: 40 kg



RUST

ACCESSORIES ON REQUEST

For ASTM D665 IP 135 ISO 7120

10-1172	BEAKER, 400 ml Tall form
10-1942/665	TEST ROD Made of steel
10-1947	ALUMINUM OXIDE CLOTH 150, pack of 50 pcs CAMI 150 / FEPA P150
10-1948	ALUMINUM OXIDE CLOTH 280, pack of 50 pcs CAMI 240 / FEPA P280
10-1940	GRINDING AND POLISHING DEVICE With suitable chuck for holding the test rod ASTM/IP and one for ISO. Rotation 1750 ±50 rpm
10-0371/20	SILICONE OIL 20 cSt pack of 25 kg For temperature from ambient to 120°C (248°F)
T-AS9C	THERMOMETER ASTM 9C IP 15C
T-IP21C	THERMOMETER IP 21C

Only for Procedure "A" and "B"

10-1941/665AB	BEAKER COVER Made of PMMA
10-1943/AB	HOLDER Made of PMMA
10-1945/AB	"T" STIRRER Made of stainless steel

Only for Procedure "C"

10-1941/665C	BEAKER COVER Made of PCTFE
10-1943/C	HOLDER Made of PTFE
10-1945/C	AUXILIARY STIRRER Made of stainless steel

For ASTM D3603 D5534

10-1172	BEAKER, 400 ml Tall form
10-1958	BEAKER, 25 ml (solo per ASTM D5534)
10-1941/3603	BEAKER COVER Consisting of: PMMA cover with two stainless steel rods and PTFE specimen holder.
10-1942/3603	TEST SPECIMENS
10-1945/AB	"T" STIRRER Made of stainless steel
10-1947	ALUMINUM OXIDE CLOTH 150, pack of 50 pcs CAMI 150 / FEPA P150
10-1948	ALUMINUM OXIDE CLOTH 280, pack of 50 pcs CAMI 240 / FEPA P280
10-1940	GRINDING AND POLISHING DEVICE With suitable chuck for holding the test rod ASTM/IP and one for ISO. Rotation 1750 ±50 rpm
10-0371/20	SILICONE OIL 20 cSt pack of 25 kg For temperature from ambient to 120°C (248°F)
T-AS9C	THERMOMETER ASTM 9C IP 15C

CONSUMABLES x 2 YEARS

For ASTM D665 IP 135 ISO 7120

10-1942/665	TEST ROD x4
10-1947	ALUMINUM OXIDE CLOTH 150, pack of 50 pcs x4
10-1948	ALUMINUM OXIDE CLOTH 280, pack of 50 pcs x4

For ASTM D3603 D5534

15-1942/3603O	HORIZONTAL SPECIMEN
15-1942/3603V	VERTICAL SPECIMEN
15-1942/3603W	PTFE WASHER
10-1947	ALUMINUM OXIDE CLOTH 150, pack of 50 pcs x4
10-1948	ALUMINUM OXIDE CLOTH 280, pack of 50 pcs x4

SPARE PARTS

15-1941/C	BELT
12-1940	MOTOR
14-0002	PROBE PT100A
11-0018	HEATER
16-0005	DIGITAL THERMOREGULATOR
15-0015	STATIC RELAY
15-0004	BIPOLAR GREEN SWITCH
15-0005	BIPOLAR YELLOW SWITCH

RUST

ASTM D1748 RUST PROTECTION BY METAL PRESERVATIVES IN THE HUMIDITY CABINET

This test method covers the evaluation of the rust-preventive properties of metal preservatives under conditions of high humidity

Thermostatic 18/8 stainless steel tank with double wall. Hinged cover consists of layer of desized cotton cloth secured to an aluminium frame, basket rotating at 1/3 rpm housing 33 sample plates. Air is distributed through 20 diffuser ball-shape placed on the tank bottom. Flowmeter with valve throttling at 15 l/min air. Level is kept constant by a compensating system. Electric heating with 2 armoured stainless steel heaters, controlled by a digital thermoregulator PID with overtemperature alarm. Two thermometers, bottle for feeding the tank and 33 hooks left and 33 right.

Technical specifications:

- Temperature: from ambient to 50°C (122°F)
- Stability: $\pm 1.1^{\circ}\text{C}$
- Power supply: 230V $\pm 10\%$ 50Hz
- Power: 1000W
- Dimensions: 100x80x98 cm
- Weight: 95 kg

2500 HUMIDITY CABINET

ACCESSORIES ON REQUEST

10-1172	BEAKER, 400 ml Tall form
10-2501	AIR SYSTEM 0-30 psi pressure regulator and Fresenius column
10-2502	PANEL pack of 5 pcs Made of steel, 51x102x3.2 mm
10-2504	DUMMY PANEL Made of PMMA, 51x102x3.2 mm
10-2505	TEMPERATURE AND HUMIDITY RECORDING
10-2507	ALUMINUM OXIDE CLOTH 240, pack of 50 pcs 240 grit
10-2509	pH PAPER, pack of 20 pcs

CONSUMABLES x 2 YEARS

10-2507	ALUMINUM OXIDE CLOTH 240, pack of 50 pcs x4
10-2509	pH PAPER, pack of 20 pcs x2

SPARE PARTS

15-2501	FRESENIUS COLUMN
15-2503/S	LEFT SUSPENSION HOOK, pack of 33 pcs
15-2503/D	RIGHT SUSPENSION HOOK, pack of 33 pcs
15-1903	DIFFUSER BALL-SHAPE
15-2504	COTTON CLOTH FOR COVER
15-2507	TANK
15-1132/2000	ERLENMEYER FLASK, 2000 ml
15-2508	FLOWMETER
11-2501	HEATER
14-0001	PROBE PT100A
14-2500	TEMPERATURE AND HUMIDITY PROBE
16-0005	DIGITAL THERMOREGULATOR
15-0015	STATIC RELAY
15-0004	BIPOLAR GREEN SWITCH
15-0005	BIPOLAR YELLOW SWITCH
12-2500	MOTOR



2500

2009

ASTM D1837 VOLATILITY OF LIQUEFIED PETROLEUM (LP) GASES

This test method is a measure of the relative purity of the various types of liquefied petroleum (LP) gases and helps to ensure suitable volatility performance. The test results, when properly related to vapor pressure and density of the product, can be used to indicate the presence of butane and heavier components in propane type LP-gas, and pentane and heavier components in propane-butane and butane type fuels. The presence of hydrocarbon compounds less volatile than those of which the LP-gas is primarily composed is indicated by an increase in the 95% evaporated temperature.

ASTM D2158 IP 317 RESIDUES IN LIQUEFIED PETROLEUM (LP) GASES

This test method covers the determination of extraneous materials weathering above 38°C (100°F) that are present in liquefied petroleum gases. The extraneous materials will generally be dissolved in the LPG, but may have phase-separated in some instances

18/8 stainless steel bath with double wall, copper cooling coil with one ¼" and one ⅛" valve, internal support for tube.

Technical specifications:

- Dimensions: 36x15x40 cm

- Weight: 3 kg

1700 VOLATILITY OF LPG APPARATUS

ACCESSORIES ON REQUEST

For ASTM D1837

- 10-1701 WEATHERING TUBE
With cork, 100 ml, 203 mm, div. 0-0.5:0.05, 0.5-3:0.1, 3-5:0.5, 5-100:1
- 10-1702 SUPPORT WITH BATH
Made of stainless steel, for 3 weathering tube
- 10-1187/P PRECISION CYLINDER TYPE B 100 ml
Graduated 1-100:0.1 ml
- T-AS99C/ARM THERMOMETER ASTM 99C CORAZZATO

For ASTM D2158 IP 317

- 10-1701 TUBWEATHERING TUBE
With cork, 100 ml, 203 mm, div. 0-0.5:0.05, 0.5-3:0.1, 3-5:0.5, 5-100:1
- 10-1702 SUPPORT WITH BATH
Made of stainless steel, for 3 weathering tube
- 10-1703 SYRINGE
Cap.2 ml., div.0.1, needle L=200 mm.
- 10-1704 FILTER PAPER
Medium grade, Ø125 mm., pack of 100 pcs
- 10-1705 COPPER WIRE
Ø1.5 mm., L=300 mm.
- T-AS5C THERMOMETER ASTM 5C IP 1C
- T-AS6C THERMOMETER ASTM 6C IP 2C
- T-AS57C THERMOMETER ASTM 57C

CONSUMABLES x 2 YEARS

- 10-1701 WEATHERING TUBE x2
- 15-1703 CORK, pack of 5 pcs x1

Per ASTM D2158 IP 317

- 10-1703 SYRINGE x1
- 10-1704 FILTER PAPER x4
- 10-1705 COPPER WIRE x4

SPARE PARTS

- 15-1702 COPPER COOLING COIL
- 15-1704 WEATHERING TUBE SUPPORT



EN 15469 FREE WATER IN LIQUEFIED PETROLEUM GAS BY VISUAL INSPECTION

This test method covers the use of a pressure cylinder to determine the presence of free water in liquefied petroleum gas (LPG) by visual inspection below 0°C (32°F).

Tubular chamber made of acrylic resins 250 ml. capacity, metallic headers coupled stainless steel tierods, neoprene gaskets, fitted with a inlet bottom valve and a top vent valve, hole for thermometer. Tested at 15 bar hydraulic pressure.

1760 FREE WATER IN LPG APPARATUS



ASTM D1657 DENSITY OR RELATIVE DENSITY OF LIGHT HYDROCARBONS BY PRESSURE HYDROMETER

This test method covers the determination of the density or relative density of light hydrocarbons including liquefied petroleum gases (LPG) having Reid vapor pressures exceeding 101.325 kPa (14.696 psi).

IP 235 ISO 3993 DETERMINATION OF DENSITY OF LIGHT HYDROCARBONS - PRESSURE HYDROMETER METHOD

This method provides a procedure for determining the density of light hydrocarbons including liquefied petroleum gases. The prescribed apparatus should not be used for materials having vapour pressures higher than 14 bar at the test temperature.

Chamber made of polymethylmethacrylate Ø50X36 mm L=440 mm with mesh for safety, metallic headers coupled with six stainless steel tierods, neoprene gaskets, three ¼" pin valves: inlet and outlet valves are mounted in the base and third valve on the top of instrument for connection to the LPG line, stainless steel manometer Ø100 mm scale 0-400 psi/ 2758 kPa.

Working pressure max. 14 bar / 200 psi / 1379 kPa

With hydraulic testing certificate at 28 bar / 400 psi / 2758 kPa

Technical specifications:

- Dimensions: Ø17x66 cm
- Weight: 3.2 kg

CONSUMABLES x 2 YEARS

15-1752 GASKET, pack of 10 pcs x1

SPARE PARTS

15-1753 POLYMETHYLMETHACRYLATE CYLINDER
Ø50x36 mm, L=440 mm

15-1754 SAFETY MESH

15-1758 MANOMETER 0-400 psi/2758 kPa

1750 HYDROMETER APPARATUS**ACCESSORIES ON REQUEST**

1770 THERMOSTATIC BATH
Stainless steel structure, capacity 90 liters about, insulated interspace. The temperature control is a thermoregulator PID with PT100 probe class A and overtemperature alarm, stainless steel heater, cooling coil, motor stirrer, insulated double wall, safety internal level for low liquid with warning lamp. For 4 hydrometers.
Technical specifications:
- Temperature: from ambient to 90°C (194°F) ±0.1°C
- Bath capacity: 90 liters about
- Power supply: 230V ±10% 50/60Hz
- Power: 3200W
- Dimensions: 54x50x89 cm
- Weight: 39 kg

For ASTM D1657

10-1751 THERMOHYDROMETER ASTM 310H
500-650 kg/m³, div.1, L=390 mm, ref. temperature 15°C, thermometer 0 +35°C div.0.5°

10-1752 THERMOHYDROMETER ASTM 101H
0.500-0.650 sp g, div.0.001, L=360 mm, ref. temperature 60/60°F, thermometer 30 +90°F div.1°

For IP 235 ISO 3993

10-1765 HYDROMETER
0.500-0.580 sp g, div.0.001, L=330 mm, ref. temperature 15°C

10-1766 HYDROMETER
0.570-0.650 sp g, div.0.001, L=330 mm, ref. temperature 15°C

T-1750/BS THERMOMETER BS593 B60C/TOTAL
Scale -20 +60°C, div.0.2°, L=400 mm., total imm.

T-1750/ISO THERMOMETER ISO R653
Scale -15° +45°C



1750

2013

Consists of an indicator with nickel-plated brass protective sheath with flow-off orifice on the header, fitted with a screw cap, tightness-proof Pyrex capillary tube placed on neoprene gaskets containing the bromide indicator; a copper cooling coil with threaded T-shaped connection $\frac{1}{4}$ " and $\frac{1}{4}$ " needle valve, a manometer $\frac{1}{4}$ " connection, 0-15 bar/232 psi scale, a \varnothing 130x230 mm, borosilicate jar.

1780 COBALT BROMIDE APPARATUS GPA 2140

ACCESSORIES ON REQUEST

10-1784 COBALT BROMIDE, pack of 50 g.

CONSUMABLES x 2 YEARS

10-1784 COBALT BROMIDE, pack of 50 g. x2
15-1785 NEOPRENE GASKET, pack of 10 pcs x1

SPARE PARTS

15-1780 INDICATORE
Con guaina e orifizio di sfogo
15-1782 MANOMETER 0-16 bar/232 psi
15-1783 BOROSILICATO JAR
15-1786 CAPILLARY TUBE



1780

2011

ASTM D2420 HYDROGEN SULFIDE IN LIQUEFIED PETROLEUM (LP) GASES (LEAD ACETATE METHOD)

This test method covers the detection of hydrogen sulfide in liquefied petroleum (LP) gases. The sensitivity of the test is about 4 mg/m³ (0.15 to 0.2 grain of hydrogen sulfide per 100 ft³) of gas

Consisting of: stainless steel cylinder of 500 ml. with needle valve connected to a glass cylinder with caps means a stainless steel tube interrupted half from a needle valve, water bath controlled by a thermostat for temperature and stainless steel electric heater, flowmeter 0.2-3 l/min, watch glass with its holder, glass hook full for the suspended particles of lead acetate

Technical specifications:

- Temperature: from ambient to 80°C (176°F)
- Stability: $\pm 1^\circ\text{C}$
- Power supply: 230V $\pm 10\%$ 50Hz
- Power: 1200W
- Capacity: 12 liters
- Dimensions: 42x27x65 cm
- Weight: 14 kg

2300 HYDROGEN SULFIDE APPARATUS

ACCESSORIES ON REQUEST

10-2301 LEAD ACETATE TEST PAPER, pack of 5 m

CONSUMABLES x 2 YEARS

10-2301 LEAD ACETATE TEST PAPER, pack of 5 m x4

SPARE PARTS

15-2302 WATCH GLASS , pack of 4 pcs
15-2303 GLASS CYLINDER, pack of 3 pcs
15-2304 GLASS ROD, pack of 3 pcs
15-2305 GLASS TUBE \varnothing 3x6 MM
15-2306 500 ml CYLINDER WITH NEEDLE VALVE
15-2307 RUBBER STOPPER, pack of 2 pcs



2300

2010

DEW POINT**ASTM D1142 WATER VAPOR CONTENT OF GASEOUS FUELS BY MEASUREMENT OF DEW-POINT TEMPERATURE**

This test method covers the determination of the water vapor content of gaseous fuels by measurement of the dew-point temperature and the calculation therefrom of the water vapor content.

60 mm dia. pressure gauge with 0-160 bar/2320 psi scale, cooling chamber with ¼" gas valve, stainless steel block with ¼" gas valves, plexiglass window, external mirror.

Technical specifications:

1730 DEW-POINT APPARATUS**ACCESSORIES ON REQUEST**

10-1732	CASE Robust plastic case with foam inserts, protection IP67
10-1733	HY-FLEX JUNCTION For CO ₂ . ¼"/ ¼" female, for high pressure
10-1734	FIELD TRIPOD SUPPORT Made of aluminum with carrying strap
10-1735	LABORATORY TRIPOD SUPPORT
T-AS33C	THERMOMETER ASTM 33C

CONSUMABLES x 2 YEARS

15-1730/30	O-RING, pack of 10 pcs x1
15-1730/PT	O-RING IN PTFE, pack of 10 pcs x1

SPARE PARTS

15-1731	BODY WITH STAINLESS STEEL MIRROR
15-1732	THERMOMETER JACKET
15-1733	MANOMETER 0-160 BAR/2320 PSI
15-1735	EXTERNAL MIRROR
15-1736	WINDOW
15-1737	STAINLESS STEEL MIRROR
15-1738	COOLING CHAMBER



1730 + 10-1735

2011

SCHILLING**IP 59 METHOD "C" (Obs) DENSITY AND RELATIVE DENSITY OF GASES - THE EFFUSION METHOD**

This method is based on the fact that the times taken by equal volumes of gases to flow through a small orifice under the same conditions are proportional to the square roots of the densities of the gases.

Consisting of: glass cylinder, cylinder cover fitted with three sphere valves for gas charge and flow-off, stainless steel orifice plate Ø0.45 mm, internal tube fitted with two calibration lines, support for internal tube, metal stand with carrying handle.

Technical specifications:

- Dimensions: Ø13X70 cm
- Weight: 5 kg

2310 SCHILLING EFFUSIOMETER**ACCESSORIES ON REQUEST**

10-2311	CASE Robust plastic case with foam inserts, protection IP67
T-IP39C	THERMOMETER IP39C

CONSUMABLES x 2 YEARS

15-2314	O-RING FOR ORIFICE, pack of 10 pcs x1
---------	---------------------------------------

SPARE PARTS

15-2311	GLASS CYLINDER
15-2312	INTERNAL TUBE
15-2313/H	HOLDER FOR CALIBRATED ORIFICE
15-2313/P	PLATE CALIBRATED ORIFICE
15-2315	DISCHARGE TUBE WITH 3 COCK
15-2316	COVER
15-2317	SUPPORT



2310

2010

VAPOR PRESSURE

ASTM D1267 IP 161 IP 410 EN ISO 4256 GAGE VAPOR PRESSURE OF LIQUEFIED PETROLEUM (LP) GASES (LP-GAS METHOD)

This test method covers the determination of the gage vapor pressures of liquefied petroleum gas products at temperatures of 37.8°C (100°F) up to and including a test temperature of 70°C (158°F)

Stainless steel upper chamber with threaded lower neck which allows the connection to the valve, and ¼" threaded upper head for pressure gauge fitting a ¼" discharge pin valve.
With hydraulic testing certificate at 70 bar/1015 psi/7000 kPa

1740/U VAPOR PRESSURE CYLINDER UPPER CHAMBER

Stainless steel 20% lower chamber two opening.
With straight-through valve and ¼" inlet valve.
With hydraulic testing certificate at 70 bar/1015 psi/7000 kPa

1740/L20 VAPOR PRESSURE CYLINDER 20% LOWER CHAMBER

Stainless steel 33 $\frac{1}{3}$ % lower chamber one opening.
With hydraulic testing certificate at 70 bar/1015 psi/7000 kPa

1740/L33 VAPOR PRESSURE CYLINDER 33 $\frac{1}{3}$ % LOWER CHAMBER

CONSUMABLES x 2 YEARS

- | | |
|---------|--|
| 15-1743 | NEOPRENE GASKET CHAMBER,
pack of 10 pcs x1 |
| 15-1744 | NEOPRENE GASKET FOR PRESSURE GAUGE,
pack of 10 pcs x1 |

SPARE PARTS

- | | |
|-----------|------------------|
| 15-1740/R | VALVE FF ¾" |
| 15-1745 | TOTAL FLOW VALVE |

ACCESSORIES ON REQUEST

- | | |
|-------------|---|
| 1770 | THERMOSTATIC BATH
Stainless steel structure, capacity 90 liters about, insulated interspace. The temperature control is a thermoregulator PID with PT100 probe class A and overtemperature alarm, stainless steel heater, cooling coil, motor stirrer, insulated double wall, safety internal level for low liquid with warning lamp. For 6 vapor pressure cylinder.
Technical specifications:
- Temperature: from ambient to 90°C (194°F) ±0.1°C
- Bath capacity: 90 liters about
- Power supply: 230V ±10% 50/60Hz
- Power: 3200W
- Dimensions: 54x50x89 cm.
- Weight: 39 kg. |
| 10-1741/10 | PRESSURE GAUGE 10 BAR/145 PSI
Double scale 0-10 bar/0-145 psi, made of stainless steel Ø100, ¼" male |
| 10-1741/25 | PRESSURE GAUGE 25 BAR/360 PSI
Double scale 0-25 bar/0-360 psi, made of stainless steel Ø100, ¼" male |
| 10-1741/40 | PRESSURE GAUGE 40 BAR/580 PSI
Double scale 0-40 bar/0-580 psi, made of stainless steel Ø100, ¼" male |
| 10-1741/100 | PRESSURE GAUGE 100 PSI/700 KPA
Double scale 0-100 psi/0-700 kPa, made of stainless steel Ø100, ¼" male |
| 10-1741/250 | PRESSURE GAUGE 250 PSI/1750 KPA
Double scale 0-250 psi/0-1750 kPa, made of stainless steel Ø100, ¼" male |
| 10-1741/500 | PRESSURE GAUGE 500 PSI/3500 KPA
Double scale 0-500 psi/0-3500 kPa, made of stainless steel Ø100, ¼" male |
| 10-1733 | HY-FLEX JUNCTION
¼"/ ¼" female, for high pressure |
| T-AS18C | THERMOMETER ASTM 18C IP 23C |
| T-AS65C | THERMOMETER ASTM 65C |



VAPOR PRESSURE

RVP - REID

ASTM D323 IP 69 ISO 3007 VAPOR PRESSURE OF PETROLEUM PRODUCTS (REID METHOD)

This test method covers procedures for the determination of vapor pressure (see Note 1) of gasoline, volatile crude oil, and other volatile petroleum products.

Procedure A is applicable to gasoline and other petroleum products with a vapor pressure of less than 1,8 bar/26 psi/180 kPa.

Procedure B may also be applicable to these other materials, but only gasoline was included in the interlaboratory test program to determine the precision of this test method

Procedure C is for materials with a vapor pressure of greater than 1,8 bar/26 psi/180 kPa.

Procedure D for aviation gasoline with a vapor pressure of approximately 0.5 bar/7 psi/50 kPa.

This test method is not applicable to liquefied petroleum gases or fuels containing oxygenated compounds other than methyl t-butyl ether (MTBE).

ASTM D4953 VAPOR PRESSURE OF GASOLINE AND GASOLINE-OXYGENATE BLENDS (DRY METHOD)

This test method covers and is applicable to gasolines and gasoline-oxygenate blends with a vapor pressure range from 35 to 100 kPa (5 to 15 psi)

For a pressure less than 1,8/26/180 bar/psi/kPa. Made of chromium-plated brass consisting of a liquid chamber valveless 1/2" BSP male for coupling with the vapor chamber with two 1/2" BSP female for coupling with the liquid chamber and pressure gauge

Tested at 220 psi (1520 kPa)

1790/ABD REID VAPOR PRESSURE CYLINDER <26



ACCESSORIES ON REQUEST

1770	THERMOSTATIC BATH Stainless steel structure, capacity 90 liters about, insulated interspace. The temperature control is a thermoregulator PID with PT100 probe class A and overtemperature alarm, stainless steel heater, cooling coil, motor stirrer, insulated double wall, safety internal level for low liquid with warning lamp. For 6 reid cylinder Technical specifications: - Temperature: from ambient to 90°C (194°F) ±0.1°C - Bath capacity: 90 liters about - Power supply: 230V ±10% 50/60Hz - Power: 3200W - Dimensions: 54x50x89 cm - Weight: 39 kg
1770/B	AUTOMATIC THERMOSTATIC BATH FOR PROCEDURE "B" Horizontal bath. stainless steel structure. LCD 7" control panel with PID regulation temperature, overtemperature alarm, 3 independent pressure transducer, stainless steel heater, pump stirrer, insulated double wall, safety internal level for low liquid, motor for rotate the cylinders on axis 350° in one direction and then 350° in the opposite direction in repetitive fashion. Included 3x stopper for vapor chamber and 3x quick connection with outage tube. Allows the immersion of 3 cylinders
10-1791	U-TUBE MANOMETER Glass tube fitted on a wood, mercury model, double graduated scale up to 800 mm. Mercury is not included
10-1793/06	PRESSURE GAUGE ISO 0.6 BAR/8.7 PSI Double scale 0-0.6 bar/0-8.7 psi, made of stainless steel Ø100, 1/2" male
10-1793/1	PRESSURE GAUGE ISO 1 BAR/14.5 PSI Double scale 0-1 bar/0-14.5 psi, made of stainless steel Ø100, 1/2" male
10-1793/2.5	PRESSURE GAUGE ISO 2.5 BAR/36.2 PSI Double scale 0-2.5 bar/0-36.2 psi, made of stainless steel Ø100, 1/2" male
10-1793/5	PRESSURE GAUGE ASTM 5 PSI/35 KPA Double scale 0-5 psi/0-35 kPa, made of stainless steel Ø100, 1/2" male
10-1793/15	PRESSURE GAUGE ASTM 15 PSI/100 KPA Double scale 0-15 psi/0-100 kPa, in made of stainless steel Ø100, 1/2" male
10-1793/30	PRESSURE GAUGE ASTM 30 PSI/200 KPA Double scale 0-30 psi/0-200 kPa, made of stainless steel Ø100, 1/2" male

CONSUMABLES x 2 YEARS

15-1792/A	NEOPRENE GASKET CYLINDER, pack of 10 pcs x1
15-1792/B	NEOPRENE GASKET FOR PRESSURE GAUGE, pack of 10 pcs x1

SPARE PARTS

15-1790/A	LIQUID CHAMBER - ONE OPENING <26 For a pressure less than 26 psi (180 kPa). Made of chromium-plated brass consisting of a liquid chamber valveless 1/2" BSP male for coupling with the vapor chamber.
15-1790/B	VAPOR CHAMBER Made of chromium-plated brass consisting of a vapor chamber with two 1/2" BSP female for coupling with the liquid chamber and pressure gauge.
10-1794	SAMPLE CONTAINER Made of brass with double walled and internal weight, ground joint, Ø40 mm head, screwing metal cap
10-1795	SAMPLE TRANSFER CONNECTION For removing liquid from the sample container without interfering with the vapor space.
10-1796	COOLING BATH 0°C For sample containers and the liquid chambers can be completely immersed at temperature between 0 and 1°C (32 and 34°F).
T-AS18C	THERMOMETER ASTM 18C

VAPOR PRESSURE

For a pressure above 26 psi (180 kPa). Made of chromium-plated brass consisting of a liquid chamber with two valves: one valve 1/2" BSP male coupling with vapor chamber and one valve 1/4" BSP male for inlet line and vapor chamber with two 1/2" BSP female for coupling with the liquid chamber and pressure gauge.

Tested at 220 psi (1520 kPa)

1790/C REID VAPOR PRESSURE CYLINDER >26

CONSUMABLES x 2 YEARS

15-1792/A	NEOPRENE GASKET CYLINDER, pack of 10 pcs x1
15-1792/B	NEOPRENE GASKET FOR PRESSURE GAUGE, pack of 10 pcs x1

SPARE PARTS

15-1790/C	LIQUID CHAMBER - TWO OPENING >26 For a pressure above 26 psi (180kPa). Made of chromium-plated brass consisting of a liquid chamber with two valves: one valve 1/2" BSP male coupling with vapor chamber and one valve 1/4" BSP male for inlet line.
15-1790/B	VAPOR CHAMBER Made of chromium-plated brass consisting of a vapor chamber with two 1/2" BSP female for couplin

ACCESSORIES ON REQUEST

1770	THERMOSTATIC BATH Stainless steel structure, capacity 90 liters about, insulated interspace. The temperature control is a thermoregulator PID with PT100 probe class A and overtemperature alarm, stainless steel heater, cooling coil, motor stirrer, insulated double wall, safety internal level for low liquid with warning lamp. For 6 reid cylinder Technical specifications: - Temperature: from ambient to 90°C (194°F) ±0.1°C - Bath capacity: 90 liters about - Power supply: 230V ±10% 50/60Hz - Power: 3200W - Dimensions: 54x50x89 cm - Weight: 39 kg
10-1791	U-TUBE MANOMETER Glass tube fitted on a wood, mercury model, double graduated scale up to 800 mm. Mercury is not included
10-1793/4	PRESSURE GAUGE ISO 4 BAR/58 PSI Double scale 0-4 bar/0-58 psi, made of stainless steel Ø100, 1/2" male
10-1793/6	PRESSURE GAUGE ISO 6 BAR/87 PSI Double scale 0-6 bar/0-87 psi, made of stainless steel Ø100, 1/2" male
10-1793/10	PRESSURE GAUGE ISO 10 BAR/145 PSI Double scale 0-10 bar/0-145 psi, made of stainless steel Ø100, 1/2" male
10-1793/45	PRESSURE GAUGE ASTM 45 PSI/300 KPA Double scale 0-45 psi/0-300 kPa, made of stainless steel Ø100, 1/2" male
10-1793/60	PRESSURE GAUGE ASTM 60 PSI/400 KPA Double scale 0-60 psi/0-400 kPa, made of stainless steel Ø100, 1/2" male
10-1793/100	PRESSURE GAUGE ASTM 100 PSI/700 KPA Double scale 0-100 psi/0-700 kPa, made of stainless steel Ø100, 1/2" male
10-1794	SAMPLE CONTAINER Made of brass with double walled and internal weight, ground joint, Ø40 mm head, screwing metal cap.
10-1795	SAMPLE TRANSFER CONNECTION For removing liquid from the sample container without interfering with the vapor space.
10-1796	COOLING BARTH 0°C For sample containers and the liquid chambers can be completely immersed at temperature between 0 and 1°C (32 and 34°F).
T-AS18C	THERMOMETER ASTM 18C

DEMULSIBILITY AND FOAMING

HERSCHEL

ASTM D1401 ISO 6614 DIN 51599 (obs) WATER SEPARABILITY OF PETROLEUM OILS AND SYNTHETIC FLUIDS

This test method covers measurement of the ability of petroleum oils or synthetic fluids to separate from water. Although developed specifically for steam-turbine oils having viscosities of 28.8–90 mm²/s at 40°C, this test method may be used to test oils of other types having various viscosities and synthetic fluids at other test temperatures. It is recommended, however, that the test temperature be raised to 82 ±1°C when testing products more viscous than 90 mm²/s at 40°C. For higher viscosity oils where there is insufficient mixing of oil and water, Test Method D2711 is recommended.

Borosilicate tank, cover with 4 holes for test cylinder, leakage protection vessel made of tempered glass, supplied with cork disk supporting and stainless steel base, stainless steel heater controlled by a digital thermoregulator PID and probe PT100A, overtemperature alarm, programmable digital timer for duration of the test, motor stirrer for bath, centering for 4 emulsion cylinders, bar supporting the stirrer motor with stop system allowing the exact immersion of the blade agitator, variable speed controller 150 to 1999 rpm, stainless steel blade agitator 19x1.5mm L=120 mm connected to a stainless steel 6 mm shaft.

Technical specifications:

- Temperature: from ambient to 150°C (302°F)
- Stability: ±0.1°C
- Power supply: 230V ±10% 50/60Hz
- Power: 1200W
- Dimensions: 35x35x92 cm
- Weight: 28 kg

1850/MAN MANUAL HERSCHEL

Structure with 3 independent positions and rear illumination, stainless steel heater controlled by a digital thermoregulator PID and probe PT100A, overtemperature alarm, 3x independent variable stirrer motor and is lowered and raised automatically, 3x programmable digital timers for duration of the test, motor stirrer for bath, variable speed controller 150 to 1999 rpm, stainless steel blade agitator 19x1.5mm L=120 mm connected to a stainless steel 6 mm shaft. Max temperature 150°C

1850/SEM SEMI-AUTOMATIC HERSCHEL EMULSIFIER



ACCESSORIES ON REQUEST

10-1851	CYLINDER 100 ml., div.1
T-AS19C	THERMOMETER ASTM 19C
T-AS21C	THERMOMETER ASTM 21C

CONSUMABLES x 2 YEARS

10-1851	CYLINDER x8 100 ml., div.1
---------	-------------------------------

SPARE PARTS

15-1850	STIRRING PADDLE
15-1852	SUPPORT FOR 6 CYLINDER
14-0001	PROBE PT100A
11-1850	HEATER
16-0005	DIGITAL THERMOREGULATOR
15-0003/120	LEVEL SWITCH PPS
15-0015	STATIC RELAY
15-0004	BIPOLAR GREEN SWITCH
15-0005	BIPOLAR YELLOW SWITCH
12-0001	MOTOR STIRRER



DEMULSIBILITY

ASTM D2711 DEMULSIBILITY CHARACTERISTICS OF LUBRICATING OILS

This test method covers the measurement of the ability of oil and water to separate from each other. It is intended for use in testing medium and high-viscosity lubricating oils

3 positions bath, Ø270x450 mm tank, leakage protection vessel made of tempered glass, cover with three 55 mm holes for separatory funnels. Temperature is controlled by a digital thermoregulator PID with overtemperature alarm and probe PT100A, cooling coil for external joint, stirrer motor, safety internal level for low liquid with warning lamp, stainless steel bar supporting the agitator turbine, programmable digital timer for duration of the test, plate base painted with anti-acid epoxy products, 300 to 5,000 rpm turbine agitator electronically regulated and digitally read.

Technical specifications:

- Temperature: from ambient to 90°C (194°F)
- Stability: ±0.1°
- Capacity 23 liters about
- Power supply: 230V ±10% 50/60Hz
- Power: 2200W

1870 DEMULSIBILITY APPARATUS

ACCESSORIES ON REQUEST

- | | |
|---------|--|
| 10-1871 | SEPARATORY FUNNEL
Borosilicate glass Ø54 mm, 500 ml., div.5. |
| T-AS21C | THERMOMETER ASTM 21C |
| 1220 | CENTRIFUGE |
| 10-1222 | BUCKET FOR CONE-SHAPED TUBE, pack of 4 pcs
For 10-1225 and 10-1226, made of aluminum, included Polyurethane support for tube |
| 10-1225 | CENTRIFUGE TUBE CONE-SHAPED, pack of 4 pcs
100 ml, 203 mm, div. from 0 to 0.5:0.05, from 0.5 to 2:0.1, from 2 to 3:0.2, from 3 to 5:0.5, from 5 to 10:1, from 10 to 25:5, from 25 to 100:25 |

CONSUMABLES x 2 YEARS

- | | |
|---------|----------------------|
| 10-1871 | SEPARATORY FUNNEL x2 |
|---------|----------------------|

SPARE PARTS

- | | |
|-------------|---------------------------|
| 15-1872 | STIRRER |
| 15-1873 | SERIES OF STIRRER BEARING |
| 14-0002 | PROBE PT100A |
| 11-0016 | HEATER |
| 16-0005 | DIGITAL THERMOREGULATOR |
| 16-0080 | TIMER |
| 15-0003/120 | LEVEL SWITCH PPS |
| 15-0015 | STATIC RELAY |
| 15-0004 | BIPOLAR GREEN SWITCH |
| 15-0005 | BIPOLAR YELLOW SWITCH |
| 12-0001 | MOTOR STIRRER |



IP 19 DETERMINATION OF DEMULSIBILITY CHARACTERISTICS OF LUBRICATING OIL

This method gives a measure of the ability of the oil to separate from an emulsion. It is commonly applied to turbine oils, but it may be used for other lubricating oils. The test is commonly applied to used turbine oils but since it is sensitive to aging and contamination of the oil, precision will be lower than that stated.

1840 DEMULSIBILITY APPARATUS

Consisting of: a steam generator including: 1 electric-heater units with electronic-power regulators, 1 support boards with ceramic plate with an hole Ø 51 mm, 1 steam generator flask capacity:1 litre, 1 stopper for flask, 1 ventilation tube, 2 steam pipings, 1 hose connection of 2 m, 3 clamps for hose, 1 support rod, 1 boss head, 1 clamp.

An Emulsifying Bath including: 1 tripod stand: Ø 100 mm, 1 support boards made of ceramic glass, 1 glass jar as bath of 3000 ml, 1 cover for bath with stopper, 1 oil test tube made of glass, 1 stopper for oil test tube, 1 steam inlet tube.

A Separating Bath including: 1 electric-heater units with electronic-power regulators, 1 support boards made of cast iron, 1 glass jar of 3000 ml as bath, 1 cover for bath with stopper, 1 steam inlet tube

DEMULSIBILITY AND FOAMING

AIR RELEASE

ASTM D3427 IP 313 ISO 9120 DIN 51381 AIR RELEASE PROPERTIES OF PETROLEUM OILS

This test method covers the ability of turbine, hydraulic, and gear oils to separate entrained air.

Consisting of: structure made in plate painted with epoxy products with upper base for density balance (optional), air pump with heating system controlled by PID digital thermostat and PT100 probe, reducer pressure, manometer, hole for thermometer (optional), test vessel with jacketed sample tube for connection to circulating bath (optional).

Not included: oven, density balance with platinum wire and sinker, circulating bath and thermometer.

Technical specifications:

- Temperature: from ambient to 80°C (176°F)

- Stability: $\pm 0.1^\circ$

- Power supply: 230V $\pm 10\%$ 50/60Hz

- Power: 500W

- Dimensions: 40x35x57 cm

- Weight: 25 kg

1880 AIR RELEASE APPARATUS

ACCESSORIES ON REQUEST

722	CIRCULATING BATH
2470/PS	DENSITY BALANCE
10-1881	PLATINUM WIRE
10-1882/10	SINKER 10 ml
10-1882/5	SINKER 5 ml
10-0332	DIGITAL STOPWATCH 7 digit LCD, max.10 hours, 1/100 sec, digit h=8 mm
T-AS12C	THERMOMETER ASTM 12C

SPARE PARTS

15-1881	TEST VESSEL
15-1881/T	JACKETED SAMPLE TUBE In and out water connection
15-1881/F	AIR SYSTEM HEAD With an air inlet capillary, baffle plate, and air outlet tube
15-1882	PRESSURE GAUGE
15-1883	SILICONE TUBE, pack of 5 m



DEMULSIBILITY AND FOAMING

FOAMING

ASTM D892 (I, II, III) IP 146 ISO 6247 DIN 51566 FOAMING CHARACTERISTICS OF LUBRICATING OILS

This test method covers the determination of the foaming characteristics of lubricating oils at 24°C (75.2°F) and 93.5°C (200.3°F). Means of empirically rating the foaming tendency and the stability of the foam are described

ASTM D6082 (IV) HIGH TEMPERATURE FOAMING CHARACTERISTICS OF LUBRICATING OILS

This test method describes the procedure for determining the foaming characteristics of lubricating oils (specifically transmission fluid and motor oil) at 150°C (302°F)

Consists of a tank fitted with cover with two hole, which allows two cylinders to get through, and a cooling coil, leakage protection vessel made of tempered glass supplied with cork disk supporting and stainless steel base. Stainless steel control box on the cover, temperature controlled by digital thermoregulator PID with PT100 probe class A and overtemperature alarm, stainless steel heater, cooling coil for improved control near to ambient temperature, motor stirrer, safety internal level for low liquid with warning lamp. Plate base painted with anti-acid epoxy products with rack for 2 flowmeters 25-250 ml/min. Complete with: 2x flowmeters, 2x graduated cylinders, 2x diffuser ball-shape, 2x rubber plug and diffuser tubes.

Technical specifications:

- Temperature: from ambient to +150°C (302°F)
- Stability: ±0.1°C
- Capacity: about 23 l
- Power supply: 230V ±10% 50/60Hz
- Power: 2200W

1900/2 FOAMING BATH LIQUID MODEL (2 POSITIONS)

Consists of two tanks, one for working 24°C (75.2°F) and one for working up to 150°C (302°F), fitted with cover with two hole each, which allows two cylinders to get through, leakage protection vessel made of tempered glass supplied with cork disk supporting and stainless steel base. Stainless steel control box on the cover, temperature controlled by digital thermoregulator PID with PT100 probe class A and overtemperature alarm, stainless steel heater, cooling coil for improved control near to ambient temperature, motor stirrer, safety internal level for low liquid with warning lamp. Plate base painted with anti-acid epoxy products, rack for 4 flowmeters 25-250 ml/min. Complete with: 4x flowmeters, 4x graduated cylinders, 4x diffuser ball-shape, 4x rubber plug and diffuser tubes.

Technical specifications:

- Temperature: from ambient to +150°C (302°F)
- Stability: ±0.1°C
- Capacity: about 23+23 l
- Power supply: 230V ±10% 50/60Hz
- Power: 1200+2200 W
- Dimensions: 76x50x77 cm
- Weight: 65 kg.

1900/4 FOAMING BATH LIQUID MODEL (4 POSITIONS)

CONSUMABLES x 2 YEARS

- | | |
|---------|---|
| 15-1904 | GRADUATED CYLINDER, 1000 ml. x2 |
| 15-1903 | DIFFUSER BALL-SHAPE x2
Made of alundum |

SPARE PARTS

- | | |
|-------------|-------------------------------|
| 15-1902 | DIFFUSER TUBE, pack of 2 pcs |
| 15-1905 | RUBBER STOPPER, pack of 2 pcs |
| 15-1906 | FLOWMETER |
| 14-0002 | PROBE PT100A |
| 11-0012/19 | HEATER (for bath 24°C) |
| 11-0016 | HEATER |
| 15-0003/120 | LEVEL SWITCH |
| 16-0005 | DIGITAL THERMOREGULATOR |
| 15-0015 | STATIC RELAY |
| 15-0004 | BIPOLAR GREEN SWITCH |
| 15-0005 | BIPOLAR YELLOW SWITCH |
| 12-0001 | MOTOR STIRRER |

Consisting of stainless steel tank 2 positions with system for connection of an external chilled mixture; insulate interspace with frontal tempered window and light. Temperature controlled by a digital thermoregulator PID with PT100 probe class A and overtemperature alarm, rack for 2 flowmeters 25-250 ml/min. Complete with: 2x flowmeters, 2x graduate cylinders, 2x diffuser balls-shape, 2x rubber plug and diffuser tubes.

Technical specifications:

- Temperature: from ambient to +150°C (302°F)
- Stability: ±0,5°C
- Power supply: 230V 50/60Hz
- Power: 2200W

1900/AIR/2 FOAMING BATH AIR MODEL (2 POSITIONS)

Consisting of 2 stainless steel tanks, one for working 24°C (75,2°F) with system for connection of an external chilled mixture and one for working up to 150°C (302°F), each with 2 positions; insulate interspace with frontal tempered window and light. Temperature controlled by a digital thermoregulator PID with PT100 probe class A and overtemperature alarm, rack for 4 flowmeters 25-250 ml/min.

Complete with: 4 x flowmeters, 4 x graduate cylinders, 4 x diffuser balls-shape, 4 x rubber plug and diffuser tubes.

Technical specifications:

- Temperature: from ambient to +150°C (302°F)
- Stability: ±0,5°C
- Power supply: 230V 50/60Hz
- Power: 2200W

1900/AIR/4 FOAMING BATH AIR MODEL (4 POSITIONS)

ACCESSORIES ON REQUEST

- | | |
|-----------|---|
| 10-1901 | CERTIFIED DIFFUSER BALL-SHAPE
Made of Alundum |
| 10-1904 | DIFFUSER CYLINDRICAL-SHAPE
Made of stainless steel |
| 10-1904/C | CERTIFIED DIFFUSER CYLINDRICAL-SHAPE
Made of stainless steel |
| 10-1905 | DRYING TOWER, 300 mm
20-mm layer of cotton, 180-mm layer of indicating desiccant, 20-mm layer of cotton |
| 10-1905/V | EMPTY DRYING TOWER, 300 mm |
| 10-1906 | AIR VOLUME METER
1-60 l/h |
| 10-1907 | GAS VOLUME METER
5-360 l/h |
| 10-1908 | DIFFUSER TEST APPARATUS
For maximum pore diameter and permeability diffusers.
Consisting of: U-tube manometer, gas volume meter 5-360 l/h, 500 ml vacuum flask, 250 ml cylinder, needle valve |
| 2460/2180 | PUMP |
| 10-0332 | DIGITAL STOPWATCH
7 digit LCD, max.10 hours, 1/100 sec, digit h=8 mm |
| T-AS12C | THERMOMETER ASTM 12C IP 64C |
| T-AS41C | THERMOMETER ASTM 41C IP 81C |

DEMULSIBILITY AND FOAMING



1900/4

2014

1900/AIR/4

2016

COOLANTS

ASTM D1881 FOAMING TENDENCIES OF ENGINE COOLANTS IN GLASSWARE

This test method covers a simple glassware test for evaluating the tendency of engine coolants to foam under laboratory-controlled-conditions of aeration and temperature.

Consisting of a small electric heater, borosilicate glass 4 l, 500 ml graduated cylinder with metal ballast on the bottom, a porous stone with a diffuser ball-shape, a 3-way stopcock, blowing pump and flowmeter 60 l/h

Technical specifications:

- Temperature: from ambient to 100°C (212°F)
- Stability: $\pm 1^\circ\text{C}$
- Power supply: 230V $\pm 10\%$ 50/60Hz
- Power: 700W

1915 COOLANTS FOAMING APPARATUS



1915

2013

ACCESSORIES ON REQUEST

- | | |
|-----------|--|
| 10-1901 | CERTIFIED DIFFUSER BALL-SHAPE
Made of Alundum |
| 10-1905 | DRYING TOWER, 300 mm
20-mm layer of cotton, 180-mm layer of
indicating desiccant, 20-mm layer of cotton |
| 10-1905/V | EMPTY DRYING TOWER, 300 mm |
| 10-1908 | DIFFUSER TEST APPARATUS
For maximum pore diameter and permeability
diffusers.
Consisting of: U-tube manometer, gas volume
meter 5-360 l/h, 500 ml vacuum flask, 250 ml
cylinder, needle valve |
| 10-0332 | DIGITAL STOPWATCH
7 digit LCD, max.10 hours, 1/100 sec,
digit h=8 mm |
| T-AS1C | THERMOMETER ASTM 1C |

CONSUMABLES x 2 YEARS

- | | |
|-----------|---|
| 15-1915/C | GRADUATED CYLINDER, 500 ml. x2 |
| 15-1903 | DIFFUSER BALL-SHAPE x2
Made of alundum |

SPARE PARTS

- | | |
|-----------|---------------------------------|
| 15-1902 | DIFFUSER TUBE, pack of 2 pcs |
| 15-1915/F | FLOWMETER |
| 15-1915/T | SILICONE STOPPER, pack of 2 pcs |
| 15-1915/J | JAR, 4 l |
| 15-1915/R | 3-WAY STOPCOCKE |

GREASES

SEPARATION

ASTM D1742 OIL SEPARATION FROM LUBRICATING GREASE DURING STORAGE

This test method covers the determination of the tendency of a lubricating grease to separate oil during storage in both normally filled and partially filled containers

Painted metallic structure with stainless steel level at 4 stand-alone places, inlet stabilizing reducer for low pressures, control manometer for cells, 4 pin valve, air pump, quick connection for additional external source air.

Technical specifications:

- Delivery: 6 l/min
- Operating pressure: 2.4 bar
- Power supply: 230V ±10% 50Hz
- Power: 60W
- Dimensions: 44x35x18 cm
- Weight: 6 kg

2030 GREASES SEPARATION APPARATUS

CONSUMABLES x 2 YEARS

- | | |
|-----------|---|
| 15-2032 | O-RING |
| 15-2031/A | SIEVE STRAINER FOR TEST CELL TYPE "A"
Made of stainless steel 75 µm (200 mesh) |
| 15-2031/B | SIEVE STRAINER FOR TEST CELL TYPE "B"
Made of stainless steel 75 µm (200 mesh) |

SPARE PARTS

- | | |
|-----------|------------------|
| 2460/2030 | AIR PUMP |
| 15-2031 | REDUCER PRESSURE |
| 15-2034 | MANOMETER |

ACCESSORIES ON REQUEST

- | | |
|------------|--|
| 10-2031/A | TEST CELL TYPE "A"
Made of chrome plated copper with a 75 µm (200 mesh) stainless steel sieve strainer for supporting the grease. |
| 10-2031/B | TEST CELL TYPE "B"
Made of aluminum with a 75 µm (200 mesh) stainless steel sieve strainer for supporting the grease. |
| 10-2032 | BEAKER 20 ML, pack of 4 pcs |
| 2470/EL600 | ELECTRONIC BALANCE
Range 600 g., readout 0.01, pan Ø130 |



2030 + 10-2031/A + 10-2031/B

2013

GREASES

SEPARATION

IP 121 DIN 51817 DETERMINATION OF OIL SEPARATION FROM LUBRICATING GREASE - PRESSURE FILTRATION METHOD

Consisting of: a brass separation cup having a cone of stainless steel woven wire; cloth 240 mesh aperture 63 µm, wire diameter 40 µm on the bottom, 100 g metal weight and oil cup.

2035/IP GREASES SEPARATION APPARATUS IP

CONSUMABLES x 2 YEARS

15-2035/IP/A CONE WITH WOVEN WIRE x2

SPARE PARTS

15-2035/IP/B OIL CUP
15-2035/IP/C METAL WEIGHT, 100 g



ASTM D6184 FTM 791-321 OIL SEPARATION FROM LUBRICATING GREASE (CONICAL SIEVE METHOD)

This test method covers the determination of the tendency of lubricating grease to separate oil at an elevated temperature. This test method shall be conducted at 100°C (212°F) for 30 h unless other conditions are required by the grease specification

Consisting of: a stainless steel cone-shaped sieve 60 mesh, a 200 ml tall form beaker, cover fitted with gasket and crane hook for the cone.

2035/ASTM GREASES SEPARATION APPARATUS ASTM

CONSUMABLES x 2 YEARS

15-2035/ASTM/A CONE WITH FILTER x2

SPARE PARTS

15-2035/ASTM/B BEAKER, 200 ml
15-2035/ASTM/C COVER



GREASES

EVAPORATION

ASTM D972 IP 183 EVAPORATION LOSS OF LUBRICATING GREASES AND OILS

his test method covers the determination of the loss in mass by evaporation of lubricating greases and oils for applications where evaporation loss is a factor. Evaporation loss data can be obtained at any temperature in the range from 100 to 150°C (210 to 300°F)

ASTM D2878 ESTIMATING APPARENT VAPOR PRESSURES AND MOLECULAR WEIGHTS OF LUBRICATING OILS

This test method covers a calculation procedure for converting data obtained by Test Method D972 to apparent vapor pressures and molecular weights. It has been demonstrated to be applicable to petroleum-based and synthetic ester lubricating oils, at temperatures of 395 to 535K (250 to 500°F). However, its applicability to lubricating greases has not been established.

Stainless steel oil bath with insulated double wall, cover with two holes for evaporation cells, two flowmeters. stainless steel control box on the cover, temperature controlled by digital thermoregulator PID with PT100 probe class A and overtemperature alarm, stainless steel heater, motor stirrer, safety internal level for low liquid with warning lamp.

Technical specifications:

- Temperature: from ambient to 180°C (356°F)
- Stability: ±0.3°C
- Power supply: 230V ±10% 50/60Hz
- Power: 3200W
- Dimensions: 58x46x54 cm
- Weight: 27 kg

2050 EVAPORATION GREASES BATH

ACCESSORIES ON REQUEST

10-2050	EVAPORATION CELL Stainless steel cylindrical body with neck flange and three cell connections for the tight cover closure, double bottom with 3.17 mm orifice, brass pre-heating coil with cell connections and air inlet tube, stainless steel cover with PTFE gaskets fitted with 3 blocking screws. Central air flow-off connected to an 18/8 stainless steel tube with lower threaded junction for connection with the test cup.
10-2051/G	GREASE SAMPLE CUP For greases
10-2051/O	OIL SAMPLE CUP For lubricating oil
10-2052	FILTERING PIPE Ø25x400 mm, with glass wool
2460/2180	AIR PUMP
2470/EL600	ELECTRONIC BALANCE Range 600 g., readout 0.01, pan Ø130
T-AS22C	THERMOMETER ASTM 22C IP 24C
T-AS67C	THERMOMETER ASTM 67C

CONSUMABLES x 2 YEARS

15-2051	PTFE GASKET, pack of 10 pcs
---------	-----------------------------

SPARE PARTS

15-2052	FLOWMETER
14-0001	PROBE PT100A
11-0012/19	HEATER
15-0003/200	LEVEL SWITCHC
16-0005	DIGITAL THERMOREGULATOR
15-0015	STATIC RELAY
15-0004	BIPOLAR GREEN SWITCH
12-0001	MOTOR STIRRER



GREASES

ASTM D2595 EVAPORATION LOSS OF LUBRICATING GREASES OVER WIDE-TEMPERATURE RANGE

This test method covers the determination of evaporation loss of lubricating greases at temperatures between 93 and 316°C (200 and 600°F). This test method is intended to augment Test Method D972, which is limited to 149°C (300°F)

Dry bath with aluminum block and stainless steel structure, cover, cover with two holes for evaporation cells, two flowmeters. stainless steel control box on the cover, temperature controlled by digital thermoregulator PID with PT100 probe class A and overtemperature alarm, stainless steel heater.

Included two digital thermometer with two thermocouple for connection to evaporation cell.

Technical specifications:

Temperature: from ambient to 320°C (608°F)

• Stability: $\pm 1^{\circ}\text{C}$

• Power supply: 230V $\pm 10\%$ 50/60Hz

ACCESSORIES ON REQUEST

10-2055	EVAPORATION CELL Made of stainless steel AISI 304, consisting of a sample cup, hood, cover and eduction tube
10-2052	FILTERING PIPE $\varnothing 25 \times 400$ mm, with glass woo
2460/2180	AIR PUMP
2470/EL600	ELECTRONIC BALANCE Range 600 g., readout 0.01, pan $\varnothing 130$
T-AS3C	THERMOMETER ASTM 3C IP73C

2050/S

EVAPORATION GREASES DRY BATH

CONSUMABLES x 2 YEARS

15-2055	PTFE GASKET, pack of 10 pcs
---------	-----------------------------

SPARE PARTS

15-2052	FLOWMETER
15-2056	THERMOCOUPLE K
14-0001/A	PROBE PT100A
11-2050/S	HEATER
16-0005	DIGITAL THERMOREGULATOR
15-0015	STATIC RELAY
15-0004	BIPOLAR GREEN SWITCH



GREASES

WHEEL BEARING GREASE

ASTM D1263 (obs) LEAKAGE TENDENCIES OF AUTOMOTIVE WHEEL BEARING GREASES

This test method covers the evaluation of the leakage tendencies of wheel bearing greases when tested under prescribed laboratory conditions

Thermostatic cabin equipped with thermic insulator, rotating pivot with spindle, electric heating with digital thermoregulator and probe PT100A, digital timer, motor with pulley and V-type belt controlling the hub rotation. The hub carries bearings with a pulley suitable for 660 rpm speed. Two bearings (tapered roller) Timken 09074 and 15118, grease collection tank.

Technical specifications:

- Temperature: from ambient to 150°C (302°F)
- Stability: $\pm 1^\circ\text{C}$
- Power supply: 230V $\pm 10\%$ 50/60Hz
- Power: 1400W

2580 WHEEL BEARING APPARATUS

ACCESSORIES ON REQUEST

2470/BC8000	ELECTRONIC BALANCE
	Range 8000 g., readout 0.1, pan 175x200 mm
10-2054/A	TORQUE WRENCH
	For 6.8 Nm
T-AS7C	THERMOMETER ASTM 7C IP 5C

CONSUMABLES x 2 YEARS

15-2055/A	BEARING (TAPERED ROLLER) 09074
	Timken 09074=No.09196
15-2055/B	BEARING (TAPERED ROLLER) 15118
	Timken 15118=No.15250

SPARE PARTS

15-2581	V-BELT DRIVE
12-2582	MOTOR
14-0001/A	PROBE PT100A
11-0990/3	HEATER
16-0080	DIGITAL TIMER
16-0005	DIGITAL THERMOREGULATOR
15-0015	STATIC RELAY
15-0004	BIPOLAR GREEN SWITCH
15-0005	BIPOLAR YELLOW SWITCH



2580

2011

WATER WASHOUT

ASTM D1264 IP 215 ISO 11009 DIN 51807-2 DETERMINING THE WATER WASHOUT CHARACTERISTICS OF LUBRICATING GREASES

This test method covers the evaluation of the resistance of a lubricating grease to washout by water from a bearing, when tested at 38 and 79°C (100 and 175°F) under the prescribed laboratory conditions. It is not to be considered the equivalent of service evaluation tests. This test method may not be suitable for some greases containing highly volatile components

Made of stainless steel with of a thermostatic cabin with electric stainless steel heater controlled by a digital thermoregulator, digital timer, two bearings type 6204, a thermometer determining water temperature in the cabin, an electric motor with direct coupling to the pump and drive belt for the shaft pulley 600 rpm, a bearings block, a flowmeter measuring water delivery, delivery and back-flow gates with by-pass and regulator valves.

Technical specifications:

- Temperature: from ambient to 90°C (194°F)
- Stability: ±1°C
- Power supply: 230V ±10% 50/60Hz
- Power: 900W
- Dimensions: 58x39x65 cm
- Weight: 39 kg

2590 WATER WASHOUT APPARATUS

ACCESSORIES ON REQUEST

2470/EL200	ELECTRONIC BALANCE Range 200 g., readout 0.01, pan Ø130
T-AS34C	THERMOMETER ASTM 34C IP 21C

CONSUMABLES x 2 YEARS

15-2591	BEARING x2
---------	------------

SPARE PARTS

15-2590/FL	FLOWMETER
15-2590/CIN	DRIVE BELT
11-2590	HEATER
14-0006	PROBE PT100A
16-0080	DIGITAL TIMER
16-0005	THERMOREGULATOR
15-0015	STATIC RELAY
15-0004	BIPOLAR GREEN SWITCH
15-0005	BIPOLAR YELLOW SWITCH
15-2460/2590	PUMP
12-2590	MOTOR



2590

2012

GREASES

CORROSION

ASTM D1743 DETERMINING CORROSION PREVENTIVE PROPERTIES OF LUBRICATING GREASES

This test method covers the determination of the corrosion preventive properties of greases using grease-lubricated tapered roller bearings stored under wet conditions. This test method is based on CRC Technique L 412 that shows correlations between laboratory results and service for grease lubricated aircraft wheel bearings

ASTM D4950 STANDARD CLASSIFICATION AND SPECIFICATION FOR AUTOMOTIVE SERVICE GREASES

This instrument it's used to determine the anti-corrosive properties of the grease-lubricated bearings using fat stored in wet conditions.

The instrument consists of a head mounted on the rotating assembly to 1750 rpm a workpiece mounted on a controller with built-in digital timer, bearing Timken LM11949 and LM 11910 and bearing assembly that would support the blocking test bearing.

Technical specifications:

- Power supply: 230V ±10% 50Hz

2570/P CORROSION PREVENTIVE PROPERTIES APPARATUS (MAIN PROCEDURE)



ACCESSORIES ON REQUEST

10-2571	BEARING ASSEMBLY Consisting of a upper and lower plastic collar, a metal screw and a plastic collar for the cup
10-2574	SIRYNGE 100 ml, needle L=100 mm
10-2575	PLIER
10-2573	PLASTIC JAR, pack of 10 pcs
10-0332	DIGITAL STOPWATCH 7 digit LCD, max.10 hours, 1/100 sec, digit h=8 mm

CONSUMABLES x 2 YEARS

15-2574/S	SYRINGE x4
15-2574/A	NEEDLE x4

SPARE PARTS

15-2571	INTERNAL O-RING VITON, pack of 10 pcs
15-2066	EXTERNAL O-RING VITON, pack of 10 pcs
15-2572	BEARING HOLDER

Consists of a group rotating at 1.750 rpm mounted on a bed-plate, a calibrated thrust device with spring for placing the bearing against the rotating support. Mechanical device for the test grease inlet onto the bearing, bearings Timken LM11949 and LM 11910

- Power supply: 230V ±10% 50Hz

2570/A CORROSION PREVENTIVE PROPERTIES APPARATUS (ALTERNATE PROCEDURE)

ACCESSORIES ON REQUEST

10-2575	PLIER
10-2576	GLASS JAR With cover



GREASES

DROPPING POINT

ASTM D566 IP 132 ISO 2176 DIN 51801-1 DROPPING POINT OF LUBRICATING GREASE

This test method covers the determination of the dropping point of lubricating grease.

This test method is not recommended for use at bath temperatures above 288°C (550°F). For higher temperatures Test Method D2265 should be used.

ASTM D4950 STANDARD CLASSIFICATION AND SPECIFICATION FOR AUTOMOTIVE SERVICE GREASES

Consists of a chromium-plated brass cup, test tube with projection cap and cork ring, thermometer depth gage, cup plug gage, cover of anticorodal, a polished metal rod Ø1.5x150mm dia., 400ml beaker, heating device unit with motor stirrer.

Technical specifications:

- Temperature: from ambient to 290°C (554°F)
- Power supply: 230V ±10% 50/60Hz
- Power: 700W
- Dimensions: 18x21x52 cm
- Weight: 3 kg

2110 DROPPING POINT



2110 + T-AS2C

2010

ACCESSORIES ON REQUEST

T-AS2C THERMOMETER ASTM 2C IP 62C x2

CONSUMABLES x 2 YEARS

15-2113 GREASE CUP x4
A chromium-plated brass
15-2114 TEST TUBE x2
Ø12x100 mm inside, provided with three indentations

SPARE PARTS

15-2111 POLISHED METAL ROD
Ø1.5x150 mm
15-2112 THERMOMETER DEPTH GAGE
A chromium-plated brass
15-2115 CUP PLUG GAGE
15-2116 SERIES OF CORK FOR THERMOMETER
Cork for vent and cork ring guide
15-2118 BEAKER, 400 ml
11-0022 HEATER
17-0003 TRANSFORMER
15-0004 BIPOLAR GREEN SWITCH
15-0005 BIPOLAR YELLOW SWITCH
15-0110 ELECTRONIC REGULATOR
12-0002 MOTOR STIRRER

GREASES

ASTM D2265 DIN 51825 ISO 6299 DROPPING POINT OF LUBRICATING GREASE OVER WIDE TEMPERATURE RANGE

Composed by a furnace to aluminum block to 6 places, structure in stainless steel, insulating thermal; in the block 6 vertical holes are systematized for the support of the pipes of test while in the back part 6 horizontal holes for the observation with a light cold lamp for the illumination of the zone in correspondence of the cap of test. The lamp is assembled with a reflector in the superior part. The control of the temperature is effected by a digital thermoregulator PID with over-temperature alarm and probe PT100A. Supplied with: 6 grease cup, 6 test tube, 6 thermometer clamp, 6 upper bushing, 6 lower bushing, 6 bushing support ring, 6 thermometer depth gage, 6 cup support, 6 metal rod $\varnothing 1.5 \times 150$ mm, and one cup plug gage

Technical specifications:

- Temperature: from ambient to 400°C (752°F)
- Stability: $\pm 0.5^\circ\text{C}$
- Power supply: 230V $\pm 10\%$ 50/60Hz
- Power: 800W
- Dimensions: 36x16x30 cm

2140 DROPPING POINT HIGH TEMPERATURE



2140 + T-AS3C + T-AS11C

2004

ACCESSORIES ON REQUEST

T-AS3C	THERMOMETER ASTM 3C IP73C x6 For grease cup (6 thermometers request for working)
T-AS11C	THERMOMETER ASTM 11C IP 28C For aluminum block

CONSUMABLES x 2 YEARS

15-2113	GREASE CUP x6 A chromium-plated brass
15-2141	TEST TUBE x6

SPARE PARTS

15-2111	METAL ROD $\varnothing 1.5 \times 150$ mm
15-2112	THERMOMETER DEPTH GAGE A chromium-plated brass
15-2115	CUP PLUG GAGE
15-2142	THERMOMETER CLAMP
15-2143	UPPER BUSHING
15-2144	LOWER BUSHING
15-2145	BUSHING SUPPORT RING
15-2146	CUP SUPPORT
15-2147	LAMP
11-2140	HEATER
14-0006	PROBE PT100A
16-0080	DIGITAL TIMER
16-0005	THERMOREGULATOR
15-0015	STATIC RELAY
15-0004	BIPOLAR GREEN SWITCH
15-0005	BIPOLAR YELLOW SWITCH

GREASES

IP 31 (obs) IP 371 DROP POINT OF PETROLATUM

Consisting of: a chromium-plated brass cup, a Ø40x240 mm test tube, a cap, a 400 ml beaker, an anticorrosive cover, heating device unit and motor stirrer

Technical specifications:

- Temperature: from ambient to 150°C (302°F)
- Stability: 2±°C
- Power supply: 230V ±10% 50/60Hz
- Power: 700W

2120 DROP POINT PETROLATUM

ACCESSORIES ON REQUEST

T-IP40C	THERMOMETER IP 40C
T-IP41C	THERMOMETER IP 41C

CONSUMABLES x 2 YEARS

15-2123	CUP
---------	-----

SPARE PARTS

15-2125	TEST TUBE
15-2118	BEAKER, 400 ml
11-0022	HEATER
17-0003	TRANSFORMER
15-0004	BIPOLAR GREEN SWITCH
15-0005	BIPOLAR YELLOW SWITCH
15-0110	ELECTRONIC REGULATOR
12-0002	MOTOR STIRRER

DIN 51801-2 (obs) DETERMINATION OF DROPPING POINT UBBELOHDE METHOD FOR BITUMINOUS BINDERS

Procedura per determinare la temperatura alla quale i grassi passano da uno stato semisolido ad uno liquido.

Consisting of: a chromium-plated brass cup, a Ø40x240 mm test tube, a cap, a 1000 ml beaker, an anticorrosive cover, heating device unit and motor stirrer

Technical specifications:

- Temperature: from ambient to 150°C (302°F)
- Stability: 2±°C
- Power supply: 230V ±10% 50/60Hz
- Power: 700W

2130 DROPPING POINT UBBELHODE

ACCESSORIES ON REQUEST

T-2132/A	THERMOMETER UBBELOHDE 0° +110°C, div.1°, i.t.
T-2132/B	THERMOMETER UBBELOHDE 100° +230°C, div.1°, i.t.

CONSUMABLES x 2 YEARS

15-2123	CUP
---------	-----

SPARE PARTS

15-2125	TEST TUBE
15-2131	BEAKER, 1000 ml
11-0022	HEATER
17-0003	TRANSFORMER
15-0004	BIPOLAR GREEN SWITCH
15-0005	BIPOLAR YELLOW SWITCH
15-0110	ELECTRONIC REGULATOR
12-0002	MOTOR STIRRER

SAYBOLT CHROMOMETER

ASTM D156 DIN 51411 SAYBOLT COLOR OF PETROLEUM PRODUCTS (SAYBOLT CHROMOMETER METHOD)

This test method covers the determination of the color of refined oils such as undyed motor and aviation gasoline, jet propulsion fuels, naphthas and kerosine, and, in addition, petroleum waxes and pharmaceutical white oils

Black structure supporting two glass tubes one of which graduated, optical glass disc, no.3 Whole color standard and no.1 Half color standard, petcock and mirror located on a base, prismatic eyepiece

2080 SAYBOLT CHROMOMETER

Model for wax with heater back on the tubes and electronic regulator device.

2080/P HEATED SAYBOLT CHROMOMETER

Technical specifications:

- Power supply: 230V ±10% 50/60Hz

ACCESSORIES ON REQUEST

10-2080 "DAYLIGHT" LAMP
Base with orientable support, 60W 230V ±10%.

CONSUMABLES x 2 YEARS

15-2087 GASKET FOR TUBE, pack of 10 pcs x1

SPARE PARTS

15-2081 DAYLIGHT FILTER
15-2082 LAMP 60W 230V ±10%, pack of 3 pcs
15-2083 OPTICAL VIEWER
15-2083/O PRISMS
15-2084 GRADUATED TUBE
15-2084/M GRADUATED TUBE
Mounting on metallic support with drain valve
15-2085 DRAIN VALVE
15-2086 PLAIN TUBE
15-2086/M PLAIN TUBE
Mounting on metallic support
15-2088 ONE-HALF COLOR STANDARD
15-2089 WHOLE COLOR STANDARD, pack of 3 pcs



2080 + 10-2080

2012

COLOR AND WAX

MELTING POINT

ASTM D87 IP 55 ISO 3841 MELTING POINT OF PETROLEUM WAX (COOLING CURVE)

This test method covers the determination of the melting point (cooling curve) of petroleum wax. It is unsuitable for waxes of the petrolatum group, microcrystalline waxes, or blends of such waxes with paraffin wax or scale wax.

Consisting of: air bath with brass cylinder Ø51x114 mm for hold the test tube firmly in a vertical position in the center of the air bath, test tube Ø25x100 mm with reference line for sample filling at 51 mm above the bottom and a reference line for positioning of the bottom of the thermometer at 10 mm above the bottom, a chromium-plated metal water bath Ø130x152 mm. Complete of cork

2090 WAX MELTING POINT APPARATUS



ACCESSORIES ON REQUEST

10-0332	DIGITAL STOPWATCH 7 digit LCD, max.10 hours, 1/100 sec, digit h=8 mm
T-AS14C	THERMOMETER ASTM 14C IP 17C For the sample
T-AS34C	THERMOMETER ASTM 34C IP 21C For the water bath

CONSUMABLES x 2 YEARS

15-2091	TEST TUBE, pack of 5 pcs x2
---------	-----------------------------

SPARE PARTS

15-2092	SERIES OF CORK One for test tube, one for water bath, one for thermometer sample and one for thermometer water bath.
---------	---

DROP MELTING POINT

ASTM D127 IP 133 DROP MELTING POINT OF PETROLEUM WAX, INCLUDING PETROLATUM

This test method covers the determination of the drop melting point of petroleum wax. It is used primarily for petrolatums and other microcrystalline wax

Consisting of: electric heater, 1500 ml glass jar, test tube Ø25x150 mm, two stoppers in corks for test tubes and one in PVC for the glass jar.

Technical specifications:

- Power supply: 230V ±10% 50/60Hz
- Power: 700W
- Dimensions: 26x26x35 cm
- Weight: 4 kg.

2100 DROP MELTING POINT APPARATUS



ACCESSORIES ON REQUEST

T-AS61C	THERMOMETER ASTM 61C IP 63C For the sample
T-AS34C	THERMOMETER ASTM 34C IP 21C For the water bath

CONSUMABLES x 2 YEARS

10-1441/D	TEST TUBE, pack of 10 pcs x1
-----------	------------------------------

SPARE PARTS

15-2102	BEAKER, 1500 ml
15-2103	SERIES OF CORK Two for the test tube
15-2104	PVC COVER With thermometer collar
11-0022	HEATER
15-0004	BIPOLAR GREEN SWITCH
15-0110	ELECTRONIC REGULATOR

OIL CONTENT

ASTM D721 IP 158 ISO 2908 DIN 51571 OIL CONTENT OF PETROLEUM WAXES

This test method covers the determination of oil in petroleum waxes having a congealing point of 30°C (86°F) or higher as determined in accordance with Test Method D938, and containing not more than 15 % of oil.

ASTM D3235 DIN 51572 SOLVENT EXTRACTABLES IN PETROLEUM WAXES

Consisting of a 3 positions cooling bath made of stainless steel with internal tank with cooling coil and external sockets for cooling unit, insulated double wall, springs climp for the filter stick assembly.

Thermostatically heater evaporation cabinet made of stainless steel by PID digital regulator with PT100A probe, 4 positions for weighing bottles, double bottom perforated, air inlet tube, heater, glass door, manifold assembly is adjustable for positioning of 4 jets at the correct heigh.

Technical specifications:

- Temperature: from ambient to 50°C (122°F)
- Stability: ±0.5°C
- Power supply: 230V ±10% 50/60Hz
- Power: 50W

2180 OIL CONTENT OF PETROLEUM WAXES APAPRATUS

ACCESSORIES ON REQUEST

10-2181	FILTER STICK ASSEMBLY Consisting of a 10 mm diameter sintered glass filter stick of 10-15 µm maximum pore and test tube Ø25x180 mm
10-2182	AIR PRESSURE REGULATOR Consisting of a 250 ml glass cylinder and a T-tube held in the cylinder by means of a rubber stopper". Without mercury and cotton..
10-2183	FLOWMETER 100-1100 l/h
10-2185	WEIGHING BOTTLES 15 ml, pack of 4 pcs Made of glass, with stopper
10-2186	DRYING TOWER, 200 mm
2460/2180	AIR PUMP
2470/BCA200	ANALYTICAL BALANCE Range 220 g., readout 0.0001, pan Ø80
T-AS71C	THERMOMETER ASTM 71C IP 72C

CONSUMABLES x 2 YEARS

10-2185	MWEIGHING BOTTLES 15 ml, pack of 4 pcs x2
---------	---

SPARE PARTS

15-2181/C	AIR INLET TUBE WITH FILTER
15-2181/T	TEST TUBE
11-2180	HEATER
14-0001	PROBE PT100A
16-0005	THERMOREGULATOR
15-0015	STATIC RELAY
15-0004	BIPOLAR GREEN SWITCH



2180 + 10-2181+ 10-2185

2015

GUM CONTENT IN FUELS

ASTM D381 IP 131 IP 540 EN 26246 (obs) ISO 6246 DIN 51784 GUM CONTENT IN FUELS BY JET EVAPORATION

This test method covers the determination of the existent gum content of aviation fuels, and the gum content of motor gasolines or other volatile distillates in their finished form, (including those containing alcohol and ether type oxygenates and deposit control additives see Note 7 for additional information) at the time of test.

5 concentric pre-heating coils with 5 wells connected to the central collector with socket for steam measurer, 5 mobile jets, insulated air gap. Built-in steam overheater with regulator and condensate discharge valves. Heating and overheater are controlled by a digital thermoregulator PID with overtemperature alarm. The bath is fitted with a flowmeter 700-6500 ml/s wrapped in a protection covering, steam flowmetric manometer. The overheater for steam can be disconnect.

Technical specifications:

- Temperature: from ambient to 250°C (482°F)
- Stability: ±3°C
- Power supply: 230V ±10% 50/60Hz
- Power: 3500W
- Dimensions: 75x52x90 cm
- Weight: 65 kg

2410 EVAPORATION BATH "AIR AND STEAM JET"

ACCESSORIES ON REQUEST

2470/BCA200	ANALYTICAL BALANCE
	Range 220 g., readout 0.0001, pan Ø80
10-2411	BEAKER, conf.5 pz Ø50x78 mm
10-2412	TONG
	For use in handling the beakers, PTFE covered
10-2413	STEAM GENERATOR
2460/CB25	AIR PUMP
T-AS3C	THERMOMETER ASTM 3C IP 73C

CONSUMABLES x 2 YEARS

10-2411	BEAKER, pack of 5 pcs x2
---------	--------------------------

SPARE PARTS

15-2415	FLOWMETER
15-2416	JET, pack of 5 pcs
15-2417	PRESSURE GAUGE
11-2411	HEATER
11-2412	STRIP HEATER
14-0001/A	PT100A PROBE
16-0007	DIGITAL THERMOREGULATOR
15-0015	STATIC RELAY
15-0019	EARTH LEAKAGE CIRCUIT BREAKER
15-0005	BIPOLAR YELLOW SWITCH



SCOTT**ASTM D454 RUBBER DETERIORATION BY HEAT AND AIR PRESSURE**

This test method covers a procedure to determine the influence of elevated temperature and air pressure on the physical properties of vulcanized rubber. The results of this test may not give an exact correlation with service performance since performance conditions vary widely. The test may, however, be used to evaluate rubber compounds on a laboratory comparison basis. It will be most applicable to performance under conditions of increased temperature and air pressure.

ASTM D572 RUBBER-DETERIORATION BY HEAT AND OXYGEN

This test method covers a procedure to determine the relative deterioration resistance of vulcanized rubber in a high temperature and high pressure oxygen environment. There may be no exact correlation between this accelerated test and natural aging of rubber because of the varied conditions of natural aging. This accelerated test is suitable for laboratory compound or product comparisons.

Fully made in stainless steel, this bath has a capacity of about 15 l and is thermostated by a digital thermoregulator PID, with overtemperature alarm. The uniformity of thermostating is controlled by a stirrer motor. The bath includes a cooling coil and a double bottom used as bearing surface for cylinders and test-piece holders

Technical specifications:

- Temperature: from ambient to 150°C (302°F)
- Stability: ±0.1°
- Capacity: 15 l about
- Power supply: 230V ±10% 50/60Hz

2390 SCOTT BATH**ACCESSORIES ON REQUEST**

10-2390	SCOTT CYLINDER Completely made in 18/8 stainless steel, 300 ml capacity, PTFE gaskets, 3 internal hooks for testing, cover tted with central column, stainless steel pin valve for recharge, pressure gauge 0-435 psi / 3000 kPa
---------	---

CONSUMABLES x 2 YEARS

15-2391	PTFE GASKET, pack of 10 pcs x1
---------	--------------------------------

SPARE PARTS

15-2392	HOOK
15-2393	PIN VALVE
15-2394	PRESSURE GAUGE
11-2390	STRIP HEATER
15-0003/150	LEVEL SWITCH
14-0002	PROBE PT100A L=200 mm
16-0005	DIGITAL THERMOREGULATO
15-0015	STATIC RELAY
15-0004	BIPOLAR GREEN SWITCH

SOFTENING POINT - RING AND BALL

ASTM D36 IP 58 EN 1427 SOFTENING POINT OF BITUMEN (RING-AND-BALL APPARATUS)

This test method covers the determination of the softening point of bitumen in the range from 30 to 157°C (86 to 315°F) using the ring-and-ball apparatus immersed in distilled water (30 to 80°C) (86 to 186°F) or USP glycerin (80 to 157°C) (186 to 315°F).

ASTM E28 SOFTENING POINT OF RESINS DERIVED FROM NAVAL STORES BY RING-AND-BALL APPARATUS

Consisting of: a beaker Ø85x130 mm, two-place brass cage adjustable for height, 2 hardened steel balls Ø9.5 mm, 2 rings with collar for centering the balls, heating device unit and motor stirrer.

Technical specifications:

- Temperature: from ambient to 250°C (482°F)
- Power supply: 230V ±10% 50/60Hz
- Power: 700W
- Dimensions: 13x21x55 cm
- Weight: 3 kg

2170 RING AND BALL APPARATUS

ACCESSORIES ON REQUEST

10-2170/IP1	RING AND COLLAR IP fig.1, pack of 2 pcs
10-2170/IP2	RING AND COLLAR IP fig.2, pack of 2 pcs
10-2170/IP3	RING IP fig.3, pack of 2 pcs
10-2172/5	GLYCERIN 99.5%, pack of 5 kg
10-2172/10	GLYCERIN 99.5%, pack of 10 kg
10-2172/25	GLYCERIN 99.5%, pack of 25 kg
T-AS15C	THERMOMETER ASTM 15C IP 60C
T-AS16C	THERMOMETER ASTM 16C IP 61C
T-AS5C	THERMOMETER ASTM 5C IP 1C (for ASTM E28)
T-AS7C	THERMOMETER ASTM 7C IP 5C (for ASTM E28)

SPARE PARTS

15-2170/B	RING AND BALL SET Beaker Ø85x130 mm., two-place brass cage adjustable for height, 2 hardened steel balls Ø9.5 mm, 2 rings with collar for centering the balls.
15-2171	BALLS, pack of 20 pcs
15-2172	BEAKER
15-2173	CAGE
15-2176	RING ASTM, pack of 2 pcs
15-2177	COLLAR ASTM, pack of 2 pcs
11-0022	HEATER
17-0003	TRANSFORMER
15-0004	BIPOLAR GREEN SWITCH
15-0005	BIPOLAR YELLOW SWITCH
15-0110	ELECTRONIC REGULATOR
12-0002	MOTOR STIRRER



2170 + T-AS15C

2012

BREAKING POINT - FRAASS

IP 80 EN 12593 DIN 52012 BITUMEN AND BITUMINOUS BINDERS - DETERMINATION OF THE FRAASS BREAKING POINT

This standard specifies a method for determining the Fraass breaking point which provides a measure of the brittleness of bitumen and bituminous binders at low temperature.

Comprises 2 concentric resin tubes topped by two clamps for the plate and the flexing brass system, harmonic steel plate 41x20x0.15mm, a cooling system by dry ice with 3 concentric glass tubes and funnel, a cork stopper.

2520 FRAASS APPARATUS

2520/BIS FRAASS APPARATUS

With Dewar

Bench model with refrigeration group system up to -30°C (-22°F), external frame painted with epoxy acid-proof and internal aluminum block with inspection window with light. Glass probe PT100A, color touch screen front panel, automatic ramp at 1°C/min, heating element for a quick return to a ambient temperature, automatic movement electric system for plate, inspection window for visual determination of the breaking point

- Technical specifications:
- Temperature: from ambient to -30°C (-22°F)
 - Power supply: 230V ±10% 50Hz
 - Power: 1300W
 - Dimensions: 60x80x82 cm
 - Peso: 80 kg

2520/SEM SEMI-AUTOMATIC FRAASS

ACCESSORIES ON REQUEST

- 10-2521 PLATE, pack of 25 pcs
Made of armonic steel, 41x20x0.5 mm
- 10-2522 HEATING/COOLING DEVICE
With bubble level and level adjustment screws. two distinct zones: one temperature regulated and controlled, the other one cooled by water circulation. Magnet block with a flat and smooth surface holding one to three plates with a suitable cover.
- T-IP42C THERMOMETER IP 42C

CONSUMABLES x 2 YEARS

- 10-2521 PLATE, pack of 25 pcs x2

SPARE PARTS

- 15-2522/E OUTER GLASS TUBE
- 15-2522/M MEDIAN GLASS TUBE
- 15-2522/I INNER GLASS TUBE
- 15-2523 LAMP
- 15-2524/B MEGNET BLOCK
- 15-2524/C HOLDING COVER
- 15-2525 FILLER FUNNEL
- 15-2526 CORK SERIES, pack of 3 pcs
- 15-2527 BRASS SYSTEM BENDING
- 15-2528 DEWAR
- 15-2529/G OUTER TUBE
- 15-2529/P INNER TUBE



2520/BIS

2006



2520/SEM

2011

DUCTILOMETER

ASTM D113 IP 32 (obs) DUCTILITY OF BITUMINOUS MATERIALS

This test method describes the procedure for determining the ductility of a bituminous material measured by the distance to which it will elongate before breaking when two ends of a briquet specimen of the material, of the form described in Section 4, are pulled apart at a specified speed and at a specified temperature. Unless otherwise specified, the test shall be made at a temperature of $25 \pm 0.5^\circ\text{C}$ and with a speed of 5 cm/min $\pm 5.0\%$. At other temperatures the speed should be specified.

ASTM D6084 ELASTIC RECOVERY OF BITUMINOUS MATERIALS BY DUCTILOMETER

This test method covers the elastic recovery of a bituminous material measured by the recoverable strain determined after severing an elongated briquet specimen of the material of the form described in . The specimens are pulled to a specified distance at a specified speed and at a specified temperature. Unless otherwise specified, the test shall be made at a temperature of $25 \pm 0.5^\circ\text{C}$ ($77 \pm 0.9^\circ\text{F}$) and with a speed of 5 cm/min $\pm 5\%$

EN 13398 DETERMINATION OF THE ELASTIC RECOVERY OF MODIFIED BITUMEN

This standard specifies a method for the determination of the elastic recovery of bituminous binders in a ductilometer at a given temperature. It is especially applicable to bituminous binders modified with thermoplastic elastomers, but can also be used with other bituminous binders which generate only small recovery

EN 13589 DETERMINATION OF THE TENSILE PROPERTIES OF MODIFIED BITUMEN BY THE FORCE DUCTILITY METHOD

This European Standard specifies a method for determining the tensile properties of a bituminous binder, in particular those of polymer-modified bitumens by means of a force ductility test.

EN 13703 DETERMINATION OF DEFORMATION ENERGY

This European Standard specifies a method for determining the conventional energy of bituminous binders from tensile characteristics

Three-places stainless steel structure with a 1.500 mm stroke, transmission of 10 revolutions on square-thread traction rod, 5 cm/min speed, ¼ Hp one-phase geared motor, stainless steel tank, insulated walls, armoured stainless steel heater controlled by a digital thermoregulator with overtemperature alarm and probe PT100A, cooling coil, traction brass carriage holding moulds, circulation pump for stirring the liquids.

730 DUCTILOMETER

Technical specifications:

- Temperature: from ambient to 50°C (122°F)
- Stability: $\pm 0.1^\circ\text{C}$
- Power supply: 230V $\pm 10\%$ 50Hz
- Power: 1300W
- Dimensions: 185x40x67 cm
- Weight: 55 kg

730/R REFRIGERATED DUCTILOMETER

Technical specifications:

- Temperature: from 5 to 50°C ($41 + 50^\circ\text{F}$)
- Stability: $\pm 0.1^\circ\text{C}$
- Power supply: 230V $\pm 10\%$ 50Hz
- Power: 1800W
- Dimensions: 185x40x67 cm
- Weight: 75 kg

730/AUT

AUTOMATIC REFRIGERATED DUCTILOMETER

Three-places stainless steel structure with a 1.500 mm briquette capacity, a 2 phase step motor with a built in line encoder, maximum load of 1500N (3x500N load cell), PLC temperature controlled with advanced PID algorithm 2 x cross contrast heat and cool for refrigerated ductilometer.

This is a stand alone unit with a 12" TFT touch screen display with a resolution of 1024X768, serial, USB, network printers support, keyboard, mouse and other input devices support, on request barcode reader support, Serial RS232 and email system support to directly email results from the instrument. Repeatability and deviation test reports and calculations of the conventional energy (EN 13703), traction speed from 1 mm/min. to 300 mm/min., traction measurement from 5mm to 1500mm, automatic position for molds based on selected method, automatic recognition of a test positioned ductility mould, real time graphics (elongation, speed, force, time) real time live position and live speed given by encoder, over temperature security system including bath and motor drive temperature.

Automatic recognition of a new load cell kit (load cell + programed module) after reboot or startup.

Automatic calculations, algorithms and results.

Download and printing support for any test report file, graph, repeatability for 3 tests (successive, user selected or simultaneous).

The instrument comes equipped with 3 load cell 500N Temperature controller precision of 0.1°C $0 + 50^\circ\text{C}$ ($32 + 122^\circ\text{F}$)

Technical specifications:

- Temperature: from -10 to 50°C ($41 + 50^\circ\text{F}$)
- Stability: $\pm 0.1^\circ\text{C}$
- Power supply: 230V $\pm 10\%$ 50Hz
- Power: 3000W
- Dimensions: 234x40x108 cm
- Weight: about 200 kg

ACCESSORIES ON REQUEST

- 10-0731/113 MOLD ASTM D113
Made of brass
- 10-0731/6084 MOLD ASTM D6084
Made of brass
- 10-0731/13398 MOLD EN 13398
Made of brass
- 10-0731/13589 MOLD EN 13589
Made of brass
- 10-0732 MOLD HOLDER
- T-AS63C THERMOMETER ASTM 63C

730/AUT

2016



FLOAT TEST

ASTM D139 FLOAT TEST FOR BITUMINOUS MATERIALS

Aluminum cup with 3 standard brass collars.

2700 FLOAT TEST APPARATUS

ACCESSORIES ON REQUEST

T-AS15C THERMOMETER ASTM 15C

SPARE PARTS

15-2701 CUP
15-2702 COLLAR, pck of 3 pcs



EMULSIFIED ASPHALTS

ASTM D244 STANDARD TEST METHODS AND PRACTICES FOR EMULSIFIED ASPHALTS

ASTM D6997 DISTILLATION OF EMULSIFIED ASPHALT

This test method covers the quantitative determination of residue and oil distillate in emulsified asphalts composed principally of a semisolid or liquid asphaltic base, water, and an emulsifying agent.

Aluminium alloy boiler with ring burner for heating, connection glass tube with protection shield, glass condenser for water circulation, 100 ml graduated cylinder, supporting ring, bases with rods, pliers.

2710 RESIDUE BY DISTILLATION APPARATUS FOR EMULSIFIED ASPHALTS

ACCESSORIES ON REQUEST

10-0748 GAS CYLINDER 2 KG.
Empty
10-0749 GAS REDUCER 30 MBAR
10-0747 GAS TUBE, L=5 M.
10-2711 SIEVE
T-AS7C THERMOMETER ASTM 7C x2

SPARE PARTS

15-2711 RING BURNER
15-2712 CONNECTION GLASS TUBE
15-2713 CONDENSER
15-2714 INNER TUBE CONDENSER
10-1187/P CYLINDER
15-2715 BOILER
15-2716 DRAINING TUBE



ROLLING THIN FILM - RTFOT

ASTM D2872 EFFECT OF HEAT AND AIR ON A MOVING FILM OF ASPHALT (ROLLING THIN-FILM OVEN TEST)

This test method is intended to measure the effect of heat and air on a moving film of semi-solid asphaltic materials. The effects of this treatment are determined from measurements of the selected properties of the asphalt before and after the test.

EN 12607-1 DETERMINATION OF THE RESISTANCE TO HARDENING UNDER INFLUENCE OF HEAT AND AIR. RTFOT METHOD

Completely made in stainless steel, aluminum carriage rotating at 15 rpm - circular and vertical - with 8 places for glass containers, internal fan controlled by a 1725 rpm motor, copper coil with nozzle pre-heating the air, flowmeter with regulator valve, digital thermoregulator with PID function and probe PT100, double wall locking door with toughened glass window, internal light.

Technical specifications:

- Temperature: from ambient to 170°C (338°F)
- Stability: ±0.5°C
- Power supply: 230V ±10% 50Hz
- Power: 1500W
- Weight: 90 kg

2550 RTFOT OVEN ASTM

ACCESSORIES ON REQUEST

- | | |
|---------|-----------------------------|
| 10-2551 | CONTAINER |
| | Made of glass |
| T-AS13C | THERMOMETER ASTM 13C IP 47C |

CONSUMABLES x 2 YEARS

- | | |
|--------------|------------------------|
| 15-2552/ASTM | BELT, pack of 2 pcs x1 |
| 15-2552/EN | BELT, pack of 2 pcs x1 |

SPARE PARTS

- | | |
|-------------|-----------------|
| 15-2555 | BEARING FOR FAN |
| 12-2550/CAR | CARRIAGE MOTOR |
| 12-2550/FAN | FAN MOTOR |



"LOSS ON HEATING" E "TFOT"

ASTM D6 IP 45 EN 13303 LOSS ON HEATING OF OIL AND ASPHALTIC COMPOUNDS

This test method covers the determination of the loss in mass (exclusive of water) of oil and asphaltic compounds when heated as hereinafter prescribed.

ASTM D1754 EN 12607-2 EFFECT OF HEAT AND AIR ON ASPHALTIC MATERIALS (THIN-FILM OVEN TEST)

This test method covers the determination of the effects of heat and air on a film of semisolid asphaltic materials. The effects of this treatment are determined from measurements of selected asphalt properties before and after the test.

Completely made in stainless steel, natural ventilation, internal support (on request) rotating at 5-6 rpm controlled by a geared motor located on the oven top, digital thermoregulator PID with overtemperature alarm and probe PT100A, double wall locking door with toughened glass window, internal light.

Technical specifications:

- Temperature: from ambient to 180°C (356°F)
- Stability: ±1°C
- Power supply: 230V ±10% 50/60Hz
- Power: 1200W
- Dimensions: 59x51x77 cm
- Weight: 24 kg

2560 LOSS AND TFOT OVEN

ACCESSORIES ON REQUEST

- | | |
|--------------|--|
| 10-2561/6 | SUPPORT ASTM D6 |
| | 9 positions |
| 10-2562/6 | CONTAINER ASTM D6 |
| | Made of brass |
| 10-2561/1754 | SUPPORT ASTM D1754 |
| | 4 positions |
| 10-2562/1754 | CONTAINER ASTM D1754 |
| | Made of stainless steel |
| 10-2563 | PALETTE FOR CONTAINER ASTM D1754 |
| | Made of stainless steel, for remove the container on the support |
| T-AS13C | THERMOMETER ASTM 13C IP 47C |

SPARE PARTS

- | | |
|---------|-------|
| 12-2560 | MOTOR |
|---------|-------|



OTHER

SMOKE POINT

ASTM D1322 IP 57 SMOKE POINT OF KEROSENE AND AVIATION TURBINE FUEL

This test method covers two procedures for determination of the smoke point of kerosine and aviation turbine fuel, a manual procedure and an automated procedure, which give results with different precision.

Brass lamp painted in black, millimetric white scale on a black background, window with mobile glass, brass candle with oil tank and cotton wick 180mm long, micrometric setting.

Technical specifications:

- Dimensions: 35x25x20 cm
- Weight: 5 kg

2530 SMOKE POINT APPARATUS



ACCESSORIES ON REQUEST

- | | |
|---------|-----------------------------|
| 10-2531 | WICK, pack of 100 pcs |
| T-AS13C | THERMOMETER ASTM 13C IP 47C |

CONSUMABLES x 2 YEARS

- | | |
|---------|--------------------------|
| 10-2531 | WICK, pack of 100 pcs x2 |
|---------|--------------------------|

SPARE PARTS

- | | |
|---------|---------------------|
| 15-2532 | CANDLE |
| 15-2533 | CURVED GLASS WINDOW |
| 15-2535 | SCALE |
| 15-2536 | MIRROR |

WATER REACTION

ASTM D1094 WATER REACTION OF AVIATION FUELS

This test method covers the determination of the presence of water-miscible components in aviation gasoline and turbine fuels, and the effect of these components on volume change and on the fuel-water interface

Composed by a cylinder in glass from 100ml div.1ml with cork of closing, shacker to horizontal movement with varying speed from 60 to 350rpm, move of the axle 20mm, timer 0-120min., plain of support with support for adjustable bars of xing in height and width.

2730 WATER REACTION AVIATION FUELS APPARATUS

OTHER

2470/...

BALANCE

Analytical from 120 to 310 g, 0.0001
Electronic from 160 to 1200 g, 0.001
Electronic from 200 to 3000 g, 0.01
Electronic from 1500 to 6200 g, 0.01
Electronic from 4500 to 30000 g, 0.1

2480/F/...

OVEN - FORCED VENTILATION

Forced ventilation. Made in stainless steel, thermic insulation provided by mineral natural fiber. Temperature is controlled by a digital thermoregulator, temperature range from ambient to 200°C. In order to improve the protection, this item is provided with a safety thermostat with visual warning. Internal steel shelves adjustable for height, breather chimney with manual flow-setting. Heating elements touch the pre-chamber and not the internal chamber in order to give an evenly spread heating. Dimensions on request

2480/N/...

OVEN - NATURAL VENTILATION

Dimensions on request

1290/...

HEATING MANTLE

Cylindrical body from painted plate resistant to more common chemical aggressors, internal resistance in nickel-chromium wire, steatite lined, for high electric insulation, internal thermal insulation in glass fibre and mineral rock wool, control unit in separate chamber at base of device. Max. temperature range 350°C (662°F)
Precision $\pm 5^{\circ}\text{C}$.
Capacity: 50, 100, 150, 250, 500, 1000, 2000, 3000, 5000, 6000, 10000 cc.

ASTM THERMOMETERS

ARTICLE	ASTM	IP	NAME	RANGE	DIV. (T°)	IMM. (mm)	LENGTH (mm)
T-AS1C	1C	-	Partial immersion	-20 +150°C	1	76	322
T-AS1F	1F	-	Partial immersion	0 +302°F	2	76	322
T-AS2C	2C	-	Partial immersion	-5 +300°C	1	76	390
T-AS2F	2F	-	Partial immersion	20 +580°F	2	76	390
T-AS3C	3C	-	Partial immersion	-5 +400°C	1	76	415
T-AS3F	3F	-	Partial immersion	20 +760°F	2	76	415
T-AS5C	5C	1C	Cloud and Pour	-38 +50°C	1	108	230
T-AS5F	5F	1F	Cloud and Pour	-36 +120°F	2	108	230
T-AS6C	6C	2C	Low Cloud and Pour	-80 +20°C	1	76	230
T-AS6F	6F	2F	Low Cloud and Pour	-112 +70°F	2	76	230
T-AS7C	7C	5C	Low Distillation	-2 +300°C	1	Total	385
T-AS7F	7F	5F	Low Distillation	30 +580°F	2	Total	385
T-AS8C	8C	6C	High Distillation	-2 +400°C	1	Total	385
T-AS8F	8F	-	High Distillation	30 +760°F	2	Total	385
T-AS9C	9C	15C	Low Pensky-Martens	-5 +110°C	0.5	57	290
T-AS9F	9F	15F	Low Pensky-Martens	20 +230°F	1	57	290
T-AS10C	10C	16C	High Pensky-Martens	90 +370°C	2	57	290
T-AS10F	10F	16F	High Pensky-Martens	200 +700°F	5	57	290
T-AS11C	11C	28C	Cleveland Open Flash	-6 +400°C	2	25	310
T-AS11F	11F	28F	Cleveland Open Flash	20 +760°F	5	25	310
T-AS12C	12C	64C	Density-Wide Range	-20 +102°C	0.2	Total	420
T-AS12F	12F	64F	Density-Wide Range	-5 +215°F	0.5	Total	420
T-AS13C	13C	47C	Loss on Heat	155 +170°C	0.5	Total	155
T-AS14C	14C	17C	Wax Melting Point	38 +82°C	0.1	79	375
T-AS14F	14F	17F	Wax Melting Point	100 +180°F	0.2	79	375
T-AS15C	15C	60C	Low Softening Point	-2 +80°C	0.2	Total	395
T-AS15F	15F	-	Low Softening Point	30 +180°F	0.5	Total	395
T-AS16C	16C	61C	High Softening Point	30 +200°C	0.5	Total	395
T-AS16F	16F	-	High Softening Point	85 +392°F	1	Total	395
T-AS17C	17C	-	Saybolt Viscosity	19 +27°C	0.1	Total	275
T-AS17F	17F	-	Saybolt Viscosity	66 +80°F	0.2	Total	275
T-AS18C	18C	23C	Reid Vapour Pressure	34 +42°C	0.1	Total	275
T-AS18F	18F	23F	Reid Vapour Pressure	94 +108°F	0.2	Total	275
T-AS19C	19C	-	Saybolt Viscosity	49 +57°C	0.1	Total	275
T-AS19F	19F	-	Saybolt Viscosity	120 +134°F	0.2	Total	275
T-AS20C	20C	-	Saybolt Viscosity	57 +65°C	0.1	Total	275
T-AS20F	20F	-	Saybolt Viscosity	134 +148°F	0.2	Total	275
T-AS21C	21C	-	Saybolt Viscosity	79 +87°C	0.1	Total	275
T-AS21F	21F	-	Saybolt Viscosity	174 +188°F	0.2	Total	275
T-AS22C	22C	24C	Oxidation Stability	95 +103°C	0.1	Total	275
T-AS22F	22F	24F	Oxidation Stability	204 +218°F	0.2	Total	275
T-AS23C	23C	-	Engler Viscosity	18 +28°C	0.2	90	212
T-AS24C	24C	-	Engler Viscosity	39 +54°C	0.2	90	237
T-AS25C	25C	-	Engler Viscosity	95 +105°C	0.2	90	212
T-AS26C	26C	-	Stability Test	130 +140°C	0.1	Total	463
T-AS27C	27C	-	Turpentine Distillation	147 +182°C	0.5	76	301
T-AS28C	28C	31C	Kinematic Viscosity	36.6 +39.4°C	0.05	Total	305
T-AS28F	28F	31F	Kinematic Viscosity	97.5 +102.5°F	0.1	Total	305
T-AS29C	29C	34C	Kinematic Viscosity	52.6 +55.4°C	0.05	Total	305
T-AS29F	29F	34F	Kinematic Viscosity	127.5 +132.5°F	0.1	Total	305
T-AS30F	30F	32F	Kinematic Viscosity	207.5 +212.5°F	0.1	Total	305

ARTICLE	ASTM	IP	NAME	RANGE	DIV. (T°)	IMM. (mm)	LENGTH (mm)
T-AS33C	33C	20C	Low Aniline Point	-38 +42°C	0.2	50	420
T-AS33F	33F	-	Low Aniline Point	-36.5 +107.5°F	0.5	50	420
T-AS34C	34C	21C	Medium Aniline Point	25 +105°C	0.2	50	420
T-AS34F	34F	-	Medium Aniline Point	77 +221°F	0.5	50	420
T-AS35C	35C	59C	High Aniline Point	90 +170°C	0.2	50	420
T-AS35F	35F	-	High Aniline Point	194 +338°F	0.5	50	420
T-AS36C	36C	-	Titer Test	-2 +68°C	0.2	45	405
T-AS37C	37C	77C	Solvents Distillation	-2 +52°C	0.2	100	395
T-AS38C	38C	78C	Solvents Distillation	24 +78°C	0.2	100	395
T-AS39C	39C	79C	Solvents Distillation	48 +102°C	0.2	100	395
T-AS40C	40C	80C	Solvents Distillation	72 +126°C	0.2	100	395
T-AS41C	41C	81C	Solvents Distillation	98 +152°C	0.2	100	395
T-AS42C	42C	82C	Solvents Distillation	95 +255°C	0.5	100	395
T-AS43C	43C	65C	Kinematic Viscosity	-51.6 -34°C	0.1	Total	420
T-AS43F	43F	65F	Kinematic Viscosity	-61 -29°F	0.2	Total	420
T-AS44C	44C	29C	Kinematic Viscosity	18.6 +21.4°C	0.05	Total	305
T-AS44F	44F	29F	Kinematic Viscosity	66.5 +71.5°F	0.1	Total	305
T-AS45C	45C	30C	Kinematic Viscosity	23.6 +26.4°C	0.05	Total	305
T-AS45F	45F	30F	Kinematic Viscosity	74.5 +79.5°F	0.1	Total	305
T-AS46C	46C	66C	Kinematic Viscosity	48.6 +51.4°C	0.05	Total	305
T-AS46F	46F	66F	Kinematic Viscosity	119.5 +124.5°	0.1	Total	305
T-AS47C	47C	35C	Kinematic Viscosity	58.6 +61.4°C	0.05	Total	305
T-AS47F	47F	35F	Kinematic Viscosity	137.5 +142.5°F	0.1	Total	305
T-AS48C	48C	90C	Kinematic Viscosity	80.6 +83.4°C	0.05	Total	305
T-AS48F	48F	90F	Kinematic Viscosity	177.5 +182.5°F	0.1	Total	305
T-AS49C	49C	-	Stormer Viscosity	20 +70°C	0.2	65	305
T-AS50F	50F	-	Gas Calorimeter Inlet	54 +101°F	0.1	Total	468
T-AS51F	51F	-	Gas Calorimeter Inlet	69 +116°F	0.1	Total	468
T-AS52C	52C	-	Butadiene Boiling Point	-10 +5°C	0.1	Total	162
T-AS54C	54C	18C	Congealing Point	20 +100.6°F	0.2	Total	310
T-AS54F	54F	18F	Congealing Point	68 +213°F	0.5	Total	310
T-AS56C	56C	-	Bomb Calorimeter	19 +35°C	0.02	Total	585
T-AS56F	56F	-	Bomb Calorimeter	66 +95°F	0.05	Total	585
T-AS57C	57C	-	Tag Closed	-20 +50°C	0.5	57	287
T-AS57F	57F	-	Tag Closed	-4 +122°F	1	57	287
T-AS58C	58C	-	Tank	-34 +49°C	0.5	Total	303
T-AS58F	58F	-	Tank	-30 +120°F	1	Total	303
T-AS59C	59C	-	Tank	-18 +82°C	0.5	Total	303
T-AS59F	59F	-	Tank	0 +180°F	1	Total	303
T-AS60C	60C	-	Tank	77 +260°C	1	Total	303
T-AS60F	60F	-	Tank	170 +500°F	2	Total	303
T-AS61C	61C	63C	Petrolatum Melting Point	32 +127°C	0.2	79	380
T-AS61F	61F	-	Petrolatum Melting Point	90 +260°F	0.5	79	380
T-AS62C	62C	-	Precision	-38 +2°C	0.1	Total	379
T-AS62F	62F	-	Precision	-36 +35°F	0.2	Total	379
T-AS63C	63C	-	Precision	-8 +32°C	0.1	Total	379
T-AS63F	63F	-	Precision	18 +89°F	0.2	Total	379
T-AS64C	64C	-	Precision	25 +55°C	0.1	Total	379
T-AS64F	64F	-	Precision	77 +131°F	0.2	Total	379
T-AS65C	65C	-	Precision	50 +80°C	0.1	Total	379
T-AS65F	65F	-	Precision	122 +176°F	0.2	Total	379
T-AS66C	66C	-	Precision	75 +105°C	0.1	Total	379
T-AS66F	66F	-	Precision	167 +221°F	0.2	Total	379

ARTICLE	ASTM	IP	NAME	RANGE	DIV. (T°)	IMM. (mm)	LENGTH (mm)
T-AS67C	67C	-	Precision	95 +155°C	0.2	Total	379
T-AS67F	67F	-	Precision	203 +311°F	0.5	Total	379
T-AS68C	68C	-	Precision	145 +205°C	0.2	Total	379
T-AS68F	68F	-	Precision	293 +401°F	0.5	Total	379
T-AS69C	69C	-	Precision	195 +305°C	0.5	Total	379
T-AS69F	69F	-	Precision	383 +581°F	1	Total	379
T-AS70C	70C	-	Precision	295 +405°C	0.5	Total	379
T-AS70F	70F	-	Precision	563 +761°F	1	Total	379
T-AS71C	71C	72C	Oil in Wax	-37 +21°C	0.5	76	355
T-AS71F	71F	72F	Oil in Wax	-35 +70°F	1	76	355
T-AS72C	72C	67C	Kinematic Viscosity	-19.4 -16.6°C	0.05	Total	305
T-AS72F	72F	67F	Kinematic Viscosity	-2.5 +2.5°F	0.1	Total	305
T-AS73C	73C	68C	Kinematic Viscosity	-41.4 -38.6°C	0.05	Total	305
T-AS73F	73F	68F	Kinematic Viscosity	-42.5 -37.5°F	0.1	Total	305
T-AS74C	74C	69C	Kinematic Viscosity	-55.4 -52.6°C	0.05	Total	305
T-AS74F	74F	69F	Kinematic Viscosity	-67.5 -62.5°F	0.1	Total	305
T-AS75F	75F	-	Anti-freeze Freezing Point	-35 +35°F	0.5	100	408
T-AS76F	76F	-	Anti-freeze Freezing Point	-65 +5°F	0.5	100	408
T-AS77F	77F	-	Saybolt Viscosity	245 +265°F	0.5	Total	275
T-AS78F	78F	-	Saybolt Viscosity	295 +315°F	0.5	Total	275
T-AS79F	79F	-	Saybolt Viscosity	345 +365°F	0.5	Total	275
T-AS80F	80F	-	Saybolt Viscosity	395 +415°F	0.5	Total	275
T-AS81F	81F	-	Saybolt Viscosity	445 +465°F	0.5	Total	275
T-AS82C	82C	-	Fuel Rating. Engine	-15 +105°C	1	30	162
T-AS82F	82F	-	Fuel Rating. Engine	0 +220°F	2	30	162
T-AS83C	83C	-	Fuel Rating. Air	15 +70°C	1	40	171
T-AS83F	83F	-	Fuel Rating. Air	60 +160°F	1	40	171
T-AS84C	84C	-	Fuel Rating. Orifice Tank	25 +80°C	1	249	382
T-AS84F	84F	-	Fuel Rating. Orifice Tank	75 +175°F	1	249	382
T-AS85C	85C	-	Fuel Rating. Surge	40 +150°C	1	181	310
T-AS85F	85F	-	Fuel Rating. Surge	100 +300°F	2	181	310
T-AS86C	86C	-	Fuel Rating. Mix	95 +175°C	1	35	167
T-AS86F	86F	-	Fuel Rating. Mix	200 +350°F	2	35	167
T-AS87C	87C	-	Fuel Rating. Coolant	150 +205°C	1	40	172
T-AS87F	87F	-	Fuel Rating. Coolant	300 +400°F	1	40	172
T-AS88C	88C	101C	Vegetable Oil Flash	10 +200°C	1	57	287
T-AS88F	88F	-	Vegetable Oil Flash	50 +392°F	2	57	287
T-AS89C	89C	-	Solidification Point	-20 +10°C	0.1	76	370
T-AS90C	90C	-	Solidification Point	0 +30°C	0.1	76	370
T-AS91C	91C	-	Solidification Point	20 +50°C	0.1	76	370
T-AS92C	92C	-	Solidification Point	40 +70°C	0.1	76	370
T-AS93C	93C	-	Solidification Point	60 +90°C	0.1	76	370
T-AS94C	94C	-	Solidification Point	80 +110°C	0.1	76	370
T-AS95C	95C	-	Solidification Point	100 +130°C	0.1	76	370
T-AS96C	96C	-	Solidification Point	120 +150°C	0.1	76	370
T-AS97C	97C	-	Tank	-18 +49°C	0.5	Total	302
T-AS97F	97F	-	Tank	0 +120°F	1	Total	302
T-AS98C	98C	-	Tank	16 +82°C	0.5	Total	302
T-AS98F	98F	-	Tank	60 +180°F	1	Total	302
T-AS99C	99C	-	Weathering Test	-50 +5°C	0.2	35	302
T-AS99F	99F	-	Weathering Test	-58 +41°F	0.5	35	302
T-AS100C	100C	-	Solidification Point	145 +205°C	0.2	76	370
T-AS101C	101C	-	Solidification Point	195 +305°C	0.5	76	370

ARTICLE	ASTM	IP	NAME	RANGE	DIV. (T°)	IMM. (mm)	LENGTH (mm)
T-AS102C	102C	83C	Solvents Distillation	123 +177°C	0.2	100	395
T-AS 103C	103C	84C	Solvents Distillation	148 +202°C	0.2	100	395
T-AS104C	104C	85C	Solvents Distillation	173 +227°C	0.2	100	395
T-AS105C	105C	86C	Solvents Distillation	198 +252°C	0.2	100	395
T-AS106C	106C	87C	Solvents Distillation	223 +277°C	0.2	100	395
T-AS107C	107C	88C	Solvents Distillation	248 +302°C	0.2	100	395
T-AS108F	108F	-	Saybolt Viscosity	270 +290°F	0.5	Total	275
T-AS109F	109F	-	Saybolt Viscosity	320 +340°F	0.5	Total	275
T-AS110C	110C	93C	Kinematic Viscosity	133.6 +136.4°C	0.05	Total	305
T-AS110F	110F	-	Kinematic Viscosity	272.5 +277.5°F	0.1	Total	305
T-AS111C	111C	-	Tar Acids Distillation	170 +250°C	0.2	100	395
T-AS112C	112C	-	Solidification Point of Benzene	4 +6°C	0.02	Total	215
T-AS113C	113C	89C	Softening Point Wide Range	-1 +175°C	0.5	Total	405
T-AS113F	113F	89F	Softening Point Wide Range	30 +350°F	1	Total	405
T-AS114C	114C	14C	Aviation Fuel Freezing Point	-80 +20°C	0.5	Total	300
T-AS116C	116C	-	Bomb Calorimeter	18.9 +25.1°C	0.01	Total	609
T-AS117C	117C	-	Bomb Calorimeter	23.9 +30.1°C	0.01	Total	609
T-AS118C	118C	-	Kinematic Viscosity	28.6 +31.4°C	0.05	Total	305
T-AS118F	118F	-	Kinematic Viscosity	83.5 +88.5°F	0.1	Total	305
T-AS119C	119C	-	Anti-Freeze Freezing Point	-38.3 -30°C	0.1	100	420
T-AS119F	119F	-	Anti-Freeze Freezing Point	-37 -22°F	0.2	100	420
T-AS120C	120C	92C	Kinematic Viscosity	38.6 +41.4°C	0.05	Total	305
T-AS121C	121C	32C	Kinematic Viscosity	98.6 +101.4°C	0.05	Total	305
T-AS122C	122C	94C	Brookfield Viscosity	-45 -35°C	0.1	Total	300
T-AS123C	123C	95C	Brookfield Viscosity	-35 -25°C	0.1	Total	300
T-AS124C	124C	96C	Brookfield Viscosity	-25 -15°C	0.1	Total	300
T-AS125C	125C	97C	Brookfield Viscosity	-15 -5°C	0.1	Total	300
T-AS126C	126C	71C	Kinematic Viscosity	-27.4 -24.6°C	0.05	Total	305
T-AS126F	126F	71F	Kinematic Viscosity	-17.5 -12.5°F	0.1	Total	305
T-AS127C	127C	99C	Kinematic Viscosity	-21.4 -18.6°C	0.05	Total	305
T-AS128C	128C	33C	Kinematic Viscosity	-1.4 +1.4°C	0.05	Total	305
T-AS128F	128F	33F	Kinematic Viscosity	29.5 +34.5°F	0.1	Total	305
T-AS129C	129C	36C	Kinematic Viscosity	91.6 +94.4°C	0.05	Total	305
T-AS129F	129F	36F	Kinematic Viscosity	197.5 +202.5°F	0.1	Total	305
T-AS130C	130C	-	TANK	-7 + 105°C	0.5	Total	303
T-AS130F	130F	-	TANK	20 + 220°F	1	Total	303
T-AS132C	132C	102C	Kinematic Viscosity	148.6 + 151.4°C	0.05	Total	305
T-AS133C	133C	-	Precision	-38 + 2°C	0.1	76	379
T-AS134C	134C	37C	Sludge	144 + 156°C	0.2	100	270
T-AS135C	135C	-	Fuel Rating Air-High	38 + 93°C	1	40	171
T-AS135F	135F	-	Fuel Rating Air-High	100 + 200°F	1	40	171
T-AS136C	136C	-	Aviation fuel density	-20 + 60°C	0.2	Total	290
T-AS136F	136F	-	Aviation fuel density	-5 + 140°F	0.5	Total	290
T-AS137C	137C	-	Oxidation Cell test	80 + 100°C	0.1	76	255

IP THERMOMETERS

Article	IP	ASTM	NAME	RANGE	DIV. (T°)	IMM. (mm)	LENGTH (mm)
T-IP1C	1C	5C	Cloud and Pour	-38 +50°C	1	108	230
T-IP1F	1F	5F	Cloud and Pour	-36 +120°F	2	108	230
T-IP2C	2C	6C	Low Cloud and Pour	-80 +20°C	1	76	230
T-IP2F	2F	6F	Low Cloud and Pour	-112 +70°F	2	76	230
T-IP3C	3C	-	Demulsification	-1 +105°C	0.5	Total	280
T-IP3F	3F	-	Demulsification	30 +220°F	1	Total	-
T-IP4C	4C	-	Crude Oil Distillation	-4 +360°C	2	Total	310
T-IP5C	5C	7C	Low Distillation	-2 +300°C	1	Total	385
T-IP6C	6C	8C	High Distillation	-2 +400°C	1	Total	385
T-IP8C	8C	-	Flushing Case Low	0 +45°C	0.2	65	340
T-IP9C	9C	-	Flushing Case Low	40 +85°C	0.2	65	340
T-IP14C	14C	114C	Aviation Fuel freezing Point	-80 +20°C	0.5	Total	300
T-IP15C	15C	9C	Low Pensky-Martens	-5 +110°C	0.5	57	290
T-IP15F	15F	9F	Low Pensky-Martens	20 +230°F	1	57	290
T-IP16C	16C	10C	High Pensky-Martens	90 +370°C	2	57	290
T-IP16F	16F	10F	High Pensky-Martens	200 +700°F	5	57	290
T-IP17C	17C	14C	Wax Melting Point	38 +82°C	0.1	79	375
T-IP17F	17F	14F	Wax Melting Point	100 +180°F	0.2	79	375
T-IP18C	18C	54C	Congealing Point	20 +100.6°C	0.2	Total	310
T-IP20C	20C	54C	Low aniline Point	-38 +42°C	0.2	50	420
T-IP21C	21C	34C	Medium Aniline Point	25 +105°C	0.2	50	420
T-IP22C	22C	-	Oxidation	195 +205°C	0.1	100	300
T-IP23C	23C	18C	Reid Vapour Pressure	34 +42°C	0.1	Total	275
T-IP23F	23F	18F	Reid Vapour Pressure	94 +108°F	0.2	Total	275
T-IP24C	24C	22C	Oxidation Stability	95 +103°C	0.1	Total	275
T-IP24F	24F	22F	Oxidation Stability	204 +218°F	0.2	Total	275
T-IP28C	28C	11C	Cleveland Open Flash	-6 +400°C	2	25	310
T-IP28F	28F	11F	Cleveland Open Flash	20 +760°F	5	25	310
T-IP29C	29C	44C	Kinematic Viscosity	18.6 +21.4°C	0.05	Total	305
T-IP29F	29F	44F	Kinematic Viscosity	66.5 +71.5°F	0.1	Total	305
T-IP30C	30C	45C	Kinematic Viscosity	23.6 +26.4°C	0.05	Total	305
T-IP30F	30F	45F	Kinematic Viscosity	74.5 +79.5°F	0.1	Total	305
T-IP31C	31C	28C	Kinematic Viscosity	36.6 +39.4°C	0.05	Total	305
T-IP31F	31F	28F	Kinematic Viscosity	97.5 +102.5°F	0.1	Total	305
T-IP32C	32C	121C	Kinematic Viscosity	98.6 +101.4°C	0.05	Total	305
T-IP32F	32F	30F	Kinematic Viscosity	207.5 +212.5°F	0.1	Total	305
T-IP33C	33C	128C	Kinematic Viscosity	-1.4 +1.4°C	0.05	Total	305
T-IP33F	33F	128F	Kinematic Viscosity	29.5 +34.5°F	0.1	Total	305
T-IP34C	34C	29C	Kinematic Viscosity	52.6 +55.4°C	0.05	Total	305
T-IP34F	34F	29F	Kinematic Viscosity	127.5 +132.5°F	0.1	Total	305
T-IP35C	35C	47C	Kinematic Viscosity	58.6 +61.4°C	0.05	Total	305
T-IP35F	35F	47F	Kinematic Viscosity	137.5 +142.5°F	0.1	Total	305
T-IP36C	36C	129C	Kinematic Viscosity	91.6 +94.4°C	0.05	Total	305
T-IP36F	36F	129F	Kinematic Viscosity	197.5 +202.5°F	0.1	Total	305
T-IP37C	37C	134C	Sludge	144 +156°C	0.2	100	270
T-IP38C	38C	-	Penetration	23 +27°C	0.1	Total	260
T-IP39C	39C	-	Density	-1 -38°C	0.1	Total	440
T-IP39F	39F	-	Relative Density	30 +100°F	0.2	Total	440
T-IP40C	40C	-	Drop Point Low	20 +120°C	1	100	250
T-IP41C	41C	-	Drop Point Low	100 +230°C	1	100	250
T-IP42C	42C	-	Breaking Point	-30 +30°C	0.5	250	370

Article	IP	ASTM	NAME	RANGE	DIV. (T°)	IMM. (mm)	LENGTH (mm)
T-IP43C	43C	-	FP Cut-Back (Int)	10 +110°C	0.5	-	305
T-IP43F	43F	-	FP Cut-Back (Int)	50 +230°F	1	-	305
T-IP44C	44C	-	FP Cut-Back (Ext)	15 +121°C	0.5	-	305
T-IP44F	44F	-	FP Cut-Back (Ext)	60 +250°F	1	-	305
T-IP45C	45C	-	Refractometer	15 +30°C	0.2	22	160
T-IP46C	46C	-	Gravity Balance	14.5 +21°C	0.1	Total	160
T-IP46F	46F	-	Gravity Balance	58° +70°F	0.2	Total	160
T-IP47C	47C	13C	Loss on Heating	115 +170°C	0.5	Total	155
T-IP48C	48C	-	Tank Low	-38 +30°C	0.5	Total	310
T-IP49C	49C	-	Tank Medium	-15 +40°C	0.5	Total	310
T-IP50C	50C	-	Tank High	10 +65°C	0.5	Total	310
T-IP51C	51C	-	Tank Heated Fuel	35 +120°C	0.5	Total	310
T-IP52C	52C	-	Tank Bitumen	90 +260°C	1	Total	310
T-IP53C	53C	-	Tank Cargo	0 +80°C	0.5	Total	310
T-IP59C	59C	35C	High Aniline Point	90 +170°C	0.2	50	420
T-IP60C	60C	15C	Low Softening Point	-2 +80°C	0.2	Total	395
T-IP61C	61C	16C	High Softening Point	30 +200°C	0.5	Total	395
T-IP62C	62C	-	Partial immersion	-5 +300°C	1	76	390
T-IP62F	62F	-	Partial immersion	20 +580°F	2	76	390
T-IP63C	63C	61C	Petrolatum Melting Point	32 +127°C	0.2	79	380
T-IP64C	64C	12C	Density-Wide Range	-20 +102°C	0.2	Total	420
T-IP64F	64F	12F	Density-Wide Range	-5 +215°F	0.5	Total	420
T-IP65C	65C	43C	Kinematic Viscosity Low	-51.6 -34°C	0.1	Total	417
T-IP65F	65F	43F	Kinematic Viscosity	-61 -29°F	0.2	Total	420
T-IP66C	66C	46C	Kinematic Viscosity	48.6 +51.4°C	0.05	Total	305
T-IP66F	66F	46F	Kinematic Viscosity	119.5 +124.5°F	0.1	Total	305
T-IP67C	67C	72C	Kinematic Viscosity	19.4 -16.6°C	0.05	Total	305
T-IP67F	67F	72F	Kinematic Viscosity	-2.5 +2.5°F	0.1	Total	305
T-IP68C	68C	73C	Kinematic Viscosity	-41.4 -38.6°C	0.05	Total	305
T-IP68F	68F	73F	Kinematic Viscosity	42.5 -37.5°F	0.1	Total	305
T-IP69C	69C	74C	Kinematic Viscosity	-55.4 -52.6°C	0.05	Total	305
T-IP69F	69F	74F	Kinematic Viscosity	67.5 -62.5°F	0.1	Total	305
T-IP71C	71C	126C	Kinematic Viscosity	-27.4 -24.6°C	0.05	Total	305
T-IP71F	71F	126F	Kinematic Viscosity	17.5 -12.5°F	0.1	Total	305
T-IP72C	72C	71C	Oil in Wax	-37 +21°C	0.5	76	355
T-IP72F	72F	71F	Oil in Wax	-35 +70°F	1	76	355
T-IP73C	73C	-	Partial Immersion	-5 +400°C	1	76	415
T-IP73F	73F	-	Partial Immersion	20 +760°F	2	76	415
T-IP74C	74C	-	Abel Oil Cup Wide Range	-35 +70°C	0.5	61	310
T-IP74F	74F	-	Abel Oil Cup Wide Range	-35 +160°F	1	61	310
T-IP75C	75C	-	Abel Water Bath Wide Range	-30 +80°C	0.5	89	310
T-IP75F	75F	-	Abel Water Bath Wide Range	-25° +180°F	1	89	310
T-IP76C	76C	-	Engler Viscosity	10 +55°C	0.5	93	240
T-IP77C	77C	37C	Solvents Distillation	-2 +52°C	0.2	100	395
T-IP78C	78C	38C	Solvents Distillation	24 +78°C	0.2	100	395
T-IP79C	79C	39C	Solvents Distillation	48 +102°C	0.2	100	395
T-IP80C	80C	40C	Solvents Distillation	72 +126°C	0.2	100	395
T-IP81C	81C	41C	Solvents Distillation	98 +152°C	0.2	100	395
T-IP82C	82C	42C	Solvents Distillation	95 +255°C	0.5	100	395
T-IP83C	83C	102C	Solvents Distillation	123 +177°C	0.2	100	395
T-IP84C	84C	103C	Solvents Distillation	148 +202°C	0.2	100	395
T-IP85C	85C	104C	Solvents Distillation	173 +227°C	0.2	100	395
T-IP86C	86C	105C	Solvents Distillation	198 +252°C	0.2	100	395

Article	IP	ASTM	NAME	RANGE	DIV. (T°)	IMM. (mm)	LENGTH (mm)
T-IP87C	87C	106C	Solvents Distillation	223 +277°C	0.2	100	395
T-IP88C	88C	107C	Solvents Distillation	248 +302°C	0.2	100	395
T-IP89C	89C	113C	Softening Point Wide Range	-1 +175°C	0.5	Total	405
T-IP89F	89F	113F	Softening Point Wide Range	30 +350°F	1	Total	405
T-IP90C	90C	48C	Kinematic Viscosity	80.6 +83.4°C	0.05	Total	305
T-IP90F	90F	48F	Kinematic Viscosity	177.5 +182.5°F	0.1	Total	305
T-IP91C	91C	-	Rapid Flash	0 +110°C	1	44	198
T-IP92C	92C	120C	Kinematic Viscosity	38.6 +41.4°C	0.05	Total	305
T-IP93C	93C	110C	Kinematic Viscosity	133.6 +136.4°C	0.05	Total	305
T-IP94C	94C	122C	Brookfield Viscosity	-45 -35°C	0.1	Total	300
T-IP95C	95C	123C	Brookfield Viscosity	-35 -25°C	0.1	Total	300
T-IP96C	96C	124C	Brookfield Viscosity	-25 -15°C	0.1	Total	300
T-IP97C	97C	125C	Brookfield Viscosity	-15 -5°C	0.1	Total	300
T-IP98C	98C	-	Rapid Flash (High)	100 +300°C	2	44	197
T-IP99C	99C	127C	Kinematic Viscosity	-21.4 -18.6°C	0.05	Total	305
T-IP100C	100C	-	Kinematic Viscosity	78.6 81.4°C	0.05	Total	305
T-IP101C	101C	88C	Medium Pensky-Martens	20 +150°C	1	57	290
T-IP102C	102C	132C	Kin Visk 150°C	148.6 + 151.4°C	0.05	Total	305

ASTM METHOD INDEX

ASTM	PAGE						
D5	32	D893	62	D2420	92	D7236	39
D6	121	D937	32	D2440	81	D7342	35
D36	117	D942	83	D2500	19, 20	D7462	77
D56	44, 45	D943	77	D2547	54	D7667	71
D86	47	D972	104	D2595	105	D7671	71
D87	113	D1019	64	D2709	62	E28	117
D88	5	D1078	47	D2711	62, 98	E102	5
D91	62	D1084	6	D2872	121	E133	47
D92	42, 43	D1094	122	D2878	104	E502	36-39, 44, 45
D93	36, 37, 38	D1120	21	D2884	32		
D95	52	D1142	93	D2893	77		
D96	62	D1160	51	D2983	11		
D97	19, 20	D1177	24	D3143	46		
D113	119	D1200	6	D3235	114		
D127	113	D1263	106	D3278	39		
D129	65	D1264	107	D3286	65		
D130	71	D1265	70	D3427	99		
D139	120	D1266	67	D3603	87		
D156	112	D1267	94	D3828	39		
D189	54	D1290	62	D3934	44, 45		
D216	47	D1298	26	D3941	44, 45		
D217	32, 34	D1310	46	D4212	6		
D240	65	D1319	59	D4006	52		
D244	52, 120	D1321	32	D4007	62		
D270	69	D1322	122	D4048	71		
D287	26	D1384	76	D4057	69		
D322	50	D1401	97	D4072	55		
D323	95	D1403	32, 34	D4176	68		
D381	115	D1551	66	D4310	77		
D402	50	D1657	91	D4340	75		
D445	9, 10	D1665	7	D4422	61		
D446	9, 10	D1742	102	D4636	86		
D447	47	D1743	108	D4742	79		
D454	116	D1748	89	D4809	65		
D473	53	D1754	121	D4814	71		
D482	61	D1796	62	D4870	56		
D483	64	D1831	35	D4950	108, 109		
D524	55	D1837	90	D4953	95		
D525	84	D1838	74	D5125	6		
D566	109	D1881	101	D5452	68		
D572	116	D1966	62	D5534	87		
D611	57, 58	D2001	60	D5853	19, 20		
D665	87	D2002	60	D5865	65		
D721	114	D2112	79	D5968	86		
D808	65	D2158	90	D6082	100		
D816	6	D2170	9, 10	D6084	119		
D849	73	D2265	110	D6184	103		
D850	47	D2272	79	D6371	25		
D852	22	D2273	62	D6468	68		
D873	84	D2274	77	D6560	53		
D874	61	D2382	65	D6594	86		
D892	100	D2386	23	D6997	120		
		D2416	54	D7098	79		

IP AND EN METHODS INDEX

IP	PAGE
2	57, 58
4	61
12	65
13	54
14	55
15	9, 20
16	23
19	98
23	50
27	50
31	111
32	119
34	36, 37, 38
36	42, 43
40	84
45	121
48	81
49	32
50	32, 34
51	69
53	53
55	113
57	122
58	117
59	93
61	65
63	66
69	95
70	3
71	9, 10
72	4
74	52
75	62
77	54
80	118
107	67
112	71
121	103
123	47
125	74
131	115
132	109
133	113
135	87
138	84
142	83
143	53
145	64
146	100
154	71
156	59
157	77

158	114
160	26
161	94
163	61
170	40, 41
179	32
182	54
183	104
195	47
212	7
215	107
219	19, 20
227	71
229	79
235	91
248	54
280	81
287	74
303	39
306	81
307	81
309	25
310	32, 34
313	99
317	90
319	9, 10
335	81
358	52
359	62
371	111
375	56
376	32
388	77
390	56
410	94
411	74
423	68
440	68
441	19, 20
459-1	49
491	44, 45
492	44, 45
523	39
524	39
534	39
540	115

EN	PAGE
116	25
535	6
1426	32
1427	117
1428	52
4256	94
12593	118
12595	9, 10
12606-1	49
12607-1	121
12607-2	121
12662	68
12846-1	4
12846-2	4
13303	121
13357	4
13398	119
13589	119
13703	119
15469	90
22592	42, 43
22719	36, 37, 38
23015	19, 20
26246	115
61125-A	81
61125-B	81
61125-C	81

ISO AND DIN METHODS INDEX

ISO	PAGE
1516	44, 45
1523	44, 45
1716	65
2083	54
2137	32, 34
2160	71
2176	109
2431	6
2592	42, 43
2719	36, 37, 38
2908	114
3007	95
3013	23
3015	19, 20
3016	19, 20
3104	9, 10
3105	9, 10
3170	69
3405	47
3675	26
3679	39
3680	39
3735	53
3837	59
3840	64
3841	113
3987	61
3993	91
4256	94
4262	55
4263	77
4626	47
6245	61
6246	115
6247	100
6251	74
6299	110
6614	97
6615	54
7120	87
7536	84
7624	81
9029	52
9120	99
10307	56
11009	107
12205	77
13736	40, 41
15267	36, 37, 38
22160	71

DIN	PAGE
51360-1	74
51360-2	74
51376	42, 43
51381	99
51411	112
51421	23
51428	25
51551	54
51560	7
51566	100
51571	114
51572	114
51577	65
51579	32
51580	32
51587	77
51595	53
51599	97
51750	69
51751	47
51758	36, 37, 38
51759	71
51768	66
51793	62
51799	84
51780	84
51784	115
51801-1	109
51801-2	111
51807-2	107
51808	83
51817	103
51825	110
52012	118
53015	8
53211	6
53224	6

PRODUCT NUMBER INDEX

120	3
120/2	3
120/3	3
122	3
122/2	3
122/3	3
140	4
140/2	4
140/3	4
140/4	4
180	5
180/2	5
180/3	5
180/4	5
190/...	6
200	6
210	6
220/...	6
260	7
270	7
270/2	7
320	8
330	8
370	9
380	18
390	10
450	10
470	11
490/HS/140	19
500/S	19
510/S	19
520/S	19
530/S	19
540	20
550/300	26
550/450	26
650	32
650/SEM	32
670/AUT	34
670/AUT/2	34
670/MAN	34
680/¼	34
680/½	34
700	35
730	119
730/AUT	119
730/AUT7R	119
730/R	119
750/AUT	38
750/BIS	37
750/BIS/IE	37
750/E	36
750/E/IE	36

750/SEM	38
780	39
820	40
820/AUT	41
820/IE	40
820/SEM	41
880	42
880/AUT	43
880/SEM	43
890	42
930	44
930/AUT	45
930/IE	44
930/SEM	45
950	46
960	54
970	54
980	55
990/3	47
990/3/R	47
990/4	47
990/4/R	47
1000/3	47
1000/3/R	47
1000/4	47
1000/4/R	47
1040	49
1050/E	50
1050/G	50
1070	51
1090	52
1090/2	52
1090/3	52
1100	52
1110	55
1120	50
1130	53
1140	53
1150	56
1170	68
1180	68
1200	64
1210	64
1220	62
1330/20	69
1330/40	69
1335/20	69
1335/40	69
1340	69
1350/A	69
1350/O	69
1360	69
1390/700	69

1390/1200	69
1410	69
1420	69
1430	69
1440	71
1450	73
1450/4	73
1460	66
1490/A/2	67
1490/A/6	67
1490/L/2	67
1490/L/6	67
1550	68
1560	68
1630/...	70
1690	74
1700	90
1730	93
1740/...	94
1750	91
1760	90
1780	92
1790/..	95
1850	97
1840	98
1870	98
1880	99
1900/...	100
1915	101
1920	77
1920/S/4	77
1920/S/8	77
1940/...	87
1970/B	79
1970/P	79
1980	81
1980/S/4	81
1980/S/8	81
1990	86
2010/...	84
2020	83
2020/S	83
2030	102
2035/ASTM	103
2035/IP	103
2050	104
2050/S	105
2060	65
2070	65
2080	112
2080/P	112
2090	113
2100	113

2110	109
2120	111
2130	111
2140	110
2150/A	57
2150/B	57
2150/C	58
2150/D	58
2150/F	58
2170	117
2180	114
2210/125	74
2210/287	74
2220	75
2220/2	75
2240/P/2	59
2240/P/4	59
2240/S/2	59
2240/S/4	59
2280	60
2290	60
2300	92
2310	93
2320	21
2330	76
2330/4	76
2340	22
2370	23
2370/SEM	23
2370/SEM/2	23
2380	24
2380/2	24
2380/SEM	24
2390	116
2410	115
2440	54
2500	89
2520	118
2520/BIS	118
2520/SEM	118
2530	122
2540	25
2540/SEM	25
2550/...	121
2560	121
2570/A	108
2570/P	108
2580	106
2590	107
2700	120
2710	120
2720	61
2730	122