

# CEM Inox

## Stainless Steel hand stacker

Load capacity 1.0 t



Pivoting wheels with parking brake



Stainless steel mast with "C" profile

### TECHNICAL FEATURES

Rated load capacity 1.0 t

Lift height 1,600 mm

Entirely built in Aisi304 Stainless Steel

Stainless Steel hydraulic pump with double-acting valve

Sturdy mast in Stainless Steel with "C" profile  
Maintenance-free sliding bearings

Ergonomic handles for pushing

Pivoting wheels with parking brake  
Stainless steel bearings for rollers & wheels

### FOCUS ON ITS ADVANTAGES

**CEM Inox** is entirely built in AISI304 Stainless Steel to guarantee maximum **hygiene** and **durability over time**.

**Ideal in food and pharmaceutical environment.**

**Completely hygienic and washable** with water also under pressure (IP66).

The push handles are full length, very comfortable for operators of all heights.


The lifting pump is double-acting: **reduces the effort** during lifting and **makes lifting faster** with weights up to about 100 kg.

**CEM Inox** can be built **with different fork or lift measures to suit your needs.**



Comfortable push handles

Features	1.1	Manufacturer		Logimach	
	1.2	Model		CEM IX	
	1.4	Operator type: pedestrian, stand-on		A piedi	
	1.5	Rated load capacity	Q (t)	1,0	
	1.6	Load centre	c (mm)	600	
	1.8	Distance between the centre of the front axle and the back of the forks	x (mm)	341	
	1.9	Wheelbase	y (mm)	997	
	Weights	2.1	Truck weight	kg	260
		Wheels and rollers	3.1	Tyres, Drive end/ Load end (NY = Nylon)	
3.2			Wheel size, drive end	mm	200x50
3.3			Wheel size, load end	mm	82x90
3.6			Track width, drive end	b10 (mm)	573
3.7	Track width, load end		b11 (mm)	370	
Basic dimensions	4.2	Mast, lowered height	h1 (mm)	2.093	
	4.3	Free lift height	h2 (mm)	1.600	
	4.4	Forks, lift height	h3 (mm)	1.515	
	4.5	Mast, extended height	h4 (mm)	2.093	
	4.15	Ground clearance, forks lowered	h13 (mm)	85 (-0+5)	
	4.19	Overall length	l1 (mm)	1.491	
	4.20	Length incl. fork backs	l2 (mm)	341	
	4.21	Overall width	b1 (mm)	716	
	4.22	Fork dimensions	s/e/l (mm)	65/170/1.150	
	4.25	Overall fork width	b5 (mm)	550	
	4.32	Ground clearance, centre of wheelbase	m2 (mm)	20	
	4.34	Working aisle width with 800x1200 pallet lengthways	Ast (mm)	1.804	
	4.35	Turning radius	Wa (mm)	1.110	

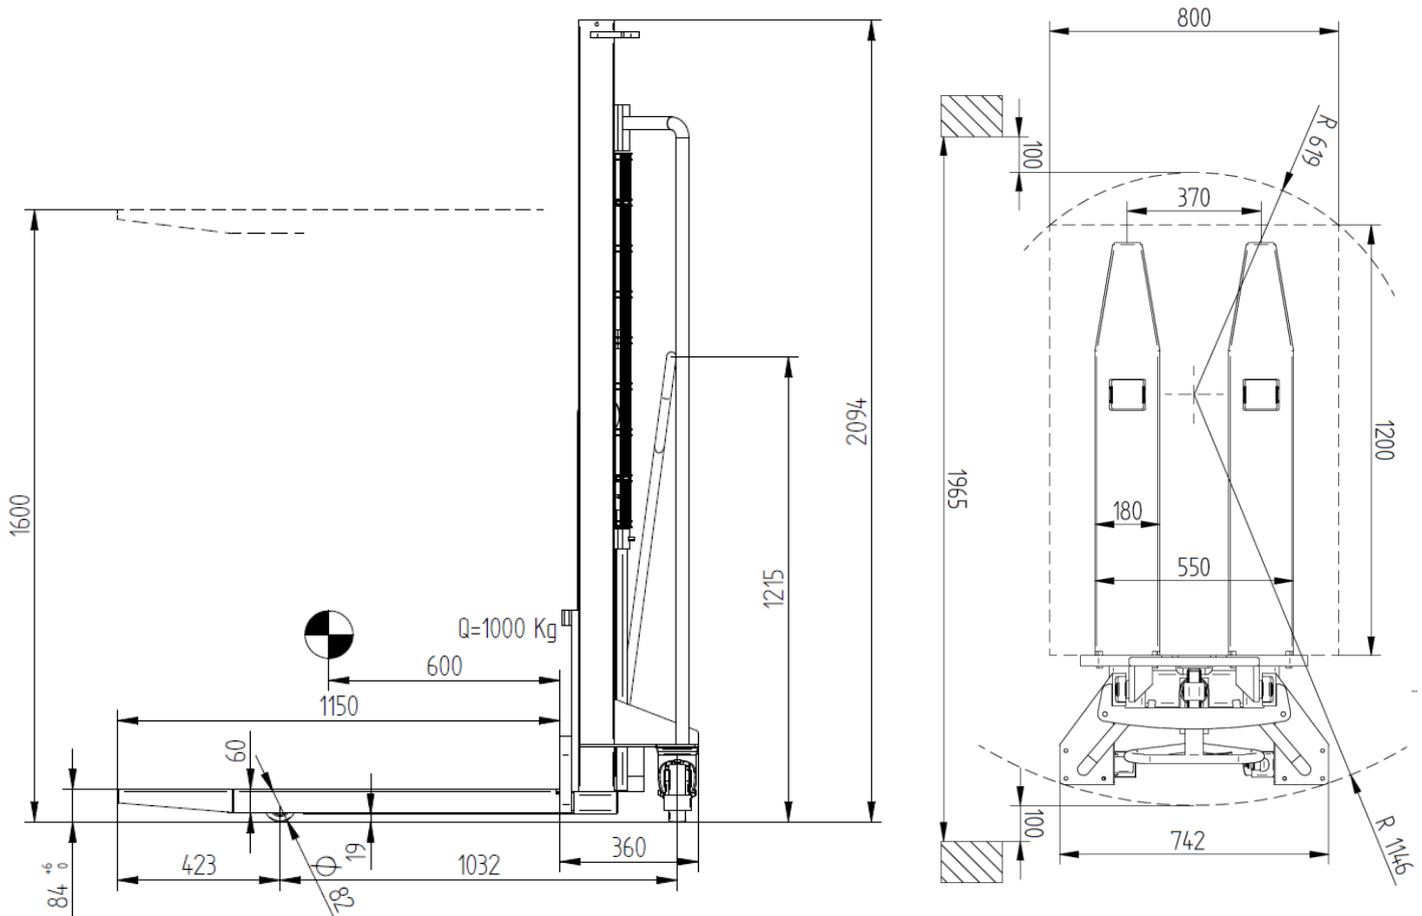

All rights reserved for technical modifications and improvements. Some images in this brochure may show non-standard features.  
 The accuracy of this brochure has been checked before printing.  
 Since we at Carrellificio Cesenate strive to continuously improve our products, we reserve the right of changing the design, technical features, prices, and colours of these items any time.

**CARRELLIFICIO CESENATE DI MINOTTI MARCO & C. SNC**

Via Cerchia di Sant'Egidio, 850- 47521 Cesena (FC) - Italy  
 Tel. +39 0547 381150 - Fax +39 0547 631202  
 info@carrellificiocesenate.it www.logimach.com

Dealer