



# SHX-C05

## Stainless steel semi-electric stacker

### LIGHTWEIGHT AND COMPACT

Easy to move, even by female staff

- ✓ It is very light to moved easily
- ✓ It has two handles for a strong and safe grip
- ✓ It is extremely compact to work well even in narrow spaces

### ELECTRIC LIFTING



The control is electric, with IP67 button panel, you can use it even with wet hands.

Mounted on spring wire to be able to move and work on the lifted load

- ✓ Work more comfortably
- ✓ You are more productive

### MANUAL HYDRAULIC PUMP

With the tiller you can also lift manually.

Why?

So you can use the stacker even if the battery is flat.  
So you don't stop production!



### PERFECT FOR YOUR PRODUCTION

- ✓ Raise the loads to work comfortably
- ✓ Work safely
- ✓ Entirely built in Aisi304 stainless steel
- ✓ Capacity of 500 kg and a lifting height of 1600 mm, just enough for your production

### FULLY WASHABLE

Wash it with a water jet, even under pressure.  
SHX-C05 has an IP56 protection rating  
Guarantee hygiene inside your processing room!

### STANDARD EQUIPMENT

Entirely built in Aisi304 stainless steel  
Protection rating IP56  
Spring-loaded wired push-button panel with up button  
Electric lifting, descent with manual lever  
Lifting pump with tiller for manual lifting

AGM 12V 55Ah battery, hermetic, maintenance-free  
External automatic battery charger


Nylon/polyurethane wheels and rollers



Features	1.1	Manufacturer	Logimach	
	1.2	Model	SHX-C05	
		Supply	Manual/Electric	
	1.5	Rated load capacity	Q (t)	0,5
	1.6	Load centre	c (mm)	600
Weights	1.8	Distance between the centre of the front axle and the back of the forks	x (mm)	715
	1.9	Wheelbase	y (mm)	915
	2.1	Truck weight incl. Battery (see line 6.5)	kg	193
Wheels & rollers	2.2	Axle loading, laden, drive end/load end	Kg	...
	2.3	Axle loading, unladen, drive end/load end	kg	...
Base dimensions	3.1	Tyres, drive end / Load end (NY = Nylon, PU = Polyurethane)		NY-PU
	3.2	Wheel size, drive end	mm	125x40
	3.3	Wheel size, load end	mm	82x70
	4.2	Mast, lowered height	h1 (mm)	2.052
	4.3	Free lift height	h2 (mm)	1.600
	4.4	Forks, lift height	h3 (mm)	1.515
	4.5	Mast, extended height	h4 (mm)	2.052
	4.15	Ground clearance, forks lowered	h13 (mm)	85
	4.19	Overall width	l1 (mm)	1.596
	4.20	Length incl. Fork backs	l2 (mm)	446
	4.21	Overall width	b1 (mm)	792
	4.22	Fork dimensions	s/e/l (mm)	59x150x1.150
	4.25	Overall fork width	b5 (mm)	510
	4.32	Ground clearance, centre of wheelbase	m2 (mm)	26
	4.34	Working aisle width with 800x1,200 pallet lengthways	Ast (mm)	1.848
4.35	Turning radius	Wa (mm)	472	
Electric	6.2	Pump motor, rating at S3 = 10%	kW	0,8
	6.4	Battery voltage, rated capacity K5	V/Ah	12/55
	6.5	Battery weight	kg	19
	8.4	Sound level at driver's ear (ref. EN 12053)	dB(A)	< 70



C05

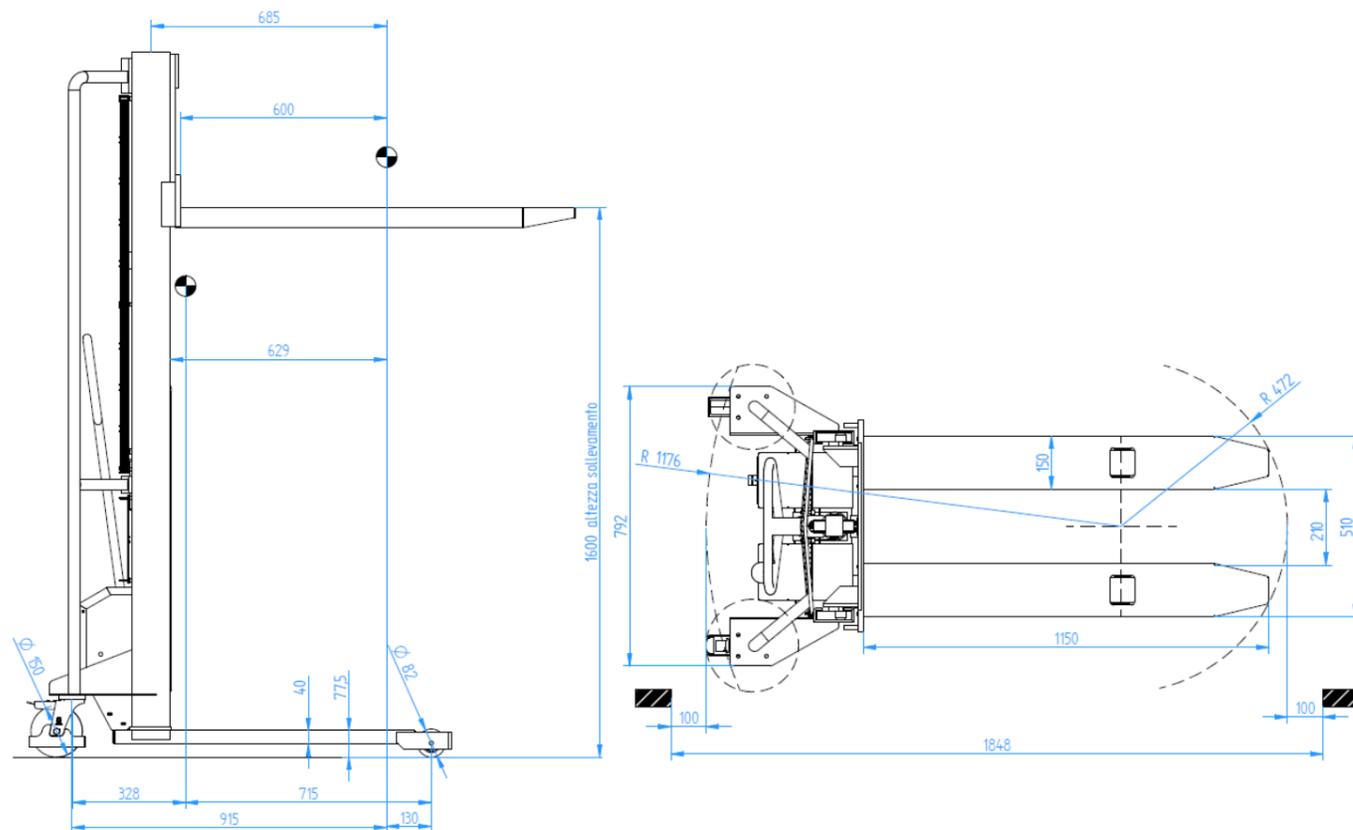

Xsteel è un marchio registrato di Logimach by Carrellificio Cesenate  
Via Cerchia di Sant'Egidio, 850 - 47521 Cesena (FC) - Italy

Tel +39 0547 381150 [www.logimach.com](http://www.logimach.com) - [info@logimach.com](mailto:info@logimach.com)



Stainless steel semi-electric stacker