

# SW501-4000\_8DC




- High-performance Ethernet Switch
- Designed to meet which critical network environment M12 connectors
- EN50155 certified
- It is best for railway in train/track side, vehicle and mining applications
- For more usage flexibilities, supports wide operating temperature from -40~75°C



The actual appearance is subject to the final configuration.

## Specifications

<b>MODEL</b>	SW501-4000_8DC	
<b>Attributes</b>	Networking Interfaces	8 x 100/1000/2500Base-TX with X-coded M12 connectors
	LED Indicators	Power, Link/Act, Speed
	Power Supply	12 -60 V DC
<b>Performance</b>	Switching Capacity	40 Gbps
	Forwarding Capacity	29.76 Mpps
	Forwarding Mode	Store and Forward
	Packet Buffer Memory	12 Mbit
	MAC Address Table	16K
<b>Environment</b>	Operating Temperature	-40°C ~ 75°C
	Storage Temperature	-40°C ~ 75°C
	Relative Humidity	5% RH – 95% RH (non-condensing)
	Dimensions	292(L) x 147.5(W) x 47.5(H)mm
	Net Weight	-
	Power Consumption	15 W
<b>Regulation</b>	EMC	FCC, CE, RoHS, EN50155

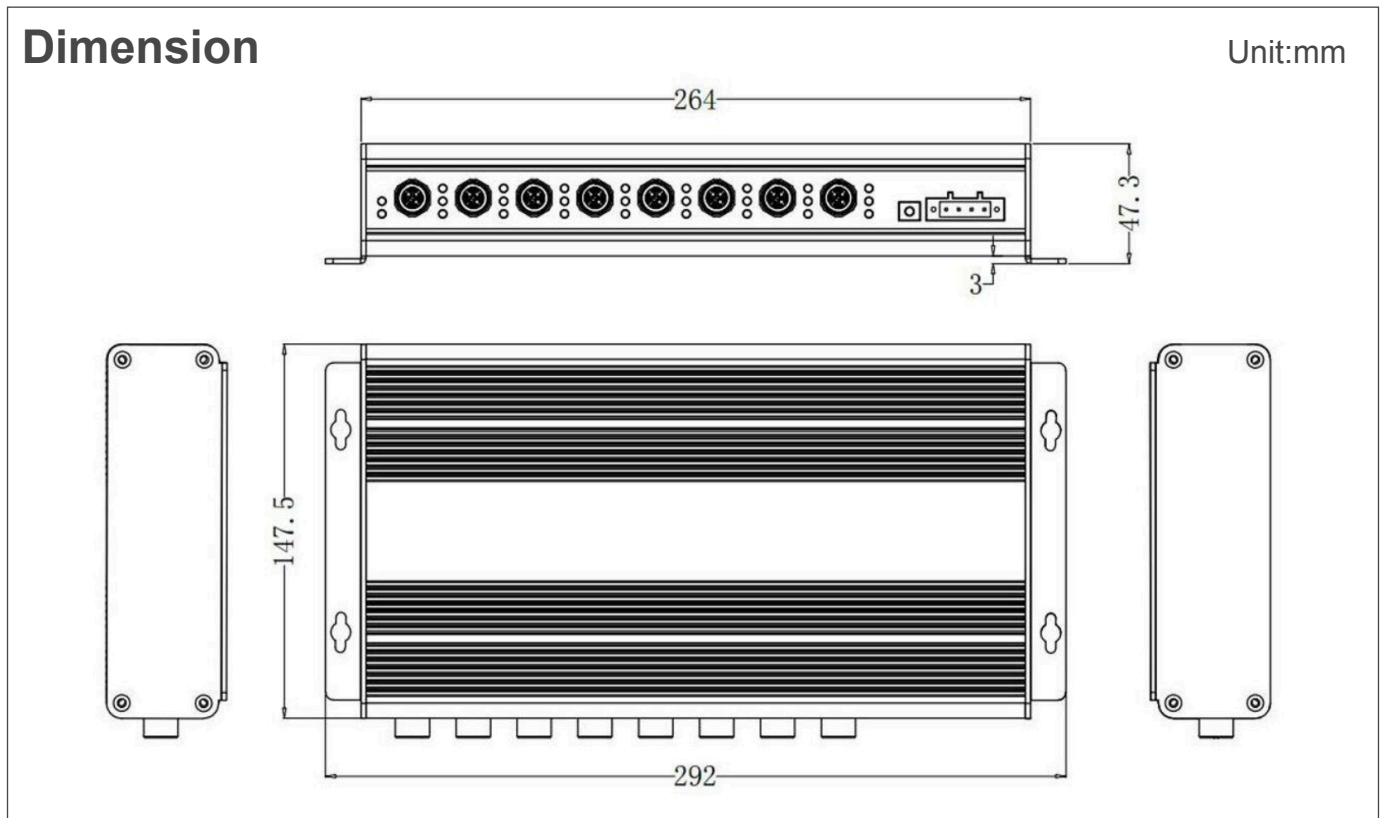

The actual appearance and dimensions are subject to the final configuration

## Ordering Information

M12 CONNECTORS	Switching Capacity	Forwarding Capacity	Packet Buffer Memory	MAC Address	Max Power Consumption	Power Supply
8	40 Gbps	29.76 Mpps	12 Mbit	16K	15 W	12-60 V DC

## Packing List

Default Items	Qty
SW501-4000_8DC Unit	1
Power Adapter	1
User Manual	1
Power Cord	1
Rubber Feet	1

All products and company name listed are trademarks or trade names of their respective companies.