

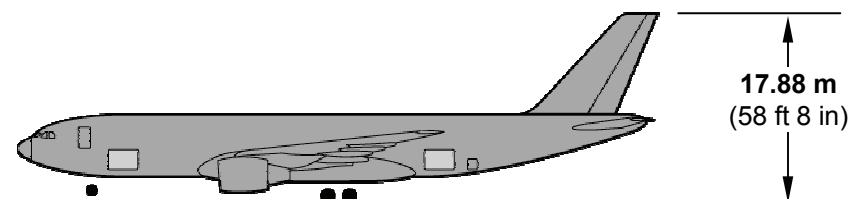


Airbus A330-200 Freighter

General arrangement

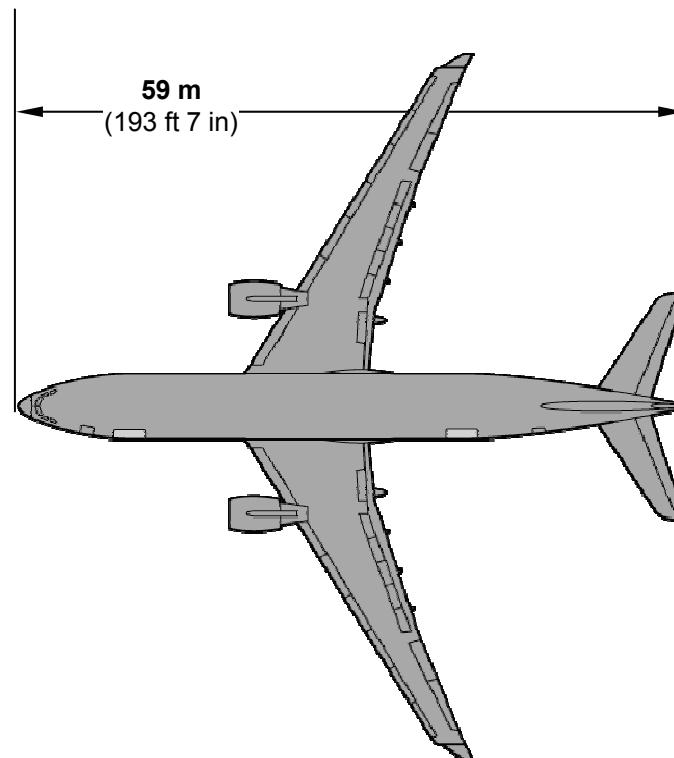

Source: Boeing data

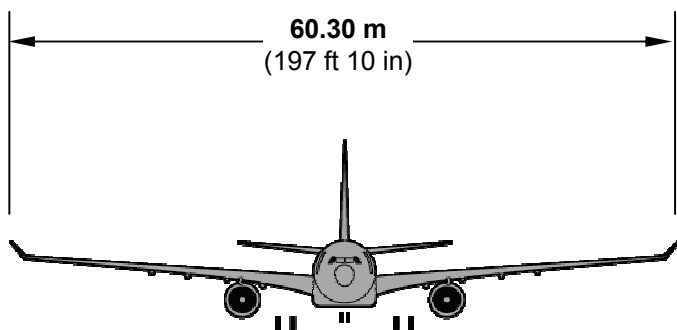

Airbus A330-200 Freighter

Performance summary, Pratt & Whitney PW4168A engines

		A330-200F	
		Range mode	Payload mode
Main deck (22) 2.4 x 3.2-m (96 x 125-in) pallet/container cargo capacity	m³ (ft³)	335.0 (11,840)	335.0 (11,840)
Lower hold (2) LD-3s, (8) 2.4 x 3.2-m (96 x 125-in) pallets, plus bulk^a	m³ (ft³)	122.7 (4,335)	122.7 (4,335)
Total cargo volume	m³ (ft³)	457.7 (16,175)	457.7 (16,175)
Maximum takeoff weight	kg (lb)	233,000 (513,700)	226,980 (500,400)
Maximum landing weight	kg (lb)	181,980 (401,200)	187,015 (412,300)
Maximum zero fuel weight	kg (lb)	173,000 (381,400)	177,990 (392,400)
Revenue payload (MZFW-OEW)^b	kg (lb)	60,100 (132,500)	65,090 (143,500)
Fuel capacity	L (U.S. gal)	139,100 (36,750)	139,100 (36,750)
Design range (MZFW payload)	nmi (km)	3,945 (7,305)	3, 095 (5,730)

^a Bulk hold volume: 19.7 m³ (695 ft³)


^b Does not include tare weight

Source: Boeing data



Airbus A330-200 Freighter


Payload-range capability, Pratt & Whitney PW4168A engines

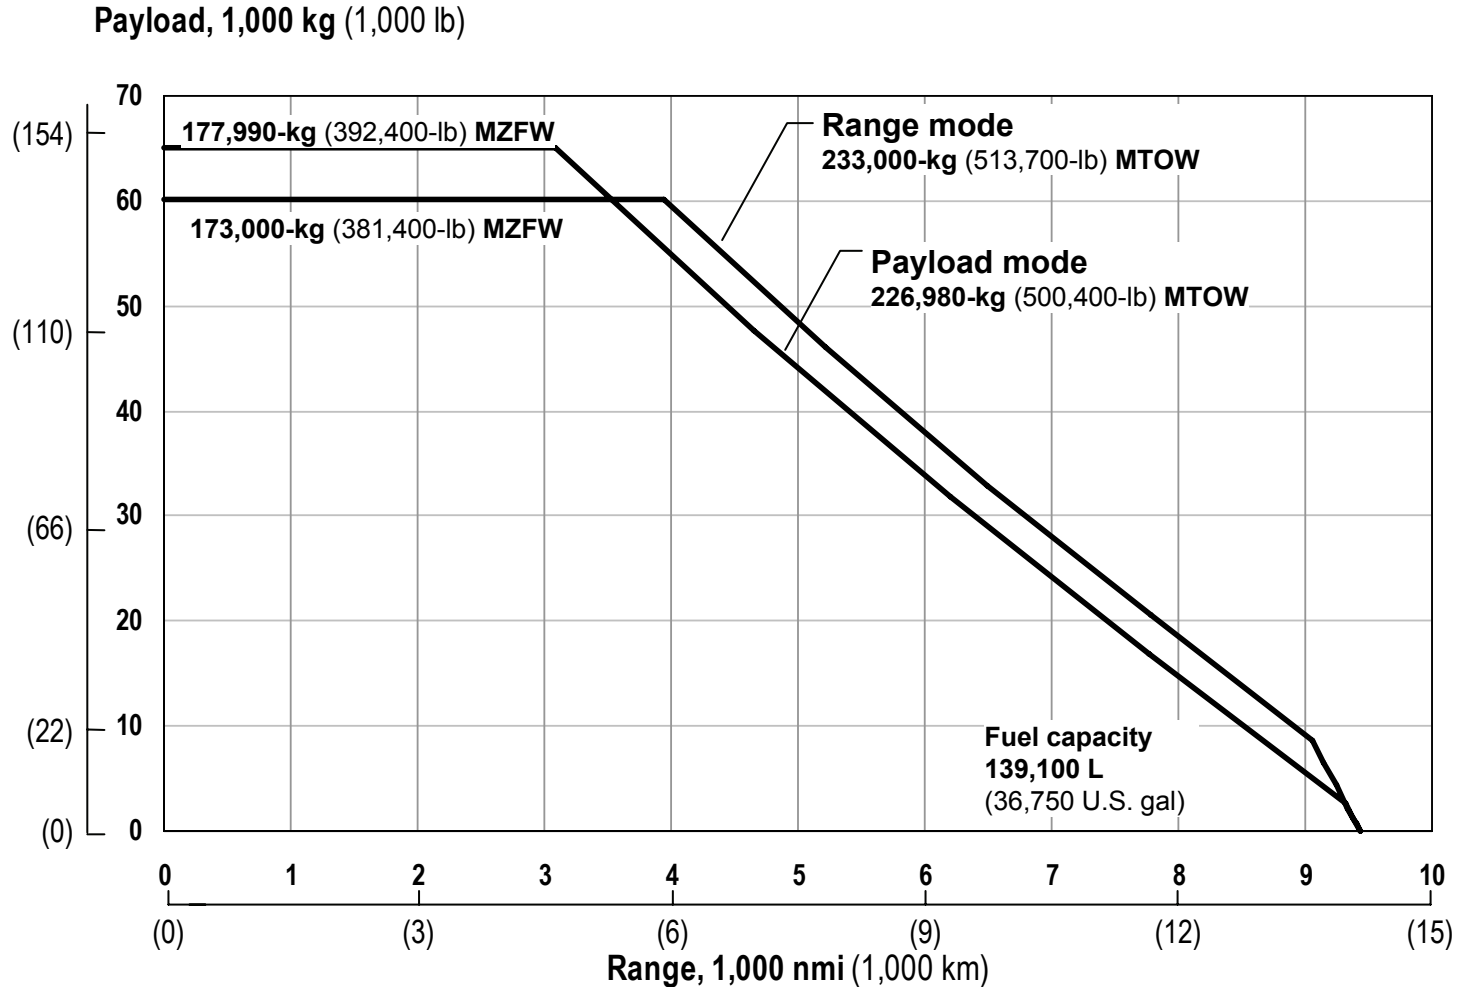

Source: Boeing data

Airbus A330-200 Freighter

Cross section

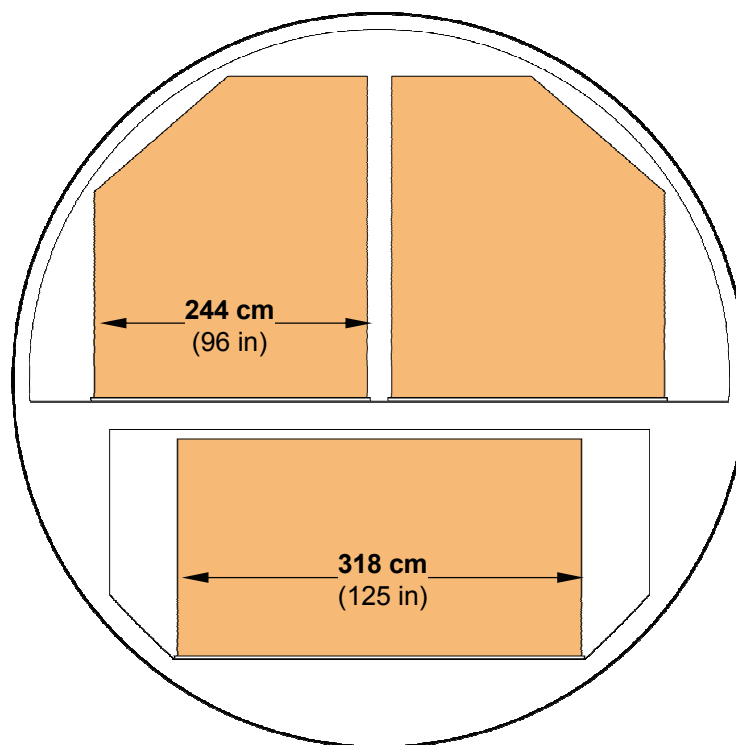


Source: Boeing data



Airbus A330-200 Freighter

Main deck cargo arrangement

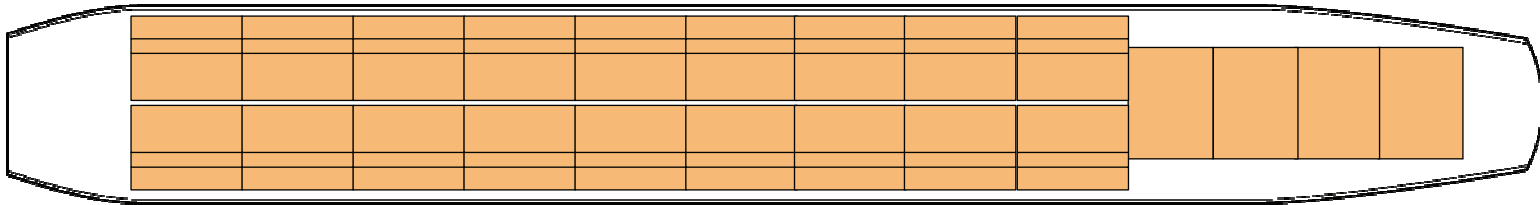


22 contoured pallets or containers, 2.4 x 3.2-m (96- x 125-in)

Main deck volume, 335.0 m³ (11,840 ft³)

Airbus A330-200 Freighter

Lower hold cargo arrangement

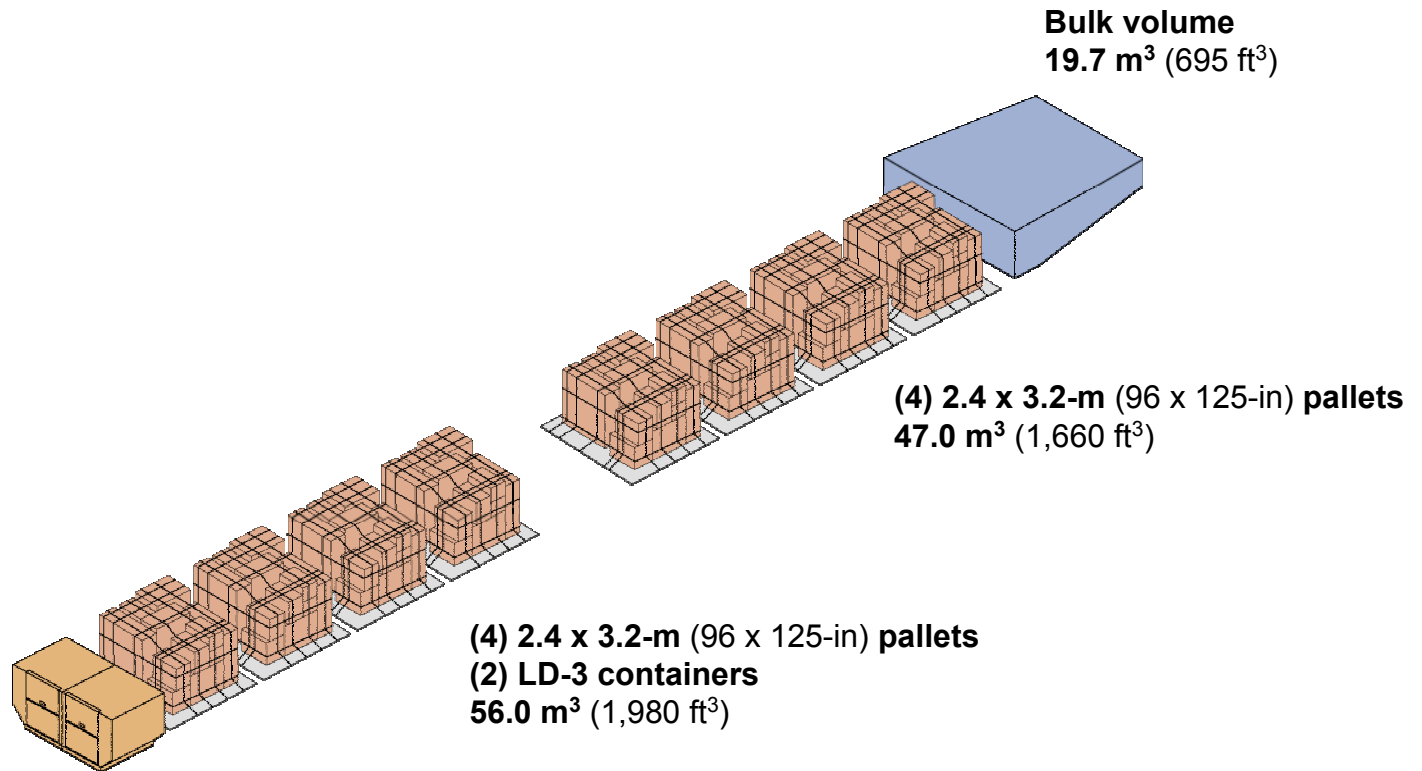

Source: Boeing data

